



TRAAP

Texas Refinery Advanced Analysis Program

OIL ANALYSIS REPORT

WEAR	NORMAL
CONTAMINATION	ABNORMAL
FLUID CONDITION	NORMAL

Machine Id
CATERPILLAR 972M L08 A8P00389

Component
Transmission (Manual)

Fluid
CHEVRON DELO TORQFORCE SAE 30 (12 GAL)

RECOMMENDATION

No corrective action is recommended at this time. Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		TR06100277	---	---
Sample Date		Client Info		08 Feb 2024	---	---
Machine Age	hrs	Client Info		11655	---	---
Oil Age	hrs	Client Info		0	---	---
Filter Age	hrs	Client Info		0	---	---
Oil Changed		Client Info		Not Changd	---	---
Filter Changed		Client Info		Not Changd	---	---
Sample Status				ABNORMAL	---	---

WEAR

All component wear rates are normal.

Iron	ppm	ASTM D5185m	>200	85	---	---
Chromium	ppm	ASTM D5185m	>5	0	---	---
Nickel	ppm	ASTM D5185m	>5	0	---	---
Titanium	ppm	ASTM D5185m		0	---	---
Silver	ppm	ASTM D5185m	>7	0	---	---
Aluminum	ppm	ASTM D5185m	>25	5	---	---
Lead	ppm	ASTM D5185m	>45	20	---	---
Copper	ppm	ASTM D5185m	>225	218	---	---
Tin	ppm	ASTM D5185m	>10	13	---	---
Vanadium	ppm	ASTM D5185m		0	---	---
White Metal	scalar	*Visual	NONE	NONE	---	---
Yellow Metal	scalar	*Visual	NONE	NONE	---	---

CONTAMINATION













There is a light concentration of water present in the fluid.

Silicon	ppm	ASTM D5185m	>125	9	---	---
Potassium	ppm	ASTM D5185m	>20	1	---	---
Water	%	ASTM D6304	>0.1	▲ 0.102	---	---
ppm Water	ppm	ASTM D6304	>1000	▲ 1020	---	---
Silt	scalar	*Visual	NONE	NONE	---	---
Debris	scalar	*Visual	NONE	NONE	---	---
Sand/Dirt	scalar	*Visual	NONE	NONE	---	---
Appearance	scalar	*Visual	NORML	NORML	---	---
Odor	scalar	*Visual	NORML	NORML	---	---
Emulsified Water	scalar	*Visual	>0.1	0.2%	---	---

FLUID CONDITION

The AN level is acceptable for this fluid. The condition of the fluid is suitable for further service.

Sodium	ppm	ASTM D5185m		7	---	---
Boron	ppm	ASTM D5185m	4	21	---	---
Barium	ppm	ASTM D5185m		0	---	---
Molybdenum	ppm	ASTM D5185m		<1	---	---
Manganese	ppm	ASTM D5185m		2	---	---
Magnesium	ppm	ASTM D5185m	13	17	---	---
Calcium	ppm	ASTM D5185m	4000	3074	---	---
Phosphorus	ppm	ASTM D5185m	990	1021	---	---
Zinc	ppm	ASTM D5185m	1310	1185	---	---
Sulfur	ppm	ASTM D5185m	3010	5064	---	---
Acid Number (AN)	mg KOH/g	ASTM D8045	1.2	1.559	---	---
Visc @ 40°C	cSt	ASTM D445	88	66.3	---	---
Visc @ 100°C	cSt	ASTM D445	11	9.8	---	---
Viscosity Index (VI)	Scale	ASTM D2270	110	130	---	---

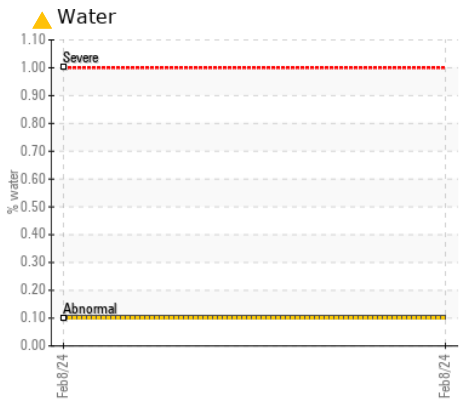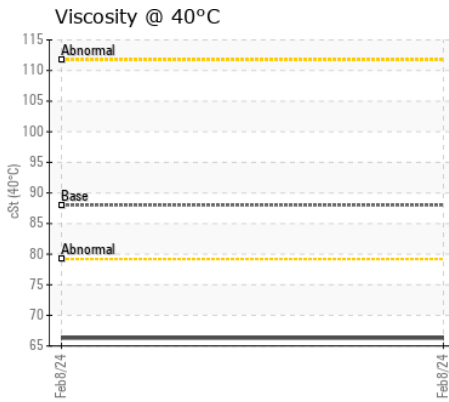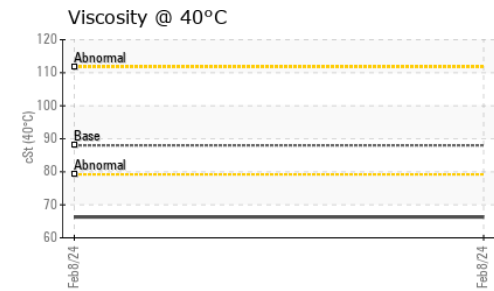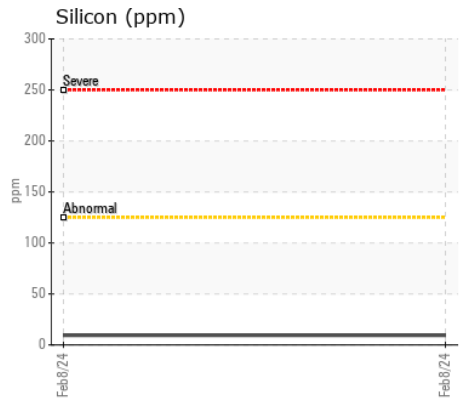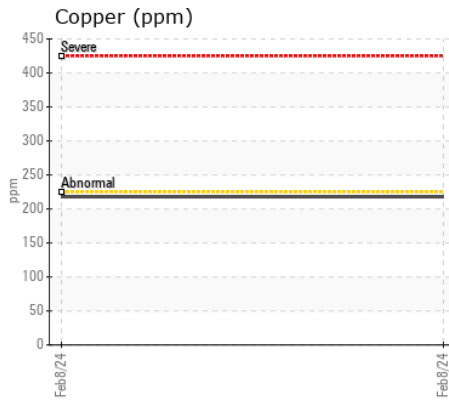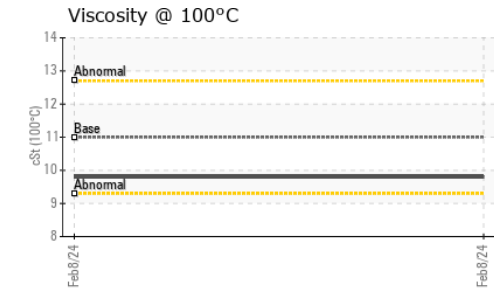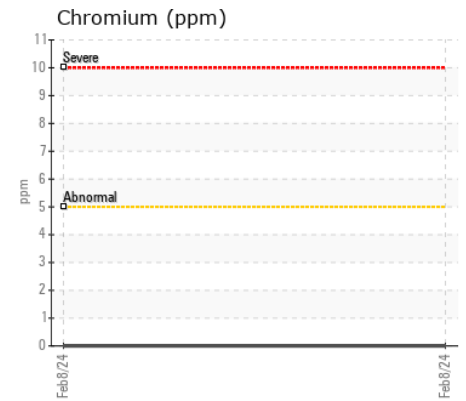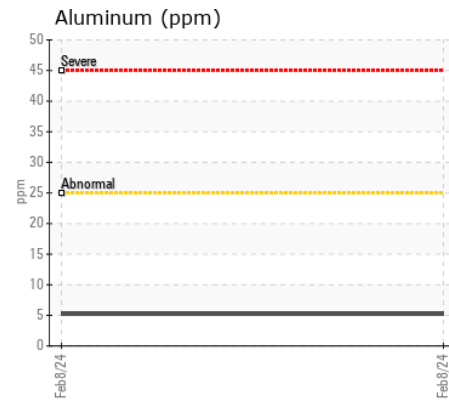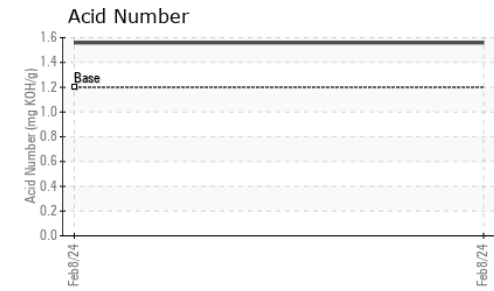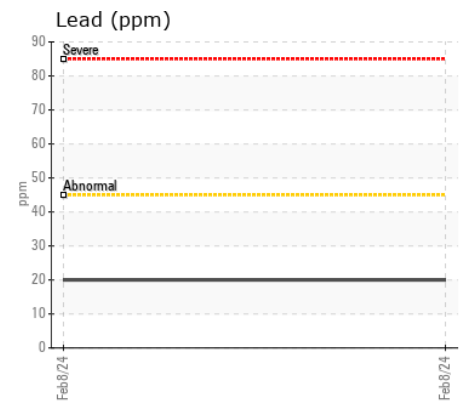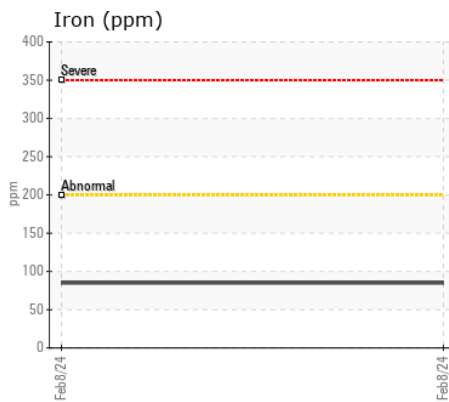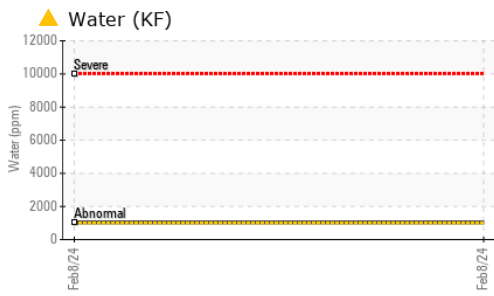

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : TR06100277 **Received** : 26 Feb 2024
Lab Number : 06100277 **Tested** : 28 Feb 2024
Unique Number : 10898507 **Diagnosed** : 28 Feb 2024 - Jonathan Hester
Test Package : MOB 2 (Additional Tests: KF, KV100, VI)

BARR-TECH COMPOSTING
 9117 KALLENBERGER RD N
 SPRAGUE, WA
 US 99032
 Contact: SCOTT DEATHERAGE
 SCOTT@BARR-TECH.NET

To discuss this sample report, contact Customer Service at 1-800-827-0711.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T:
F: