



WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL

Area
[W08605]
 Machine Id
JOHN DEERE 1025R 60003167 (S/N NOT GIVEN)
 Component
Transmission
 Fluid
JOHN DEERE HY-GARD HYD/TRANS LOW VIS (--- GAL)

RECOMMENDATION

Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		JR0204528	---	---
Sample Date		Client Info		22 Feb 2024	---	---
Machine Age	hrs	Client Info		44	---	---
Oil Age	hrs	Client Info		44	---	---
Filter Age	hrs	Client Info		44	---	---
Oil Changed		Client Info		Not Changed	---	---
Filter Changed		Client Info		Not Changed	---	---
Sample Status				NORMAL	---	---

WEAR

All component wear rates are normal.

PQ		ASTM D8184	>100	15	---	---
Iron	ppm	ASTM D5185m	>61	18	---	---
Chromium	ppm	ASTM D5185m	>10	0	---	---
Nickel	ppm	ASTM D5185m		0	---	---
Titanium	ppm	ASTM D5185m		0	---	---
Silver	ppm	ASTM D5185m		0	---	---
Aluminum	ppm	ASTM D5185m	>20	3	---	---
Lead	ppm	ASTM D5185m	>9	3	---	---
Copper	ppm	ASTM D5185m	>100	19	---	---
Tin	ppm	ASTM D5185m	>3	<1	---	---
Vanadium	ppm	ASTM D5185m		0	---	---
White Metal	scalar	*Visual	NONE	NONE	---	---
Yellow Metal	scalar	*Visual	NONE	NONE	---	---

CONTAMINATION






There is no indication of any contamination in the fluid.

Silicon	ppm	ASTM D5185m	>21	14	---	---
Potassium	ppm	ASTM D5185m	>20	3	---	---
Water		WC Method	>0.075	NEG	---	---
Silt	scalar	*Visual	NONE	NONE	---	---
Debris	scalar	*Visual	NONE	NONE	---	---
Sand/Dirt	scalar	*Visual	NONE	NONE	---	---
Appearance	scalar	*Visual	NORML	NORML	---	---
Odor	scalar	*Visual	NORML	NORML	---	---
Emulsified Water	scalar	*Visual	>0.075	NEG	---	---

FLUID CONDITION

The condition of the fluid is acceptable for the time in service.

Sodium	ppm	ASTM D5185m	>30	3	---	---
Boron	ppm	ASTM D5185m		3	---	---
Barium	ppm	ASTM D5185m		3	---	---
Molybdenum	ppm	ASTM D5185m		<1	---	---
Manganese	ppm	ASTM D5185m		2	---	---
Magnesium	ppm	ASTM D5185m		102	---	---
Calcium	ppm	ASTM D5185m		3357	---	---
Phosphorus	ppm	ASTM D5185m		973	---	---
Zinc	ppm	ASTM D5185m		1243	---	---
Sulfur	ppm	ASTM D5185m		3509	---	---
Visc @ 40°C	cSt	ASTM D445	32	31.9	---	---

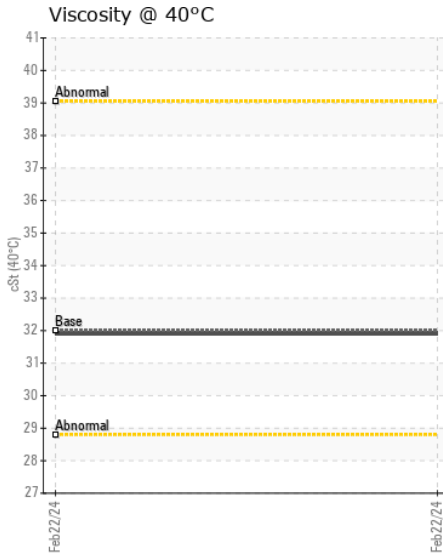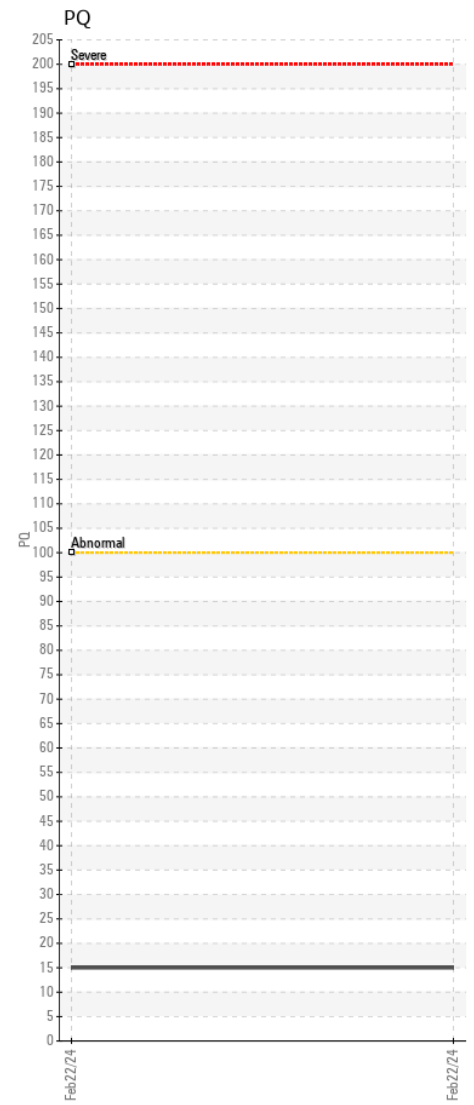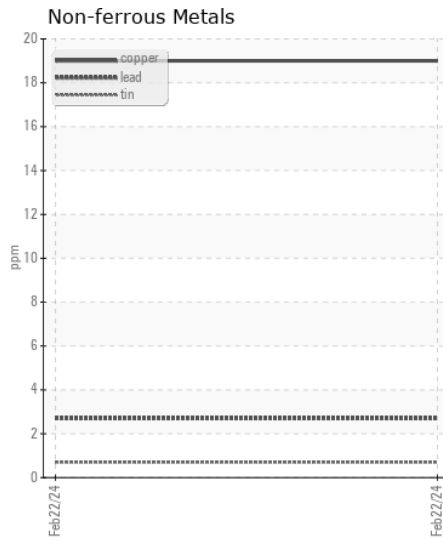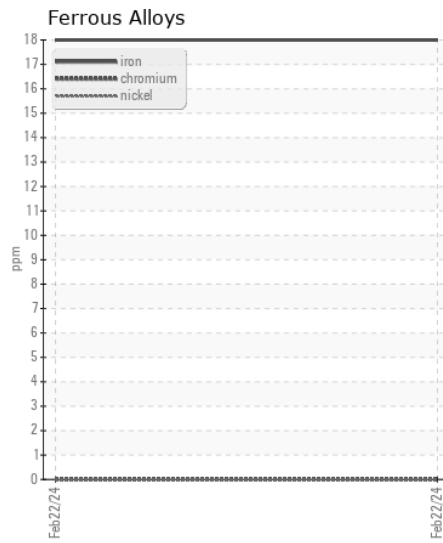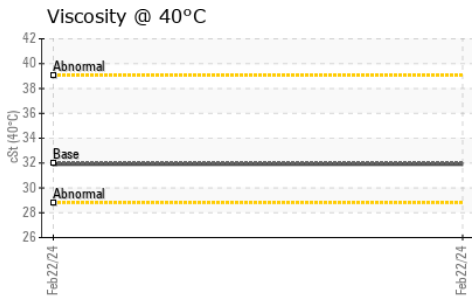

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : JR0204528 **Received** : 26 Feb 2024
Lab Number : 06100316 **Tested** : 01 Mar 2024
Unique Number : 10898546 **Diagnosed** : 01 Mar 2024 - Don Baldrige
Test Package : CONST (Additional Tests: PQ)

JRE - NEWTON
 2616 NW BLVD
 NEWTON, NC
 US 28658

Contact: J DEMAS
 jdemas@jamesriverequipment.com

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T: (828)322-4300

F: