



OIL ANALYSIS REPORT

WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL



Area
[147699]
 Machine Id
JOHN DEERE 210GLC 1FF210GXPNF529831
 Component
Swing Drive
 Fluid
JOHN DEERE HY-GARD HYD/TRANS (2 GAL)

RECOMMENDATION

Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		LEC0047330	LEC0044254	LEC0041750
Sample Date		Client Info		21 Feb 2024	18 Oct 2023	31 May 2023
Machine Age	hrs	Client Info		2329	1724	1113
Oil Age	hrs	Client Info		605	611	1113
Filter Age	hrs	Client Info		0	0	0
Oil Changed		Client Info		Changed	Changed	Changed
Filter Changed		Client Info		N/A	N/A	None
Sample Status				NORMAL	ATTENTION	NORMAL

WEAR

All component wear rates are normal.

PQ		ASTM D8184		33	5	44
Iron	ppm	ASTM D5185m	>151	98	1	275
Chromium	ppm	ASTM D5185m	>11	<1	<1	3
Nickel	ppm	ASTM D5185m	>10	0	<1	0
Titanium	ppm	ASTM D5185m		<1	<1	<1
Silver	ppm	ASTM D5185m		0	0	0
Aluminum	ppm	ASTM D5185m	>21	1	2	0
Lead	ppm	ASTM D5185m	>51	<1	<1	0
Copper	ppm	ASTM D5185m	>51	<1	<1	2
Tin	ppm	ASTM D5185m	>10	<1	0	0
Vanadium	ppm	ASTM D5185m		0	0	0
White Metal	scalar	*Visual	NONE	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	NONE

CONTAMINATION







There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185m	>31	13	6	17
Potassium	ppm	ASTM D5185m	>20	3	2	4
Water		WC Method	>0.1	NEG	NEG	NEG
Silt	scalar	*Visual	NONE	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.1	NEG	NEG	NEG

FLUID CONDITION

The condition of the oil is acceptable for the time in service.

Sodium	ppm	ASTM D5185m	>51	<1	0	2
Boron	ppm	ASTM D5185m	6	27	● <1	46
Barium	ppm	ASTM D5185m	0	<1	9	0
Molybdenum	ppm	ASTM D5185m	0	3	1	0
Manganese	ppm	ASTM D5185m		2	0	5
Magnesium	ppm	ASTM D5185m	145	84	● 89	<1
Calcium	ppm	ASTM D5185m	3570	2402	● 3129	112
Phosphorus	ppm	ASTM D5185m	1290	840	● 1020	489
Zinc	ppm	ASTM D5185m	1640	900	● 1150	24
Sulfur	ppm	ASTM D5185m		6408	● 5435	16285
Visc @ 40°C	cSt	ASTM D445	57.0	76.4	● 63.2	187

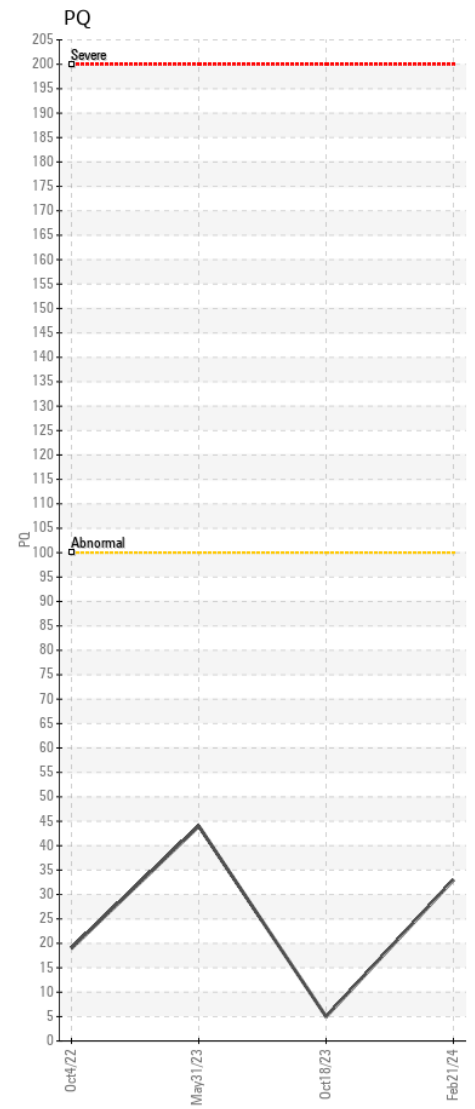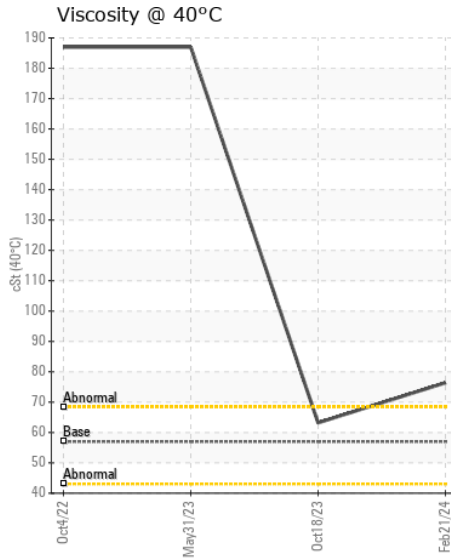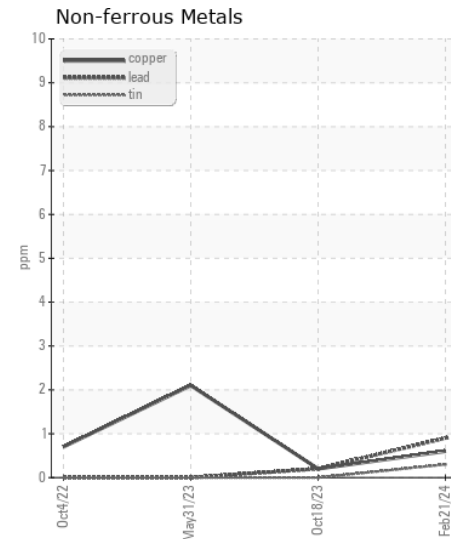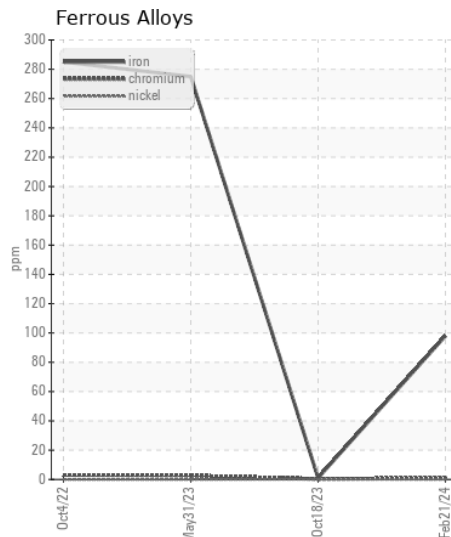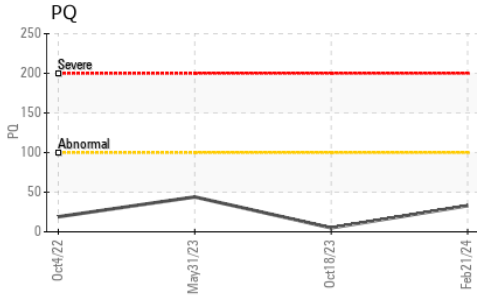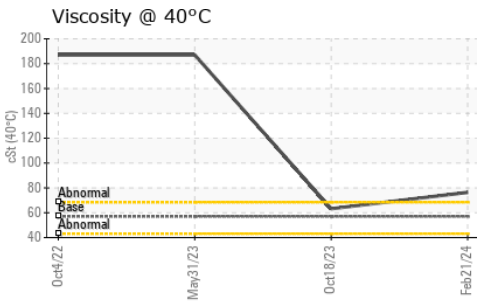

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : LEC0047330 **Received** : 26 Feb 2024
Lab Number : **06100378** **Tested** : 27 Feb 2024
Unique Number : 10898608 **Diagnosed** : 28 Feb 2024 - Sean Felton
Test Package : CONST (Additional Tests: PQ)

LESLIE EQUIPMENT COMPANY
 105 TENNIS CENTER DR.
 MARIETTA, OH
 US 45750-9765
 Contact: LEANNE KENDALL
 KendalLeanne@lec1.com

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T:
 F: (740)373-5570