



VOLVO

OIL ANALYSIS REPORT

WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	ATTENTION



Machine Id
VOLVO A40G 353407
Component
Drop Box
Fluid
MOBIL MOBILUBE HD 80W90 (--- GAL)

RECOMMENDATION

The oil change at the time of sampling has been noted. Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		VCP416820	---	---
Sample Date		Client Info		13 Feb 2024	---	---
Machine Age	hrs	Client Info		1268	---	---
Oil Age	hrs	Client Info		871	---	---
Filter Age	hrs	Client Info		0	---	---
Oil Changed		Client Info		Changed	---	---
Filter Changed		Client Info		Not Changed	---	---
Sample Status				ATTENTION	---	---

WEAR

All component wear rates are normal.

Iron	ppm	ASTM D5185m	>500	65	---	---
Chromium	ppm	ASTM D5185m	>20	<1	---	---
Nickel	ppm	ASTM D5185m	>10	<1	---	---
Titanium	ppm	ASTM D5185m		0	---	---
Silver	ppm	ASTM D5185m		0	---	---
Aluminum	ppm	ASTM D5185m	>30	<1	---	---
Lead	ppm	ASTM D5185m	>30	1	---	---
Copper	ppm	ASTM D5185m	>30	7	---	---
Tin	ppm	ASTM D5185m	>20	<1	---	---
Vanadium	ppm	ASTM D5185m		0	---	---
White Metal	scalar	*Visual	NONE	NONE	---	---
Yellow Metal	scalar	*Visual	NONE	NONE	---	---

CONTAMINATION











There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185m	>50	47	---	---
Potassium	ppm	ASTM D5185m	>20	4	---	---
Water		WC Method	>0.2	NEG	---	---
Silt	scalar	*Visual	NONE	NONE	---	---
Debris	scalar	*Visual	NONE	NONE	---	---
Sand/Dirt	scalar	*Visual	NONE	NONE	---	---
Appearance	scalar	*Visual	NORML	NORML	---	---
Odor	scalar	*Visual	NORML	NORML	---	---
Emulsified Water	scalar	*Visual	>0.2	NEG	---	---

FLUID CONDITION

The oil viscosity is lower than normal. Additive levels indicate the addition of a different brand, or type of oil. Confirm oil type.

Sodium	ppm	ASTM D5185m		8	---	---
Boron	ppm	ASTM D5185m		139	---	---
Barium	ppm	ASTM D5185m		0	---	---
Molybdenum	ppm	ASTM D5185m		10	---	---
Manganese	ppm	ASTM D5185m		2	---	---
Magnesium	ppm	ASTM D5185m		2	---	---
Calcium	ppm	ASTM D5185m		50	---	---
Phosphorus	ppm	ASTM D5185m		1933	---	---
Zinc	ppm	ASTM D5185m		72	---	---
Sulfur	ppm	ASTM D5185m		24121	---	---
Visc @ 40°C	cSt	ASTM D445	136	52.0	---	---

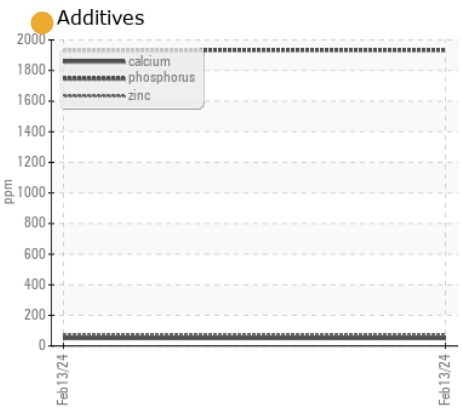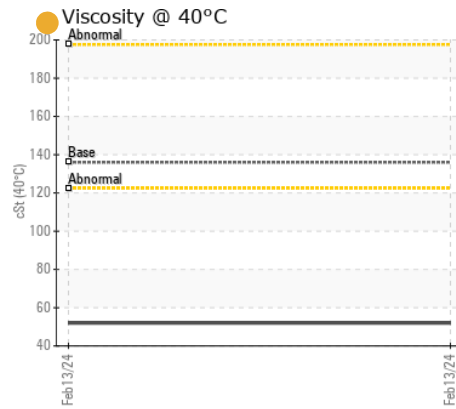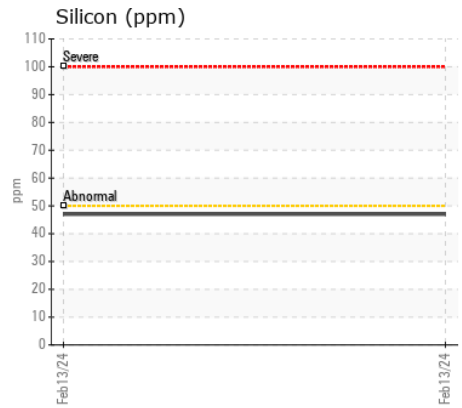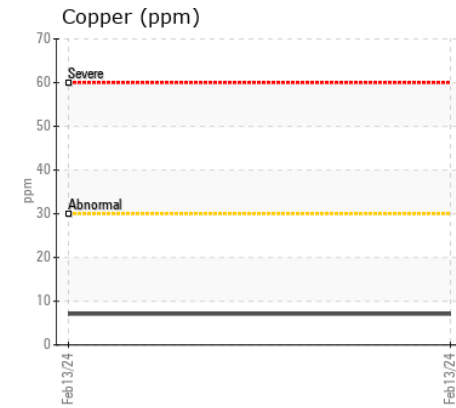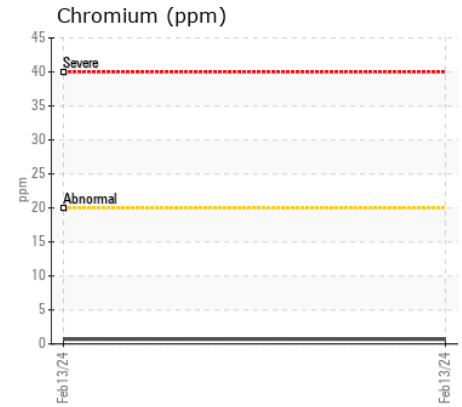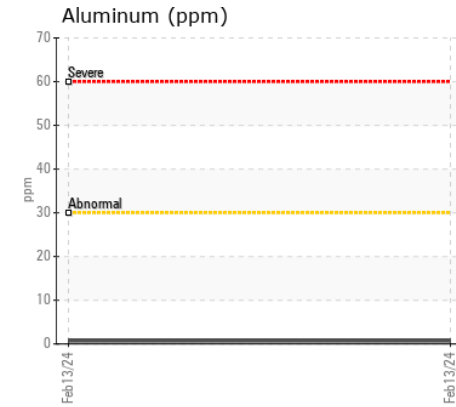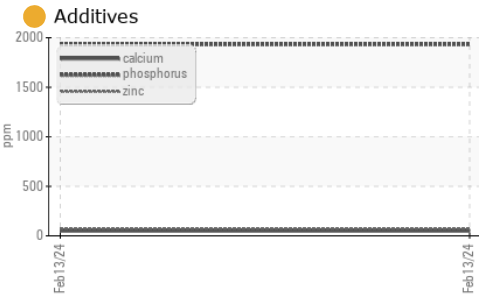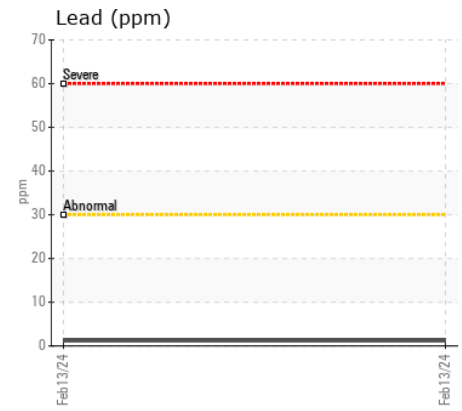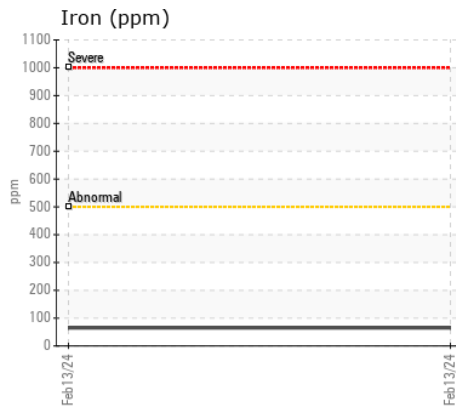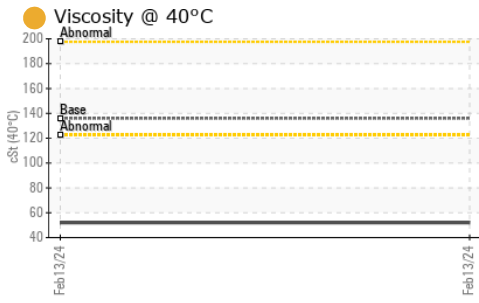

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : VCP416820
Lab Number : 06100407
Unique Number : 10898637
Test Package : MOB 1

Received : 26 Feb 2024
Tested : 27 Feb 2024
Diagnosed : 28 Feb 2024 - Jonathan Hester

SCHILDBERG CONSTRUCTION COMPANY
 PO BOX 358
 GREENFIELD, IA
 US 50849
 Contact: SCOTT ARMSTRONG
 sarmstrong@schildberg.com
 T: (641)743-8237
 F: (641)743-2486

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)