



WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL

Machine Id
T310
 Component
Rear Differential
 Fluid
CHEVRON DELO SYNTHETIC GEAR 75W90 (--- QTS)

RECOMMENDATION

Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		PCA0116115	PCA0058877	PCA0054620
Sample Date		Client Info		22 Feb 2024	11 Apr 2022	04 Aug 2021
Machine Age	mls	Client Info		228495	75219	0
Oil Age	mls	Client Info		100540	75219	0
Filter Age	mls	Client Info		0	0	0
Oil Changed		Client Info		Changed	Not Changd	N/A
Filter Changed		Client Info		Changed	Not Changd	N/A
Sample Status				NORMAL	NORMAL	NORMAL

WEAR

All component wear rates are normal.

Iron	ppm	ASTM D5185m	>500	105	38	98
Chromium	ppm	ASTM D5185m	>10	<1	<1	<1
Nickel	ppm	ASTM D5185m	>10	0	0	<1
Titanium	ppm	ASTM D5185m		<1	0	<1
Silver	ppm	ASTM D5185m		0	<1	0
Aluminum	ppm	ASTM D5185m	>25	4	1	0
Lead	ppm	ASTM D5185m	>25	1	0	0
Copper	ppm	ASTM D5185m	>100	<1	<1	2
Tin	ppm	ASTM D5185m	>10	0	<1	<1
Vanadium	ppm	ASTM D5185m		0	0	0
White Metal	scalar	*Visual	NONE	NONE	NONE	MODER
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	NONE

CONTAMINATION





There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185m	>75	32	6	18
Potassium	ppm	ASTM D5185m	>20	<1	0	1
Water		WC Method	>.2	NEG	NEG	NEG
Silt	scalar	*Visual	NONE	MODER	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	LIGHT	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>.2	NEG	NEG	NEG

FLUID CONDITION

The condition of the oil is acceptable for the time in service.

Sodium	ppm	ASTM D5185m		2	2	10
Boron	ppm	ASTM D5185m		187	236	285
Barium	ppm	ASTM D5185m		0	0	0
Molybdenum	ppm	ASTM D5185m		10	7	<1
Manganese	ppm	ASTM D5185m		4	3	13
Magnesium	ppm	ASTM D5185m		88	84	<1
Calcium	ppm	ASTM D5185m		175	111	7
Phosphorus	ppm	ASTM D5185m		1127	1483	1427
Zinc	ppm	ASTM D5185m		145	110	5
Sulfur	ppm	ASTM D5185m		17878	20327	23295
Visc @ 40°C	cSt	ASTM D445	106	82.6	91.9	99.1

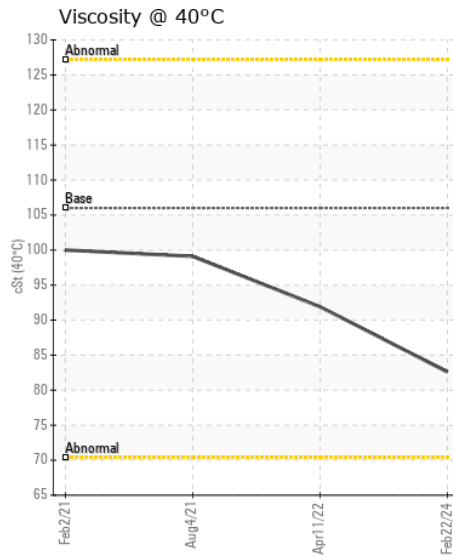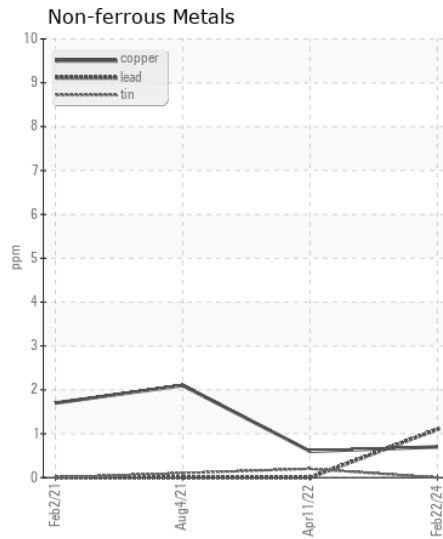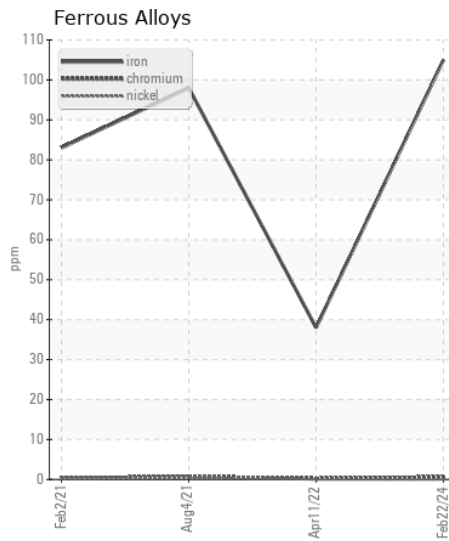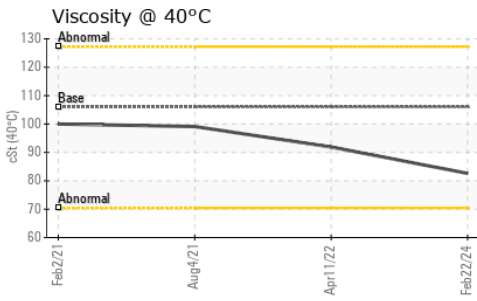

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : PCA0116115
Lab Number : 06100482
Unique Number : 10898712
Test Package : FLEET

Received : 26 Feb 2024
Tested : 27 Feb 2024
Diagnosed : 27 Feb 2024 - Wes Davis

NW WHITE & CO - SPECIAL SERVICE DIVISION
 100 INDEPENDENCE BLVD
 COLUMBIA, SC
 US 29210
 Contact: George Edwards
 gedwards@nwwhite.com

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T:
F: