



OIL ANALYSIS REPORT

WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL

Area  
**TPR-Houston Port**  
 Machine Id  
**6354 6354**  
 Component  
**Rear Right Wheel Hub**  
 Fluid  
**CHEVRON 1000 THF (--- GAL)**

**RECOMMENDATION**

Resample at the next service interval to monitor. Please specify the component make and model with your next sample.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		<b>DJJ0023561</b>	DJJ0023556	DJJ0018947
Sample Date		Client Info		<b>19 Feb 2024</b>	18 Feb 2024	13 Nov 2023
Machine Age	hrs	Client Info		<b>17614</b>	17614	16443
Oil Age	hrs	Client Info		<b>1000</b>	1000	0
Filter Age	hrs	Client Info		<b>1000</b>	1000	0
Oil Changed		Client Info		<b>Changed</b>	Changed	N/A
Filter Changed		Client Info		<b>Changed</b>	Changed	N/A
Sample Status				<b>NORMAL</b>	NORMAL	NORMAL

**WEAR**

All component wear rates are normal.

Iron	ppm	ASTM D5185m	>500	<b>24</b>	25	25
Chromium	ppm	ASTM D5185m	>8	<b>&lt;1</b>	<1	0
Nickel	ppm	ASTM D5185m	>5	<b>0</b>	0	0
Titanium	ppm	ASTM D5185m		<b>0</b>	0	0
Silver	ppm	ASTM D5185m		<b>0</b>	0	0
Aluminum	ppm	ASTM D5185m	>5	<b>&lt;1</b>	<1	0
Lead	ppm	ASTM D5185m	>5	<b>&lt;1</b>	<1	0
Copper	ppm	ASTM D5185m	>50	<b>0</b>	0	1
Tin	ppm	ASTM D5185m		<b>0</b>	0	0
Vanadium	ppm	ASTM D5185m		<b>&lt;1</b>	<1	0
White Metal	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE

**CONTAMINATION**










There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185m	>25	<b>6</b>	6	7
Potassium	ppm	ASTM D5185m	>20	<b>0</b>	0	0
Water		WC Method	>0.2	<b>NEG</b>	NEG	NEG
Silt	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Debris	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Appearance	scalar	*Visual	NORML	<b>NORML</b>	NORML	NORML
Odor	scalar	*Visual	NORML	<b>NORML</b>	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	<b>NEG</b>	NEG	NEG

**FLUID CONDITION**

The condition of the oil is acceptable for the time in service.

Sodium	ppm	ASTM D5185m		<b>1</b>	1	<1
Boron	ppm	ASTM D5185m	10	<b>11</b>	11	26
Barium	ppm	ASTM D5185m		<b>0</b>	0	0
Molybdenum	ppm	ASTM D5185m		<b>4</b>	5	9
Manganese	ppm	ASTM D5185m		<b>&lt;1</b>	<1	0
Magnesium	ppm	ASTM D5185m	20	<b>23</b>	23	51
Calcium	ppm	ASTM D5185m	3200	<b>2540</b>	2584	2451
Phosphorus	ppm	ASTM D5185m	1100	<b>973</b>	981	937
Zinc	ppm	ASTM D5185m	1400	<b>1113</b>	1123	1095
Sulfur	ppm	ASTM D5185m	3600	<b>3208</b>	3256	3535
Visc @ 40°C	cSt	ASTM D445	58.4	<b>52.4</b>	52.6	54.5

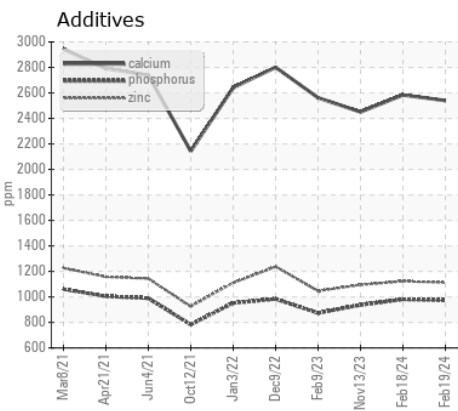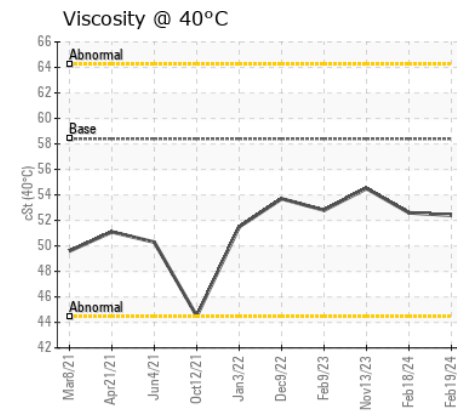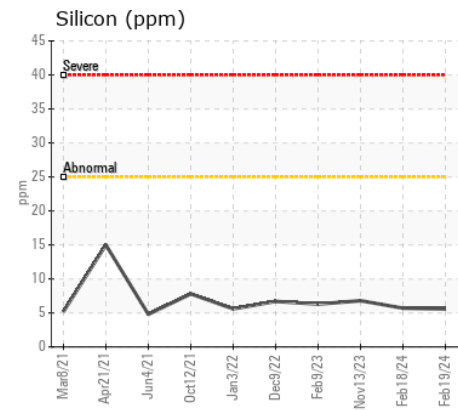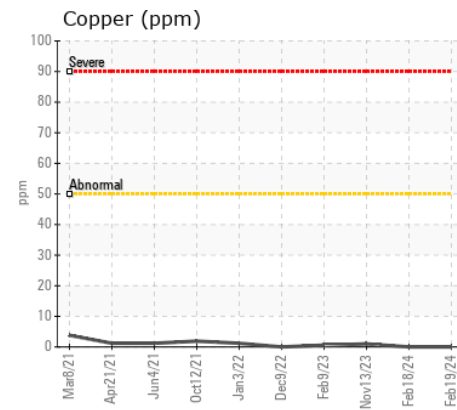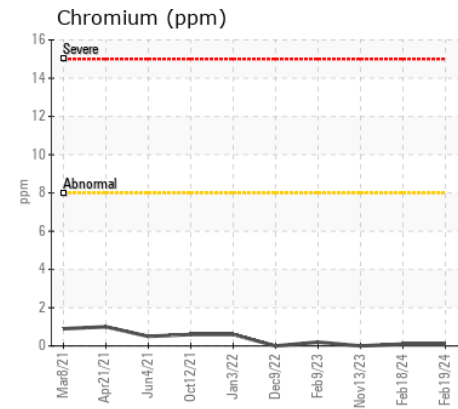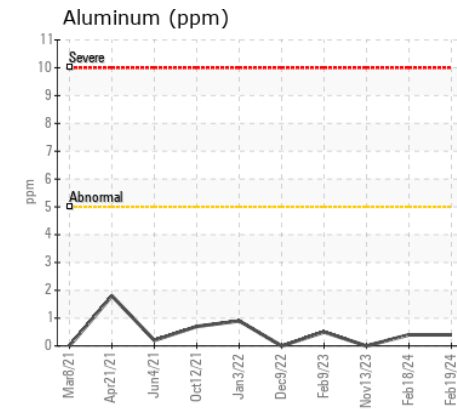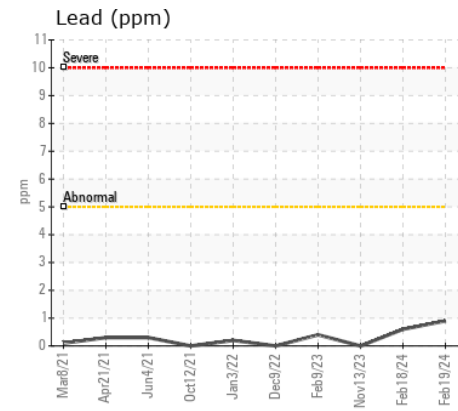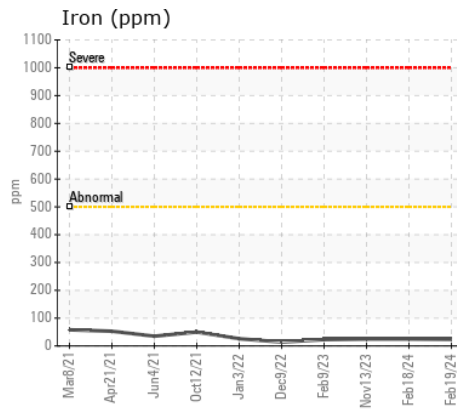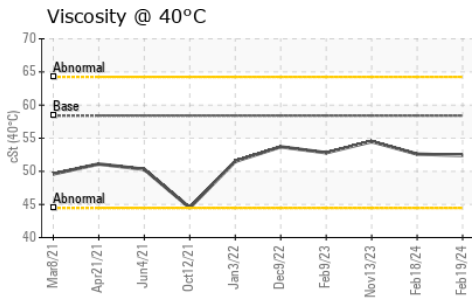

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : DJJ0023561  
**Lab Number** : 06100524  
**Unique Number** : 10898754  
**Test Package** : MOBCE  
**Received** : 26 Feb 2024  
**Tested** : 27 Feb 2024  
**Diagnosed** : 27 Feb 2024 - Wes Davis

**TEXAS PORT RECYCLING - HOUSTON PORT**  
 8945 MANCHESTER ST  
 HOUSTON, TX  
 US 77012  
 Contact: Dale Shaw  
 dale.shaw@tmrecycling.com  
 T:  
 F: (713)921-5545

Certificate L2367  
 To discuss this sample report, contact Customer Service at 1-800-237-1369.  
 \* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.  
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)