



McCLUNG-LOGAN
EQUIPMENT COMPANY, INC.

OIL ANALYSIS REPORT

WEAR	ABNORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	ATTENTION



Area
[W02008034]
Machine Id
VOLVO A25G 752865
Component
Diesel Engine
Fluid
MOBIL 15W40 (11 GAL)

RECOMMENDATION

Oil and filter change at the time of sampling has been noted. No corrective action is recommended at this time. Resample at the next service interval to monitor. (Customer Sample Comment: W02008034 1st 1000 hour service)

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		ML0886256	VCP420826	---
Sample Date		Client Info		23 Feb 2024	31 Oct 2023	---
Machine Age	hrs	Client Info		970	550	---
Oil Age	hrs	Client Info		500	500	---
Filter Age	hrs	Client Info		500	0	---
Oil Changed		Client Info		Changed	Changed	---
Filter Changed		Client Info		Changed	Changed	---
Sample Status				ABNORMAL	ABNORMAL	---

WEAR

The copper level has decreased, but is still abnormal. All other component wear rates are normal.

Iron	ppm	ASTM D5185m	>200	6	21	---
Chromium	ppm	ASTM D5185m	>20	<1	<1	---
Nickel	ppm	ASTM D5185m	>10	<1	<1	---
Titanium	ppm	ASTM D5185m		0	<1	---
Silver	ppm	ASTM D5185m	>2	0	1	---
Aluminum	ppm	ASTM D5185m	>30	3	2	---
Lead	ppm	ASTM D5185m	>40	2	4	---
Copper	ppm	ASTM D5185m	>20	▲ 44	▲ 274	---
Tin	ppm	ASTM D5185m	>20	<1	2	---
Vanadium	ppm	ASTM D5185m		<1	<1	---
White Metal	scalar	*Visual	NONE	NONE	NONE	---
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	---

CONTAMINATION













There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185m	>20	9	35	---
Potassium	ppm	ASTM D5185m	>20	2	<1	---
Fuel	%	ASTM D3524	>3.0	<1.0	0.5	---
Water		WC Method	>0.2	NEG	NEG	---
Glycol		WC Method		NEG	NEG	---
Soot %	%	*ASTM D7844	>3	0.2	0.2	---
Nitration	Abs/cm	*ASTM D7624	>20	7.5	9.3	---
Sulfation	Abs/.1mm	*ASTM D7415	>30	22.9	19.1	---
Silt	scalar	*Visual	NONE	NONE	NONE	---
Debris	scalar	*Visual	NONE	NONE	NONE	---
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	---
Appearance	scalar	*Visual	NORML	NORML	NORML	---
Odor	scalar	*Visual	NORML	NORML	NORML	---
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG	---

FLUID CONDITION

The oil viscosity is lower than normal. The BN result indicates that there is suitable alkalinity remaining in the oil. Confirm oil type.

Sodium	ppm	ASTM D5185m	>118	2	3	---
Boron	ppm	ASTM D5185m		356	65	---
Barium	ppm	ASTM D5185m		0	<1	---
Molybdenum	ppm	ASTM D5185m		123	88	---
Manganese	ppm	ASTM D5185m		1	5	---
Magnesium	ppm	ASTM D5185m		597	40	---
Calcium	ppm	ASTM D5185m		1729	2107	---
Phosphorus	ppm	ASTM D5185m		842	983	---
Zinc	ppm	ASTM D5185m		987	1260	---
Sulfur	ppm	ASTM D5185m		2755	3975	---
Oxidation	Abs/.1mm	*ASTM D7414	>25	16.1	14.8	---
Base Number (BN)	mg KOH/g	ASTM D2896		7.6	6.0	---
Visc @ 100°C	cSt	ASTM D445		● 12.2	● 11.1	---

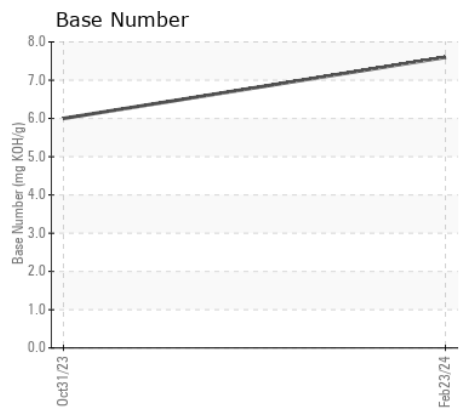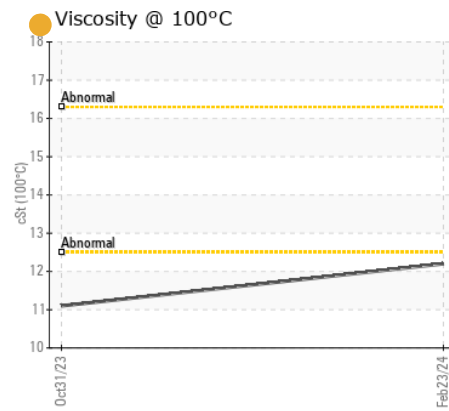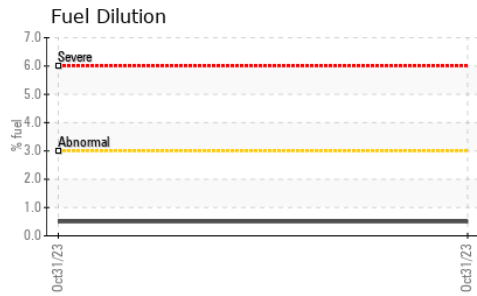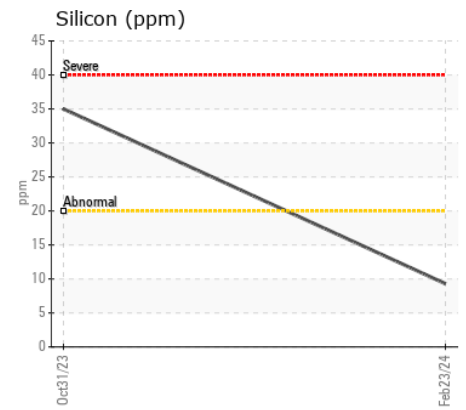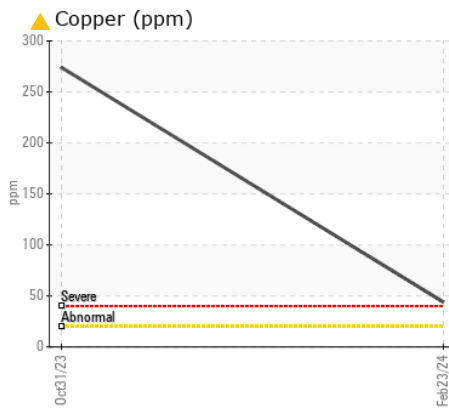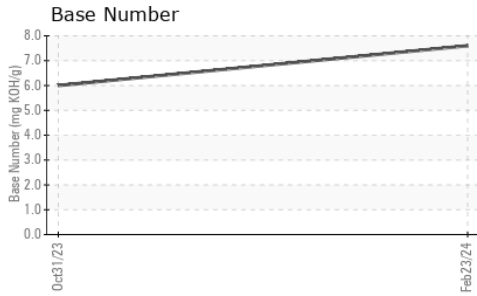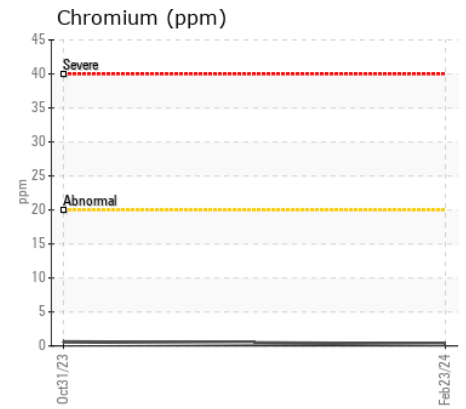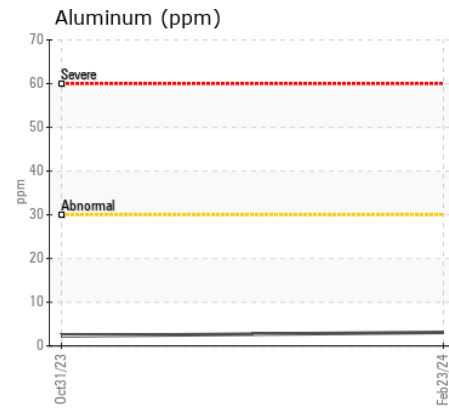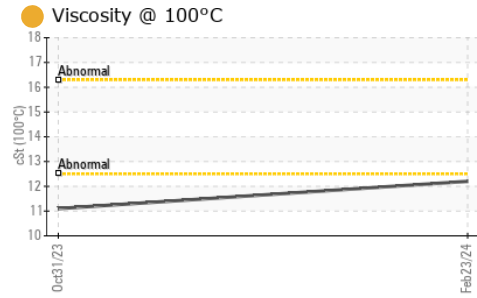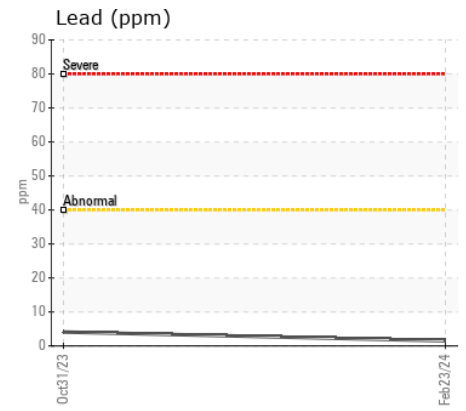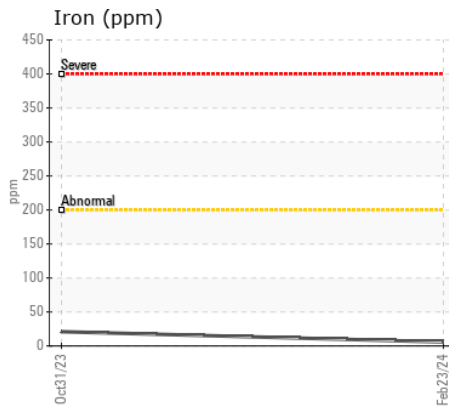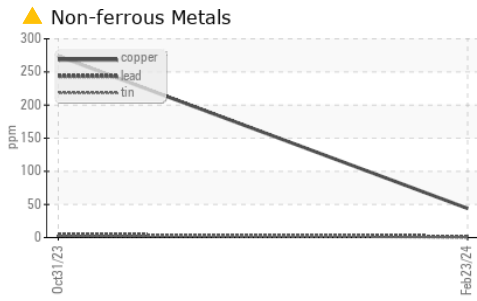

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : ML0886256 **Received** : 26 Feb 2024
Lab Number : 06100731 **Tested** : 28 Feb 2024
Unique Number : 10898961 **Diagnosed** : 28 Feb 2024 - Don Baldrige
Test Package : MOBCE (Additional Tests: FuelDilution, PercentFuel, TBN)

MCCLLUNG-LOGAN EQUIPMENT CO - MANASSAS
 8450 QUARRY ROAD
 MANASSAS, VA
 US 20110
 Contact: MIKE MAYHUGH
 MMAYHUGH@MCCLLUNG-LOGAN.COM
 T: (703)393-7344
 F: (703)393-7844

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)