

Machine Id **1682** Component **Diesel Engine** Fluid **DIESEL ENGINE OIL SAE 5W40 (--- QTS)**

RECOMMENDATION

We recommend that you drain the oil from the component if this has not already been done. We recommend an early resample to monitor this condition. Please specify the component make and model with your next sample.

WEAR

All component wear rates are normal.


CONTAMINATION

There is a moderate amount of fuel present in the oil. Tests confirm the presence of fuel in the oil.

FLUID CONDITION

The BN result indicates that there is suitable alkalinity remaining in the oil. Fuel is present in the oil and is lowering the viscosity. The oil is no longer serviceable due to the presence of contaminants.

				~~~~		
Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		WC0870844	WC0870702	WC0773040
Sample Date		Client Info		24 Jan 2024	16 Nov 2023	02 Feb 2023
Machine Age	mls	Client Info		204237	0	174335
Oil Age	mls	Client Info		0	0	0
Filter Age	mls	Client Info		0	0	0
Oil Changed		Client Info		Not Changd	Not Changd	Not Changd
Filter Changed		Client Info		Not Changd	Not Changd	Not Change
Sample Status				ABNORMAL	MARGINAL	ABNORMAL
Iron	ppm	ASTM D5185m	>100	6	6	20
Chromium	ppm	ASTM D5185m	>20	<1	<1	<1
Nickel	ppm	ASTM D5185m	>4	0	0	0
Titanium	ppm	ASTM D5185m		0	0	<1
Silver	ppm	ASTM D5185m	>3	0	0	0
Aluminum	ppm	ASTM D5185m	>20	5	3	6
Lead	ppm	ASTM D5185m	>40	1	0	0
Copper	ppm	ASTM D5185m	>330	<1	<1	<1
Tin	ppm	ASTM D5185m	>15	0	0	<1
Vanadium	ppm	ASTM D5185m		<1	<1	0
White Metal	scalar	*Visual	NONE	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	NONE
0''''''''''''''''''''''''''''''''''''''					4	
Silicon	ppm	ASTM D5185m	>25	4	4	5
Potassium	ppm	ASTM D5185m	>20	2	<1	2
Fuel	%	ASTM D3524	>5	A 7.2	▲ 3.3	▲ 6.4
Water		WC Method	>0.2	NEG	NEG	NEG
Glycol	0/	WC Method	0	NEG	NEG	NEG
Soot % Nitration	%	*ASTM D7844 *ASTM D7624	>3	0.6 10.8	0.3 9.3	0.3
Sulfation	Abs/cm Abs/.1mm	*ASTM D7624	>20 >30	22.1	9.3 18.7	20.6
				NONE		20.6 NONE
Silt Debris	scalar	*Visual *Visual	NONE	NONE	NONE	NONE
Sand/Dirt	scalar		NONE	NONE	NONE	
	scalar scalar	*Visual *Visual	NORML	NORE	NORML	NONE
Appearance Odor	scalar	*Visual	NORML	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NORML	NEG	NEG
	Scala	visual	20.2		NLG	NLG
Sodium	ppm	ASTM D5185m	>44	3	2	3
Boron	ppm	ASTM D5185m	250	25	33	21
Barium	ppm	ASTM D5185m	10	0	0	0
Molybdenum	ppm	ASTM D5185m	100	81	82	68
Manganese	ppm	ASTM D5185m		<1	0	1
Magnesium	ppm	ASTM D5185m	450	128	123	47
Calcium	ppm	ASTM D5185m	3000	1966	1986	1941
Phosphorus	ppm	ASTM D5185m	1150	979	1006	877
Zinc	ppm	ASTM D5185m	1350	1190	1183	1102
Sulfur	ppm	ASTM D5185m	4250	3267	3474	3420
Oxidation	Abs/.1mm	*ASTM D7414	>25	19.1	14.9	19.0
Base Number (BN)	mg KOH/g	ASTM D2896	8.5	5.3	6.6	7.1
	cSt	ASTM D445	14.4		13.0	12.4

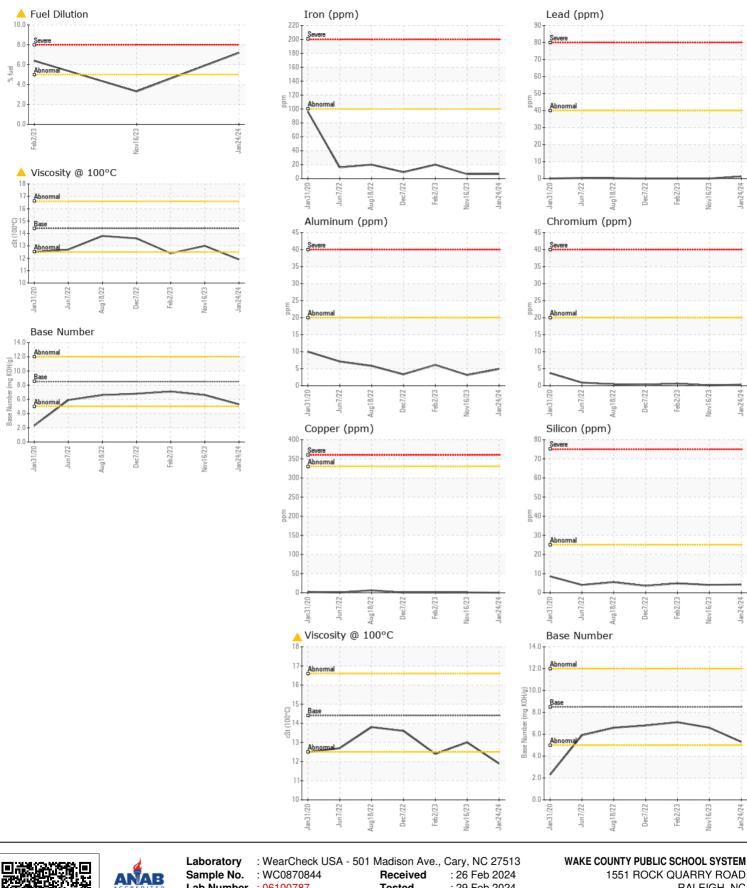

1551 ROCK QUARRY ROAD Lab Number : 06100787 : 29 Feb 2024 RALEIGH, NC Tested Unique Number : 10899017 : 29 Feb 2024 - Wes Davis US 27610 Diagnosed Test Package : MOB 1 (Additional Tests: FuelDilution, PercentFuel, TBN) Contact: DEVIN WEBER Certificate L2367 To discuss this sample report, contact Customer Service at 1-800-237-1369. dweber@wcpss.net * - Denotes test methods that are outside of the ISO 17025 scope of accreditation. T: (919)856-8076 F: x: Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

F

Contact/Location: DEVIN WEBER - WCPRAL

Vov16/23

/16/23

Vov16/23

Nov16/23 -

Jan24/24 -

an24/24

lan24/24