


**WEAR** CONTAMINATION **FLUID CONDITION**  **NORMAL NORMAL NORMAL** 

Machine Id

1760

Component

Component Diesel Engine							
DIESEL ENGINE OIL SAE 15W40 ( QTS)							
	T1		NA-AlI	Line it / A leas		L Batan A	Lists - O
RECOMMENDATION	Test	UOM	Method	Limit/Abn	Current	History1	History2
Resample at the next service interval to monitor. Please specify the component make and model with your next sample.	Sample Number Sample Date		Client Info		WC0870826 24 Jan 2024		WC0706329
		mlo	Client Info			16 Mar 2023 34133	12 Jul 2022 20227
	Machine Age	mls	Client Info		49597		
	Oil Age	mls	Client Info		0	0	0
	Filter Age	mls	Client Info		0 Nat Ohan ad	0 Not Change	0 Not Chanad
	Oil Changed		Client Info		Not Changd	Not Change	Not Changd
	Filter Changed Sample Status		Client into		Not Changd NORMAL	Not Changd NORMAL	Not Changd NORMAL
WEAR							
WEAR	Iron	ppm	ASTM D5185m		2	22	37
Metal levels are typical for a new component breaking in.	Chromium	ppm	ASTM D5185m		<1	1	1
	Nickel	ppm	ASTM D5185m	>4	0	<1	<1
	Titanium	ppm	ASTM D5185m		0	0	0
	Silver	ppm	ASTM D5185m		0	0	0
	Aluminum	ppm	ASTM D5185m		11	12	26
	Lead	ppm	ASTM D5185m		1	2	<1
	Copper	ppm	ASTM D5185m		<1	1	6
	Tin	ppm	ASTM D5185m	>15	0	<1	1
	Vanadium	ppm	ASTM D5185m		<1	0	<1
	White Metal	scalar	*Visual	NONE	NONE	NONE	NONE
	Yellow Metal	scalar	*Visual	NONE	NONE	NONE	NONE
CONTAMINATION	Silicon	ppm	ASTM D5185m	>25	4	6	14
	Potassium	ppm	ASTM D5185m		13	21	70
Elevated aluminum (Al) and/or lead (Pb) and potassium (K) levels in your metals analysis are likely a result of solder flux release into the lubricant and is common on new equipment/components. There is no indication of any contamination in the oil.	Fuel	1-1-	WC Method		<1.0	<1.0	<1.0
	Water		WC Method	>0.2	NEG	NEG	NEG
	Glycol		WC Method		NEG	NEG	NEG
	Soot %	%	*ASTM D7844	>3	0.3	0.5	0.2
	Nitration	Abs/cm	*ASTM D7624	>20	9.4	10.5	10.4
	Sulfation	Abs/.1mm	*ASTM D7415	>30	18.4	20.7	20.5
	Silt	scalar	*Visual	NONE	NONE	NONE	NONE
	Debris	scalar	*Visual	NONE	NONE	NONE	NONE
	Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	NONE
	Appearance	scalar	*Visual	NORML	NORML	NORML	NORML
	Odor	scalar	*Visual	NORML	NORML	NORML	NORML
	<b>Emulsified Water</b>	scalar	*Visual	>0.2	NEG	NEG	NEG
FLUID CONDITION	Sodium	ppm	ASTM D5185m	\15Q	2	2	3
TEOID CONDITION	Boron	ppm	ASTM D5185m		47	45	30
The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.	Barium	ppm	ASTM D5185m		0	2	0
	Molybdenum	ppm	ASTM D5185m		84	91	79
	Manganese	ppm	ASTM D5185m	100	<1	<1	<1
	Magnesium	ppm	ASTM D5185m	450	119	77	30
	Calcium	ppm	ASTM D5185m		2051	2194	1839
	Phosphorus	ppm	ASTM D5185m		1076	1047	756
	Zinc	ppm	ASTM D5185m		1262	1237	952
	Sulfur	ppm	ASTM D5185m		3612	3954	2946
	Oxidation	Abs/.1mm	*ASTM D7414		14.1	16.3	15.2
	Base Number (BN)				6.5	6.6	7.2
	Visc @ 100°C	cSt	ASTM D445		12.8	13.4	13.4
		•		-			

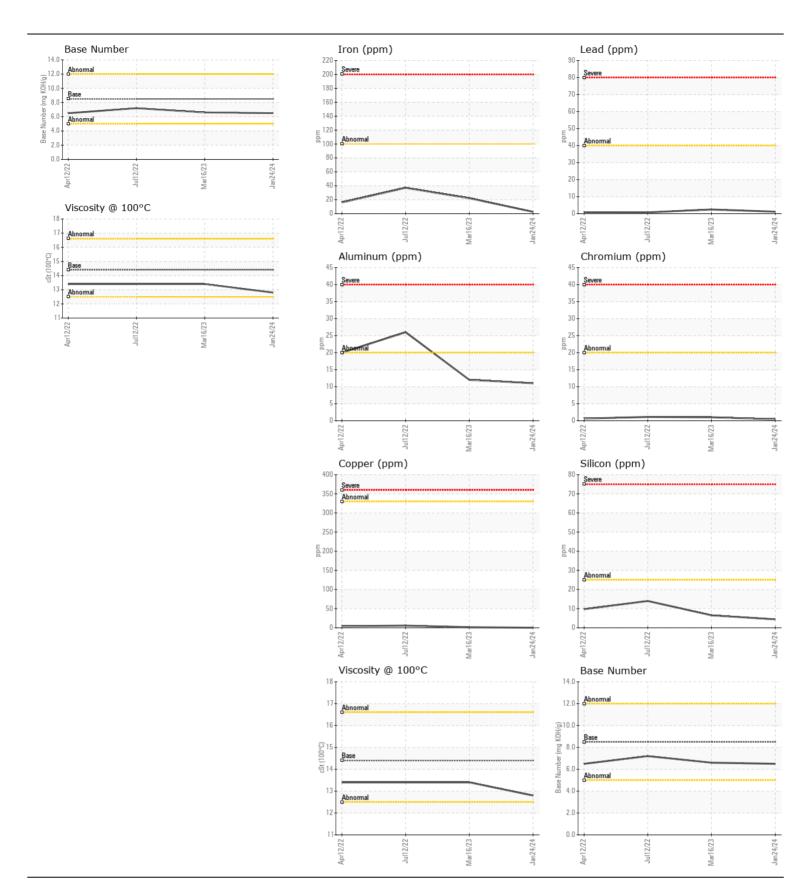



Certificate L2367

Laboratory Sample No.

: WC0870826

Lab Number : 06100791 Unique Number : 10899021

Test Package : MOB 1 ( Additional Tests: TBN )

: WearCheck USA - 501 Madison Ave., Cary, NC 27513 Received : 26 Feb 2024 : 27 Feb 2024 **Tested** 

Diagnosed

: 27 Feb 2024 - Wes Davis

WAKE COUNTY PUBLIC SCHOOL SYSTEM 1551 ROCK QUARRY ROAD RALEIGH, NC

US 27610 Contact: DEVIN WEBER dweber@wcpss.net

T: (919)856-8076

To discuss this sample report, contact Customer Service at 1-800-237-1369. \* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

F: x: