WEAR CONTAMINATION FLUID CONDITION


NORMAL SEVERE ATTENTION

Machine Id

1259

Component **Diesel Engine**

Diesel Engine							
DIESEL ENGINE OIL SAE 15W40 (QTS)							
RECOMMENDATION	Test	UOM	Method	Limit/Abn	Current	History1	History2
We advise that you check for the source of the coolant leak. We recommend that you drain the oil from the component if this has not already been done. We advise that you flush the component thoroughly before re-filling with oil. We recommend an early resample to monitor this condition. Please specify the component make and model with your next sample.	Sample Number		Client Info		WC0870738	WC0761301	
	Sample Date		Client Info		30 Jan 2024	23 Nov 2022	
	Machine Age	mls	Client Info		204298	184183	
	Oil Age	mls	Client Info		0	0	
	Filter Age	mls	Client Info		0	0	
	Oil Changed		Client Info		Not Changd	Not Changd	
	Filter Changed		Client Info		Not Changd	Not Changd	
	Sample Status				SEVERE	NORMAL	
WEAR	Iron	ppm	ASTM D5185m	>100	49	23	
	Chromium	ppm	ASTM D5185m	>20	2	1	
All component wear rates are normal.	Nickel	ppm	ASTM D5185m	>4	0	<1	
	Titanium	ppm	ASTM D5185m		0	0	
	Silver	ppm	ASTM D5185m	>3	0	0	
	Aluminum	ppm	ASTM D5185m	>20	6	3	
	Lead	ppm	ASTM D5185m	>40	1	<1	
	Copper	ppm	ASTM D5185m	>330	3	3	
	Tin	ppm	ASTM D5185m	>15	0	<1	
	Vanadium	ppm	ASTM D5185m		<1	0	
	White Metal	scalar	*Visual	NONE	NONE	NONE	
	Yellow Metal	scalar	*Visual	NONE	NONE	NONE	
CONTAMINATION	Silicon	nnm	ASTM D5185m	>25	7	5	
	Potassium	ppm	ASTM D5185m		, <u>^</u> 208	0	
Test for glycol is positive. There is a high concentration of glycol present in the oil.	Fuel	ррпп	WC Method		<1.0	<1.0	
	Water		WC Method		NEG	NEG	
	Glycol	%	*ASTM D2982	7 U.L	▲ 0.10	NEG	
	Soot %	%	*ASTM D7844	>3	0.6	0.3	
	Nitration	Abs/cm		>20	9.8	9.3	
	Sulfation	Abs/.1mm	*ASTM D7415	>30	19.2	18.2	
	Silt	scalar	*Visual	NONE	NONE	NONE	
	Debris	scalar	*Visual	NONE	NONE	NONE	
	Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	
	Appearance	scalar	*Visual	NORML	NORML	NORML	
	Odor	scalar	*Visual	NORML	NORML	NORML	
	Emulsified Water	scalar	*Visual	>0.2	NEG	NEG	
FLUID CONDITION	Sodium	nnm	ASTM D5185m	\1E0	<u> </u>	2	
T LOID CONDITION	Boron	ppm ppm	ASTM D5185m		40	44	
The BN result indicates that there is suitable alkalinity remaining in the oil. The oil is no longer serviceable due to the presence of contaminants.	Barium	ppm	ASTM D5185m		0	0	
	Molybdenum	ppm	ASTM D5185m		98	76	
	Manganese	ppm	ASTM D5185m	100	<1	<1	
	Magnesium	ppm	ASTM D5185m	450	177	44	
	Calcium	ppm	ASTM D5185m		2059	2032	
	Phosphorus	ppm	ASTM D5185m		1078	939	
	Zinc	ppm	ASTM D5185m		1299	1162	
	Sulfur	ppm	ASTM D5185m	4250	3661	3815	
	Oxidation	Abs/.1mm	*ASTM D7414		14.3	13.3	
	Base Number (BN)	mg KOH/g	ASTM D2896	8.5	7.6	7.4	
	Visc @ 100°C	cSt	ASTM D445	14.4	13.7	14.0	

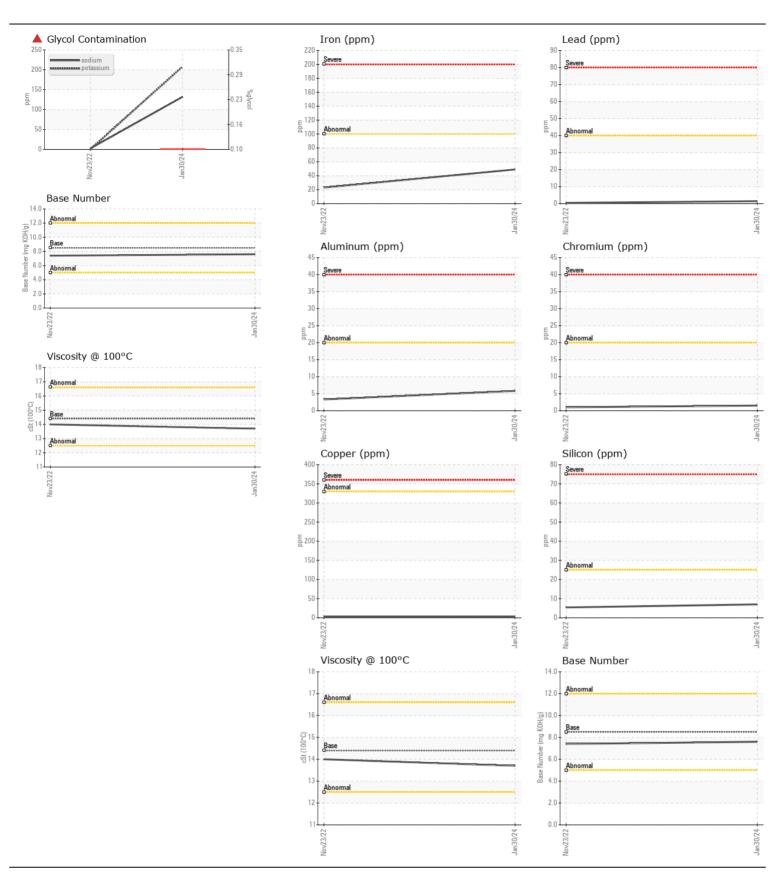



Laboratory Sample No. Lab Number : 06100810 Unique Number : 10899040

: WearCheck USA - 501 Madison Ave., Cary, NC 27513 : WC0870738

Received **Tested**

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

Diagnosed Test Package: MOB 1 (Additional Tests: Glycol, TBN)

: 26 Feb 2024 : 28 Feb 2024

: 28 Feb 2024 - Wes Davis

1551 ROCK QUARRY ROAD RALEIGH, NC US 27610

WAKE COUNTY PUBLIC SCHOOL SYSTEM

Contact: DEVIN WEBER dweber@wcpss.net

To discuss this sample report, contact Customer Service at 1-800-237-1369. * - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

T: (919)856-8076 F: x: