

#### Machine Id **1612** Component **Diesel Engine** Fluid **DIESEL ENGINE OIL SAE 15W40 (--- QTS)**

# RECOMMENDATION

We advise that you check the fuel injection system. We recommend that you drain the oil from the component if this has not already been done. We recommend an early resample to monitor this condition. Please specify the component make and model with your next sample.

### WEAR

All component wear rates are normal.


# CONTAMINATION

There is a high amount of fuel present in the oil. Tests confirm the presence of fuel in the oil.

## FLUID CONDITION

The BN result indicates that there is suitable alkalinity remaining in the oil. Fuel is present in the oil and is lowering the viscosity. The oil is no longer serviceable due to the presence of contaminants.

				$\frown$		
Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		WC0870838	WC0870750	WC0806531
Sample Date		Client Info		19 Jan 2024	06 Nov 2023	16 May 2023
Machine Age	mls	Client Info		204132	199340	0
Oil Age	mls	Client Info		0	0	0
Filter Age	mls	Client Info		0	0	0
Oil Changed		Client Info		Not Changd	Not Changd	Not Changd
Filter Changed		Client Info		Not Changd	Not Changd	Not Changd
Sample Status				SEVERE	SEVERE	SEVERE
			100	<u>0</u> 4	00	4 17
Iron	ppm	ASTM D5185m ASTM D5185m	>100	21 1	20 1	15
Chromium	ppm		>20	-		
Nickel	ppm	ASTM D5185m	>4	0	0	0
Titanium	ppm	ASTM D5185m	0	0	<1	0
Silver	ppm	ASTM D5185m	>3	0	0	0
Lead	ppm	ASTM D5185m ASTM D5185m	>20 >40	6 0		0
	ppm	ASTM D5185m ASTM D5185m	>40	0 <1	0	<1
Copper Tin	ppm	ASTM D5185m	>330	<1 0	<1 0	< 1
Vanadium	ppm	ASTM D5185m	210	0	0	0
White Metal	ppm scalar	*Visual	NONE	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	NONE
	Scalai	visual	NONE	NONE	NONE	NONE
Silicon	ppm	ASTM D5185m	>25	4	5	4
Potassium	ppm	ASTM D5185m	>20	0	3	6
Fuel	%	ASTM D3524	>5	<b>16.1</b>	<b>9</b> .6	<b>1</b> 8.6
Water		WC Method	>0.2	NEG	NEG	NEG
Glycol		WC Method		NEG	NEG	NEG
Soot %	%	*ASTM D7844	>3	1.1	0.6	0.9
Nitration	Abs/cm	*ASTM D7624	>20	12.0	10.4	11.4
Sulfation	Abs/.1mm	*ASTM D7415	>30	22.4	19.7	20.8
Silt	scalar	*Visual	NONE	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG	NEG
Sodium	ppm	ASTM D5185m	>158	0	1	4
Boron	ppm	ASTM D5185m	250	11	25	24
Barium	ppm	ASTM D5185m	10	0	6	0
Molybdenum	ppm	ASTM D5185m	100	61	74	69
Manganese					0	<1
Manyanese	ppm	ASTM D5185m		<1	0	
Magnesium		ASTM D5185m ASTM D5185m	450	<1 140	0 162	105
•	ppm		450 3000			
Magnesium	ppm ppm	ASTM D5185m		140	162	105
Magnesium Calcium	ppm ppm ppm	ASTM D5185m ASTM D5185m	3000	140 1508	162 1840	105 1825
Magnesium Calcium Phosphorus	ppm ppm ppm ppm	ASTM D5185m ASTM D5185m ASTM D5185m	3000 1150	140 1508 745	162 1840 909	105 1825 885
Magnesium Calcium Phosphorus Zinc	ppm ppm ppm ppm ppm	ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m	3000 1150 1350	140 1508 745 926	162 1840 909 1070	105 1825 885 1077
Magnesium Calcium Phosphorus Zinc Sulfur	ppm ppm ppm ppm ppm ppm	ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m	3000 1150 1350 4250	140 1508 745 926 2545	162 1840 909 1070 3603	105 1825 885 1077 3755

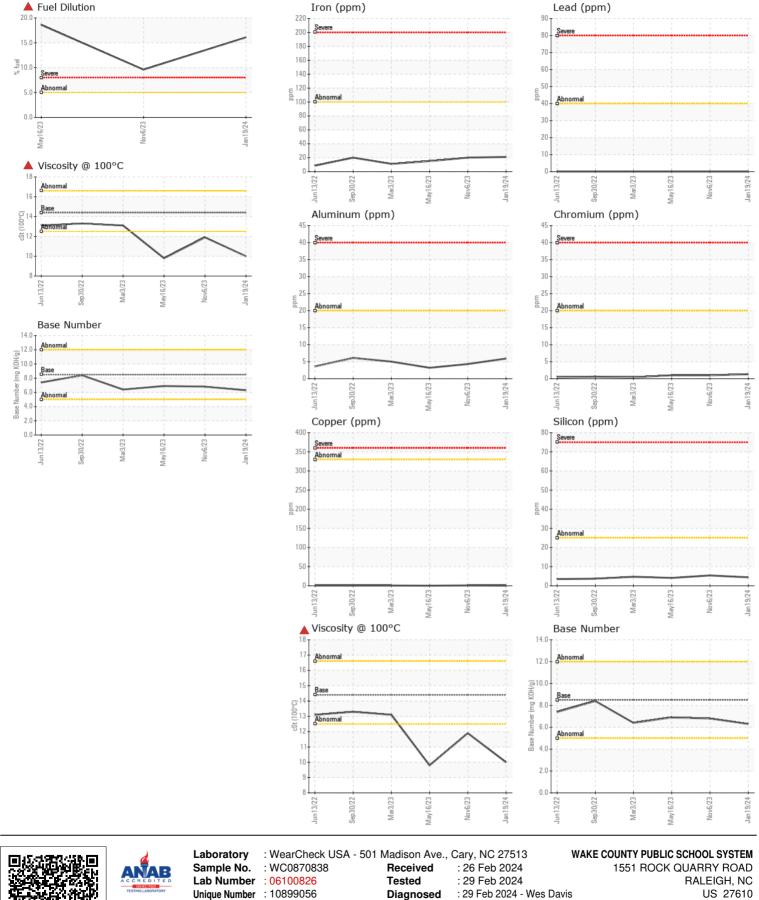

 Unique Number
 : 10899056
 Diagnosed
 : 29 Feb 2024 - Wes Davis

 Certificate 12367
 Test Package
 : MOB 1 (Additional Tests: PercentFuel, TBN )
 C

 To discuss this sample report, contact Customer Service at 1-800-237-1369.
 \* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

Contact/Location: DEVIN WEBER - WCPRAL

F: x:

Contact: DEVIN WEBER

dweber@wcpss.net

T: (919)856-8076