



WEAR	ABNORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL

Machine Id
6216298
Component
Diesel Engine
Fluid
{not provided} (--- GAL)

RECOMMENDATION

No corrective action is recommended at this time. Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		IL06100861	---	---
Sample Date		Client Info		16 Feb 2024	---	---
Machine Age	mls	Client Info		149534	---	---
Oil Age	mls	Client Info		0	---	---
Filter Age	mls	Client Info		0	---	---
Oil Changed		Client Info		N/A	---	---
Filter Changed		Client Info		N/A	---	---
Sample Status				ABNORMAL	---	---

WEAR

The aluminum level is abnormal. All other component wear rates are normal.

Iron	ppm	ASTM D5185m	>100	21	---	---
Chromium	ppm	ASTM D5185m	>20	2	---	---
Nickel	ppm	ASTM D5185m	>4	0	---	---
Titanium	ppm	ASTM D5185m		0	---	---
Silver	ppm	ASTM D5185m	>3	0	---	---
Aluminum	ppm	ASTM D5185m	>20	▲ 20	---	---
Lead	ppm	ASTM D5185m	>40	0	---	---
Copper	ppm	ASTM D5185m	>330	<1	---	---
Tin	ppm	ASTM D5185m	>15	0	---	---
Vanadium	ppm	ASTM D5185m		0	---	---
White Metal	scalar	*Visual	NONE	NONE	---	---
Yellow Metal	scalar	*Visual	NONE	NONE	---	---

CONTAMINATION

There is no indication of any contamination in the oil.


Silicon	ppm	ASTM D5185m	>25	6	---	---
Potassium	ppm	ASTM D5185m	>20	29	---	---
Fuel	%	ASTM D3524	>5	<1.0	---	---
Water		WC Method	>0.2	NEG	---	---
Glycol		WC Method		NEG	---	---
Soot %	%	*ASTM D7844	>3	0.4	---	---
Nitration	Abs/cm	*ASTM D7624	>20	8.5	---	---
Sulfation	Abs/.1mm	*ASTM D7415	>30	22.7	---	---
Silt	scalar	*Visual	NONE	NONE	---	---
Debris	scalar	*Visual	NONE	NONE	---	---
Sand/Dirt	scalar	*Visual	NONE	NONE	---	---
Appearance	scalar	*Visual	NORML	NORML	---	---
Odor	scalar	*Visual	NORML	NORML	---	---
Emulsified Water	scalar	*Visual	>0.2	NEG	---	---

FLUID CONDITION


The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is acceptable for the time in service.

Sodium	ppm	ASTM D5185m		0	---	---
Boron	ppm	ASTM D5185m		26	---	---
Barium	ppm	ASTM D5185m		0	---	---
Molybdenum	ppm	ASTM D5185m		45	---	---
Manganese	ppm	ASTM D5185m		<1	---	---
Magnesium	ppm	ASTM D5185m		484	---	---
Calcium	ppm	ASTM D5185m		1530	---	---
Phosphorus	ppm	ASTM D5185m		682	---	---
Zinc	ppm	ASTM D5185m		858	---	---
Sulfur	ppm	ASTM D5185m		2099	---	---
Oxidation	Abs/.1mm	*ASTM D7414	>25	21.7	---	---
Base Number (BN)	mg KOH/g	ASTM D2896		9.5	---	---
Visc @ 100°C	cSt	ASTM D445		10.7	---	---


▲ Aluminum (ppm)

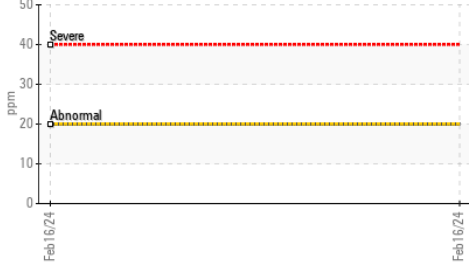


Ferrous Alloys

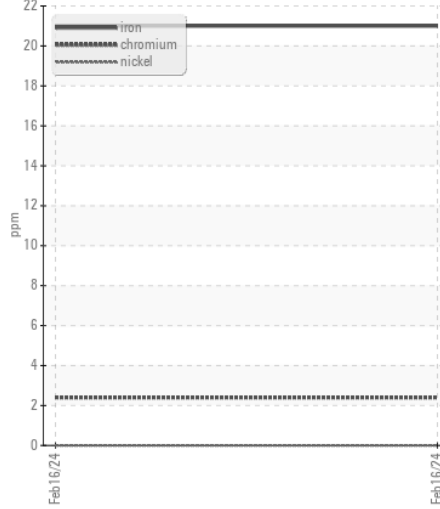


Base Number

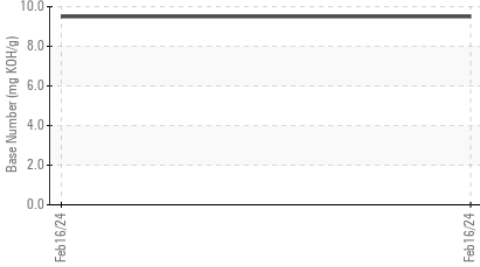


Non-ferrous Metals

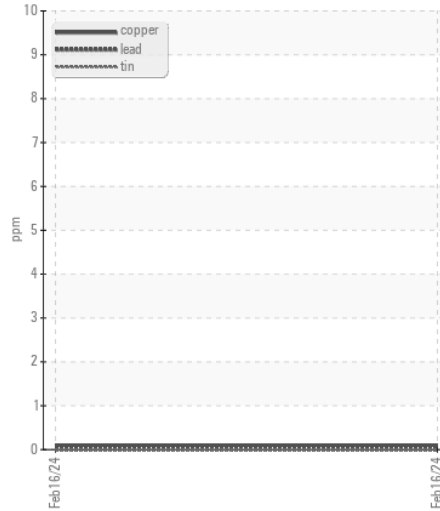


Viscosity @ 100°C

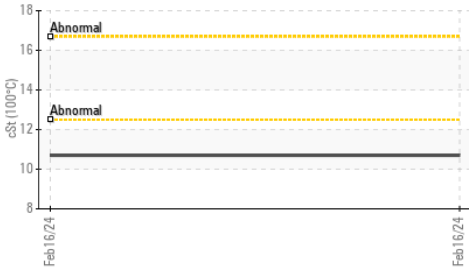

Viscosity @ 100°C

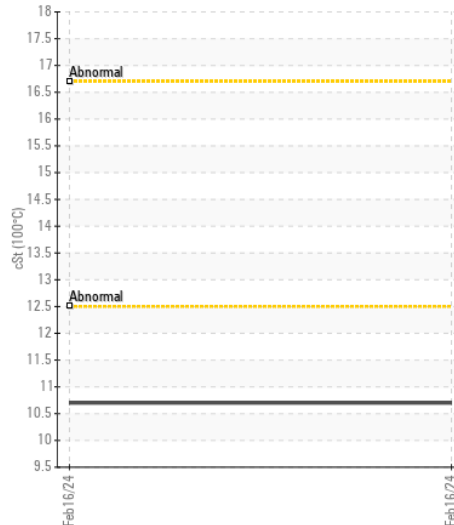

Base Number

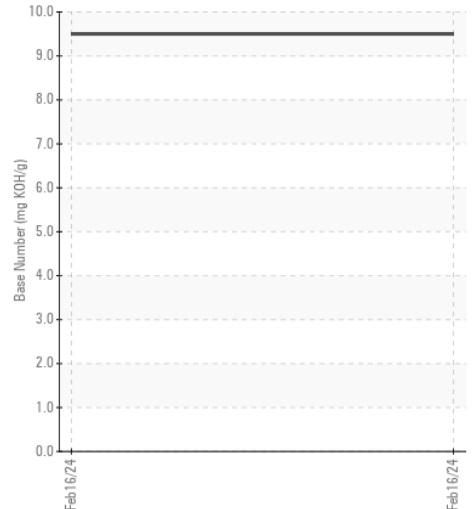

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513

Sample No. : IL06100861

Lab Number : 06100861

Unique Number : 10899091

Test Package : FLEET (Additional Tests: FuelDilution, PercentFuel)

Received : 26 Feb 2024

Tested : 28 Feb 2024

Diagnosed : 28 Feb 2024 - Sean Felton

IDEALRELEASE OF ATLANTA - FULTON

4675 BAKERS FERRY ROAD

ATLANTA, GA

US 30331

Contact: DAVID JOHNS

davidjohns@idealease.com

T: (404)699-5571

F: (404)699-7420

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)