



OIL ANALYSIS REPORT

WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL

Machine Id
KOMATSU WA600-6 6529 (S/N KMTWA097C26060135)

Component
Transmission

Fluid
TULCO LUBSOIL TO-4 30 (--- GAL)

RECOMMENDATION

Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		TO10003150	TO10002729	---
Sample Date		Client Info		20 Feb 2024	18 Oct 2023	---
Machine Age	hrs	Client Info		22323	21834	---
Oil Age	hrs	Client Info		568	79	---
Filter Age	hrs	Client Info		489	79	---
Oil Changed		Client Info		Changed	Changed	---
Filter Changed		Client Info		Changed	Changed	---
Sample Status				NORMAL	NORMAL	---

WEAR

All component wear rates are normal.

PQ	UOM	Method	Limit/Abn	Current	History1	History2
Iron	ppm	ASTM D5185m	>200	3	2	---
Chromium	ppm	ASTM D5185m	>10	<1	<1	---
Nickel	ppm	ASTM D5185m		0	0	---
Titanium	ppm	ASTM D5185m		0	0	---
Silver	ppm	ASTM D5185m		0	0	---
Aluminum	ppm	ASTM D5185m	>50	2	3	---
Lead	ppm	ASTM D5185m	>50	0	0	---
Copper	ppm	ASTM D5185m	>200	8	9	---
Tin	ppm	ASTM D5185m	>10	0	0	---
Vanadium	ppm	ASTM D5185m		0	0	---
White Metal	scalar	*Visual	NONE	NONE	NONE	---
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	---

CONTAMINATION













There is no indication of any contamination in the fluid.

Silicon	ppm	ASTM D5185m	>50	11	13	---
Potassium	ppm	ASTM D5185m	>20	2	0	---
Water		WC Method	>0.1	NEG	NEG	---
Silt	scalar	*Visual	NONE	NONE	NONE	---
Debris	scalar	*Visual	NONE	NONE	LIGHT	---
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	---
Appearance	scalar	*Visual	NORML	NORML	NORML	---
Odor	scalar	*Visual	NORML	NORML	NORML	---
Emulsified Water	scalar	*Visual	>0.1	NEG	NEG	---

FLUID CONDITION

The AN level is acceptable for this fluid. The condition of the fluid is suitable for further service.

Sodium	ppm	ASTM D5185m		0	1	---
Boron	ppm	ASTM D5185m		0	0	---
Barium	ppm	ASTM D5185m		8	0	---
Molybdenum	ppm	ASTM D5185m		0	0	---
Manganese	ppm	ASTM D5185m		0	<1	---
Magnesium	ppm	ASTM D5185m	9	17	21	---
Calcium	ppm	ASTM D5185m	4500	3010	3879	---
Phosphorus	ppm	ASTM D5185m	1150	749	759	---
Zinc	ppm	ASTM D5185m	1250	967	898	---
Sulfur	ppm	ASTM D5185m	4500	3682	3943	---
Acid Number (AN)	mg KOH/g	ASTM D8045	0.28	0.96	0.84	---
Visc @ 40°C	cSt	ASTM D445	108	104	102	---
Visc @ 100°C	cSt	ASTM D445	11.6	11.4	11.2	---
Viscosity Index (VI)	Scale	ASTM D2270	94	95	94	---

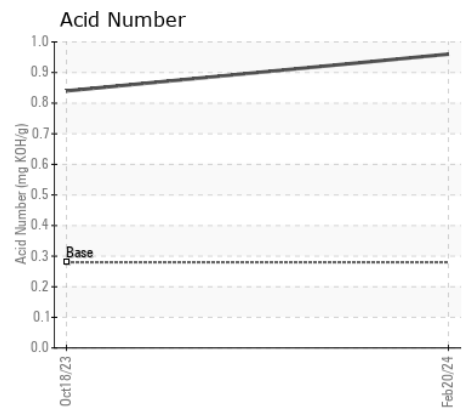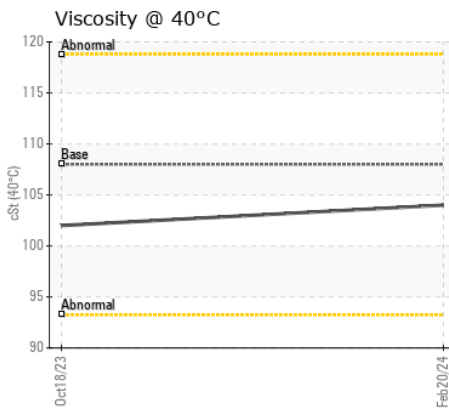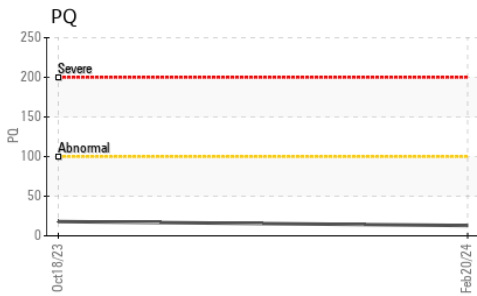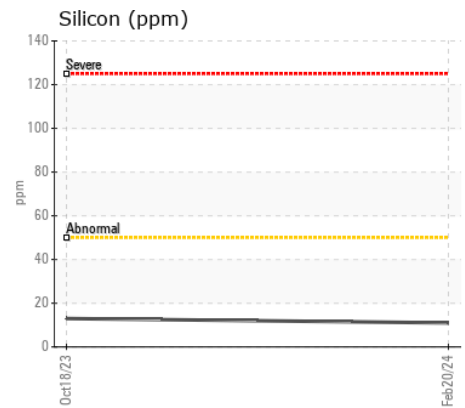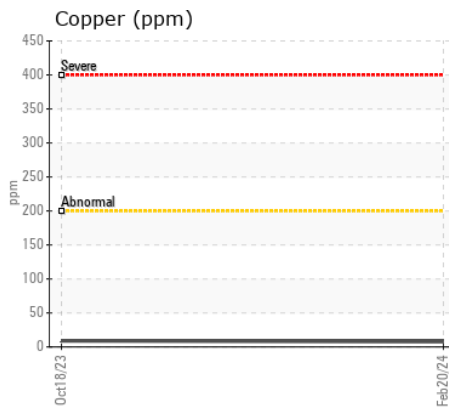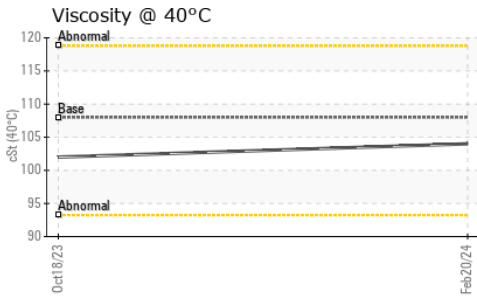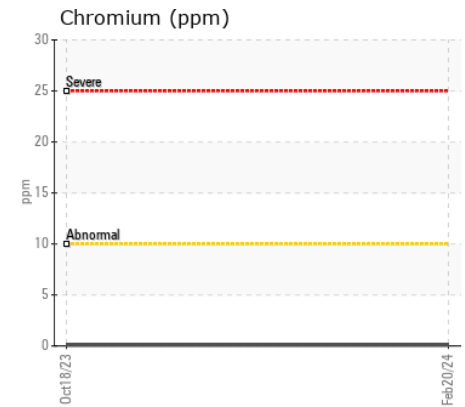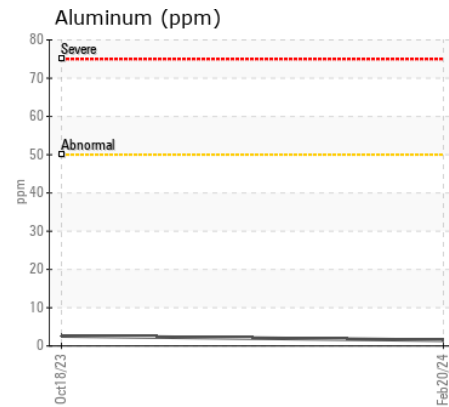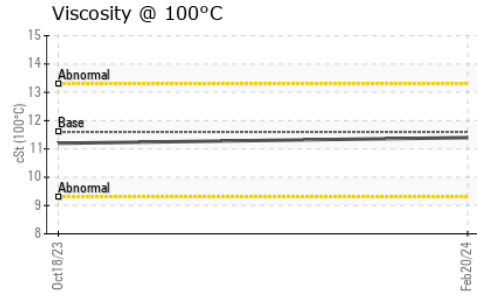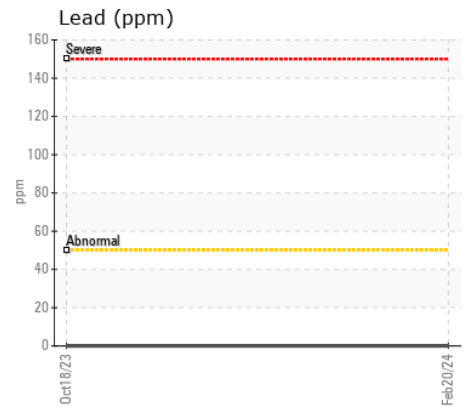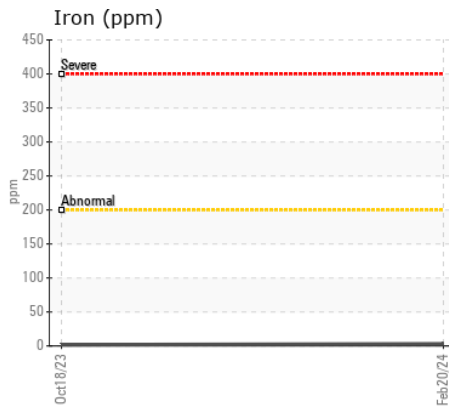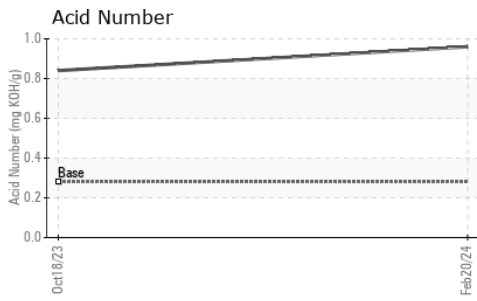

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513

Sample No. : TO10003150

Lab Number : 06101073

Unique Number : 10899303

Test Package : MOB 2 (Additional Tests: KV100, PQ, VI)

Received : 26 Feb 2024

Tested : 27 Feb 2024

Diagnosed : 27 Feb 2024 - Wes Davis

ANCHOR STONE TULSA ROCK

TULSA ROCK QUARRY, 66TH ST N 145TH AVENUE

TULSA, OK

US 74137

Contact: MIKE SNYDER

msnyder@anchorstoneco.com

T: (417)850-9635

F:

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)