



OIL ANALYSIS REPORT

WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL

Area
DE Samples - CAT LAB
 Machine Id
KOMATSU 605 HAUL TRUCK 6555 (S/N 10571)
 Component
Rear Right Final Drive
 Fluid
TULCO LUBSOIL TO-4 50 (--- GAL)

RECOMMENDATION

Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		TO10003138	TO10002905	TO10002429
Sample Date		Client Info		20 Feb 2024	06 Nov 2023	07 Aug 2023
Machine Age	hrs	Client Info		30863	30346	29827
Oil Age	hrs	Client Info		4779	4262	3743
Filter Age	hrs	Client Info		0	0	545
Oil Changed		Client Info		Not Changd	Not Changd	Not Changd
Filter Changed		Client Info		None	None	Changed
Sample Status				NORMAL	NORMAL	NORMAL

WEAR

All component wear rates are normal.

PQ	UOM	Method	Limit/Abn	Current	History1	History2
Iron	ppm	ASTM D5185m	>500	44	37	37
Chromium	ppm	ASTM D5185m	>10	<1	<1	<1
Nickel	ppm	ASTM D5185m	>10	0	<1	<1
Titanium	ppm	ASTM D5185m		<1	<1	<1
Silver	ppm	ASTM D5185m		0	0	0
Aluminum	ppm	ASTM D5185m	>25	5	4	8
Lead	ppm	ASTM D5185m	>25	<1	0	0
Copper	ppm	ASTM D5185m	>50	<1	1	1
Tin	ppm	ASTM D5185m	>10	0	0	0
Vanadium	ppm	ASTM D5185m		0	0	<1
White Metal	scalar	*Visual	NONE	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	NONE

CONTAMINATION













There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185m	>75	24	21	22
Potassium	ppm	ASTM D5185m	>20	0	2	2
Water		WC Method	>0.2	NEG	NEG	NEG
Silt	scalar	*Visual	NONE	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG	NEG

FLUID CONDITION

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

Sodium	ppm	ASTM D5185m		0	3	4
Boron	ppm	ASTM D5185m		0	0	0
Barium	ppm	ASTM D5185m		0	0	0
Molybdenum	ppm	ASTM D5185m		<1	2	2
Manganese	ppm	ASTM D5185m		<1	<1	<1
Magnesium	ppm	ASTM D5185m		27	22	21
Calcium	ppm	ASTM D5185m		4209	4126	4537
Phosphorus	ppm	ASTM D5185m		809	850	868
Zinc	ppm	ASTM D5185m		1043	1039	1115
Sulfur	ppm	ASTM D5185m		4811	5019	5604
Acid Number (AN)	mg KOH/g	ASTM D8045		0.73	0.75	0.99
Visc @ 40°C	cSt	ASTM D445		194	193	194
Visc @ 100°C	cSt	ASTM D445		17.1	17.1	17.0
Viscosity Index (VI)	Scale	ASTM D2270		93	94	92

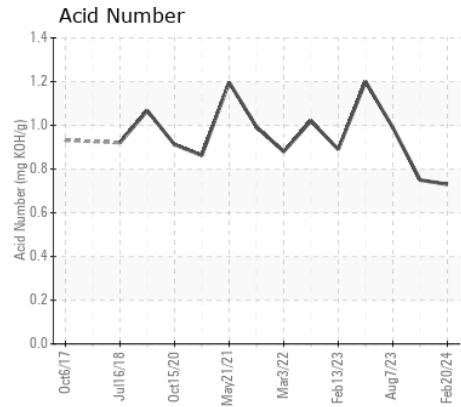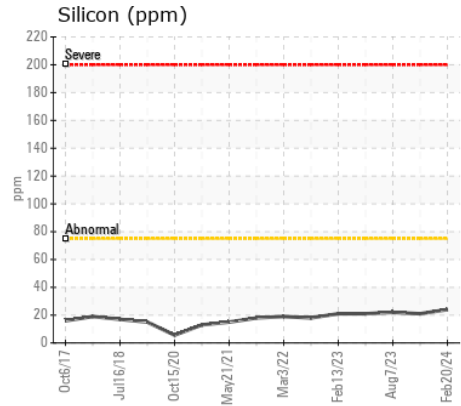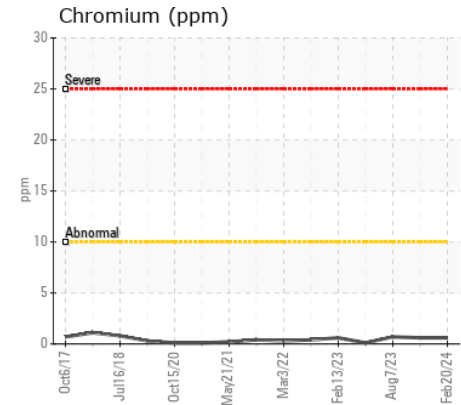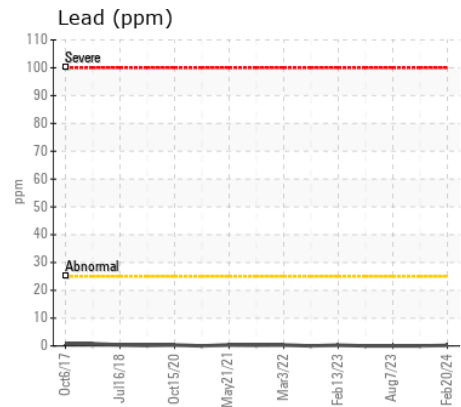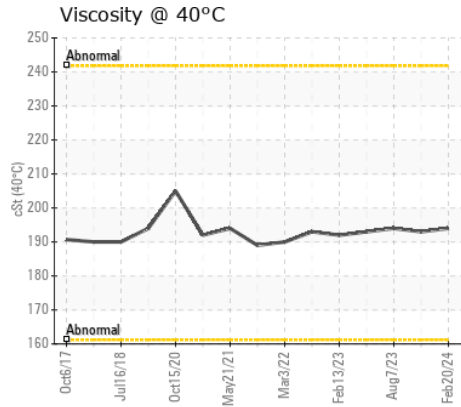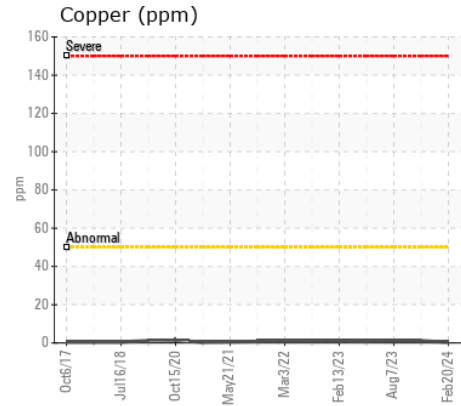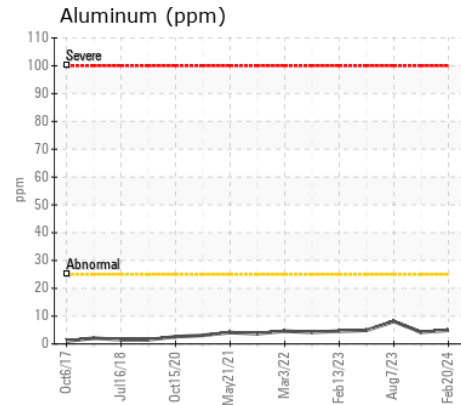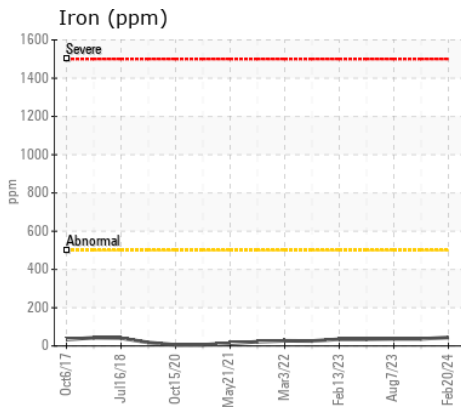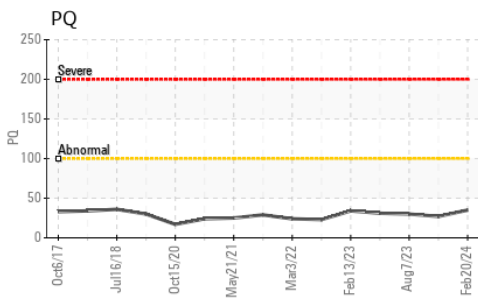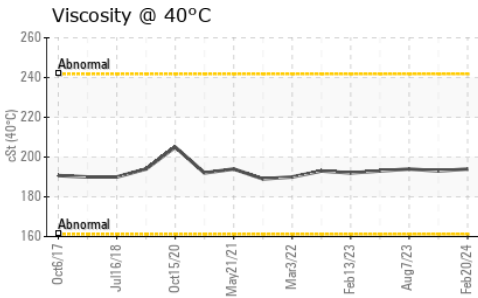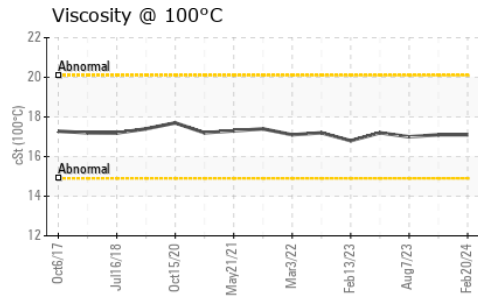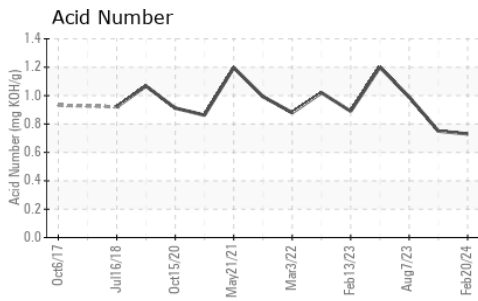

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : TO10003138
Lab Number : 06101076
Unique Number : 10899306
Test Package : MOB 2 (Additional Tests: KV100, PQ, VI)

Received : 26 Feb 2024
Tested : 27 Feb 2024
Diagnosed : 27 Feb 2024 - Doug Bogart

ANCHOR STONE TULSA ROCK
 TULSA ROCK QUARRY, 66TH ST N 145TH AVENUE
 TULSA, OK
 US 74137

Contact: MIKE SNYDER
 msnyder@anchorstoneco.com
 T: (417)850-9635

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

F: