



WEAR	<b>NORMAL</b>
CONTAMINATION	<b>NORMAL</b>
FLUID CONDITION	<b>NORMAL</b>

Area  
**ARTHUR J CARSON**  
Machine Id  
**[ARTHUR J CARSON] 004 556145-4**  
Component  
**Port Reduction Gear**  
Fluid  
**CHEVRON URSA SUPER PLUS 40 (--- GAL)**

**RECOMMENDATION**

Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		<b>MW06101080</b>	MW06040112	MW0058374
Sample Date		Client Info		<b>04 Feb 2024</b>	03 Dec 2023	01 Sep 2023
Machine Age	hrs	Client Info		<b>11713</b>	10562	10237
Oil Age	hrs	Client Info		<b>0</b>	0	1485
Filter Age	hrs	Client Info		<b>0</b>	0	1485
Oil Changed		Client Info		<b>N/A</b>	N/A	N/A
Filter Changed		Client Info		<b>N/A</b>	N/A	N/A
Sample Status				<b>NORMAL</b>	NORMAL	NORMAL

**WEAR**

All component wear rates are normal.

Iron	ppm	ASTM D5185m	>150	<b>0</b>	<1	3
Chromium	ppm	ASTM D5185m	>10	<b>&lt;1</b>	0	0
Nickel	ppm	ASTM D5185m	>10	<b>0</b>	0	0
Titanium	ppm	ASTM D5185m		<b>0</b>	0	0
Silver	ppm	ASTM D5185m		<b>0</b>	0	0
Aluminum	ppm	ASTM D5185m	>25	<b>&lt;1</b>	<1	<1
Lead	ppm	ASTM D5185m	>100	<b>0</b>	<1	0
Copper	ppm	ASTM D5185m	>50	<b>5</b>	4	0
Tin	ppm	ASTM D5185m	>10	<b>0</b>	<1	0
Vanadium	ppm	ASTM D5185m		<b>0</b>	0	0
White Metal	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE

**CONTAMINATION**







There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185m	>50	<b>3</b>	5	4
Potassium	ppm	ASTM D5185m	>20	<b>0</b>	<1	0
Water		WC Method	>0.1	<b>NEG</b>	NEG	NEG
Silt	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Debris	scalar	*Visual	NONE	<b>LIGHT</b>	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Appearance	scalar	*Visual	NORML	<b>NORML</b>	NORML	NORML
Odor	scalar	*Visual	NORML	<b>NORML</b>	NORML	NORML
Emulsified Water	scalar	*Visual	>0.1	<b>NEG</b>	NEG	NEG

**FLUID CONDITION**

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

Sodium	ppm	ASTM D5185m		<b>0</b>	8	2
Boron	ppm	ASTM D5185m		<b>271</b>	295	340
Barium	ppm	ASTM D5185m		<b>0</b>	0	0
Molybdenum	ppm	ASTM D5185m		<b>31</b>	32	31
Manganese	ppm	ASTM D5185m		<b>&lt;1</b>	<1	<1
Magnesium	ppm	ASTM D5185m		<b>28</b>	26	9
Calcium	ppm	ASTM D5185m		<b>2256</b>	2194	2498
Phosphorus	ppm	ASTM D5185m	1000	<b>682</b>	683	709
Zinc	ppm	ASTM D5185m	1090	<b>813</b>	758	783
Sulfur	ppm	ASTM D5185m		<b>2692</b>	2608	3254
Acid Number (AN)	mg KOH/g	ASTM D8045		<b>1.03</b>	1.08	1.01
Visc @ 40°C	cSt	ASTM D445	143	<b>131</b>	132	133

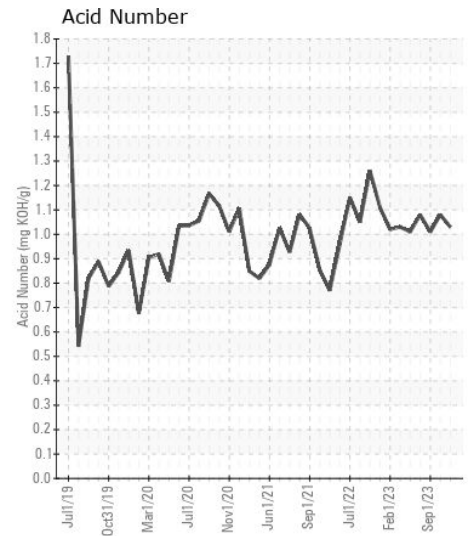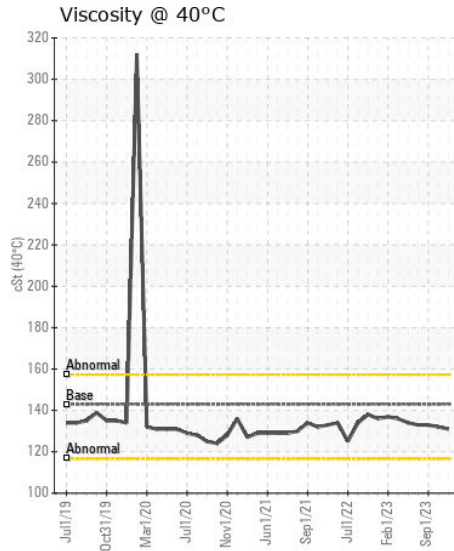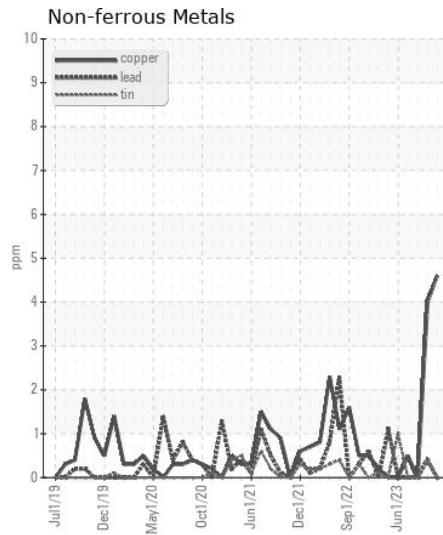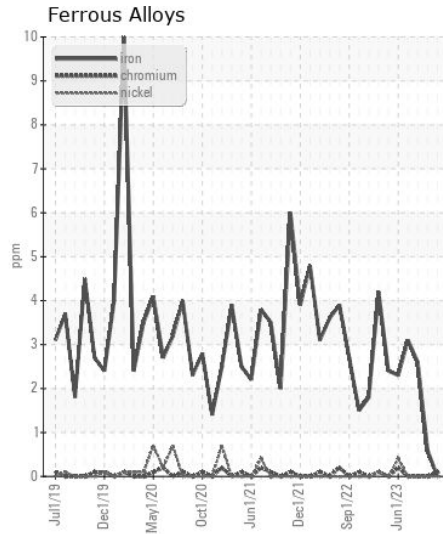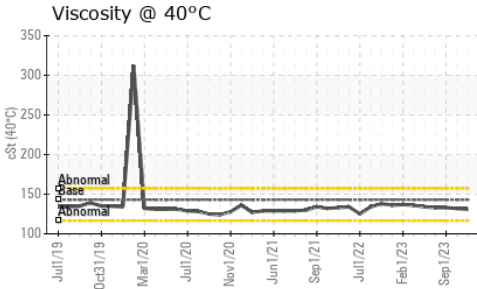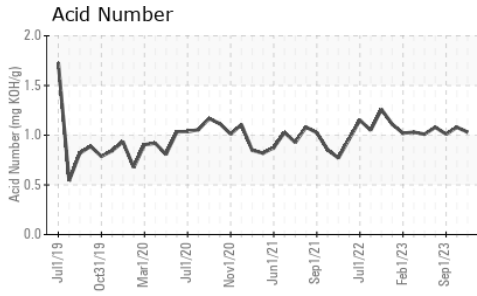

Certificate L2367

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : MW06101080  
**Lab Number** : 06101080  
**Unique Number** : 10899310  
**Test Package** : MAR 2  
**Received** : 26 Feb 2024  
**Tested** : 27 Feb 2024  
**Diagnosed** : 27 Feb 2024 - Doug Bogart

**INGRAM BARGE**  
 900 S 3RD ST  
 PADUCAH, KY  
 US 42003

Contact: JAMES ADAIR  
 james.adair@ingrambarga.com  
 T: (270)415-4467  
 F: (615)695-3697

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)