



TRAAP

Texas Refinery Advanced Analysis Program

OIL ANALYSIS REPORT

WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL

Machine Id

T11

Component

1 Transmission (Manual)

Fluid

TRC TEXTRANS MULTI-VEHICLE SYN ATF (10 GAL)

RECOMMENDATION

Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		TR0001466	TR0001269	TR0000789
Sample Date		Client Info		23 Feb 2024	18 Oct 2023	13 Feb 2023
Machine Age	hrs	Client Info		8274	7644	6188
Oil Age	hrs	Client Info		8274	7644	1
Filter Age	hrs	Client Info		8274	7644	0
Oil Changed		Client Info		Not Changd	Not Changd	Not Changd
Filter Changed		Client Info		Not Changd	Not Changd	N/A
Sample Status				NORMAL	NORMAL	NORMAL

WEAR

All component wear rates are normal.

Iron	ppm	ASTM D5185m	>200	40	17	24
Chromium	ppm	ASTM D5185m	>5	<1	0	0
Nickel	ppm	ASTM D5185m	>5	0	0	0
Titanium	ppm	ASTM D5185m		0	0	0
Silver	ppm	ASTM D5185m	>7	0	0	0
Aluminum	ppm	ASTM D5185m	>25	2	0	0
Lead	ppm	ASTM D5185m	>45	0	0	0
Copper	ppm	ASTM D5185m	>225	31	29	20
Tin	ppm	ASTM D5185m	>10	0	0	0
Vanadium	ppm	ASTM D5185m		0	0	0
White Metal	scalar	*Visual	NONE	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	NONE

CONTAMINATION












There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185m	>125	20	20	46
Potassium	ppm	ASTM D5185m	>20	0	<1	0
Water		WC Method	>0.1	NEG	NEG	NEG
Silt	scalar	*Visual	NONE	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.1	NEG	NEG	NEG

FLUID CONDITION

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

Sodium	ppm	ASTM D5185m		0	2	<1
Boron	ppm	ASTM D5185m		262	335	240
Barium	ppm	ASTM D5185m		0	0	0
Molybdenum	ppm	ASTM D5185m		0	0	0
Manganese	ppm	ASTM D5185m		1	<1	<1
Magnesium	ppm	ASTM D5185m		2	2	<1
Calcium	ppm	ASTM D5185m		26	10	13
Phosphorus	ppm	ASTM D5185m		1137	1097	814
Zinc	ppm	ASTM D5185m		8	5	0
Sulfur	ppm	ASTM D5185m		19601	19215	17295
Acid Number (AN)	mg KOH/g	ASTM D8045		2.38	2.18	2.08
Visc @ 40°C	cSt	ASTM D445		336	331	---
Visc @ 100°C	cSt	ASTM D445	7.3	27.0	27.0	28.2
Viscosity Index (VI)	Scale	ASTM D2270	193	107	108	---

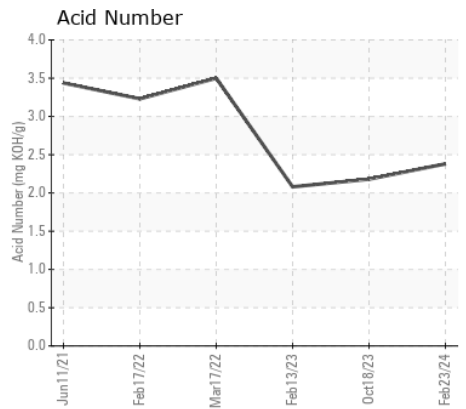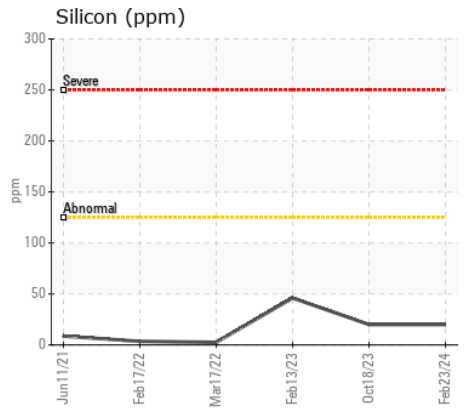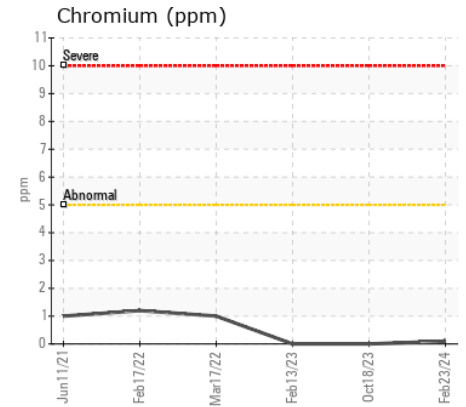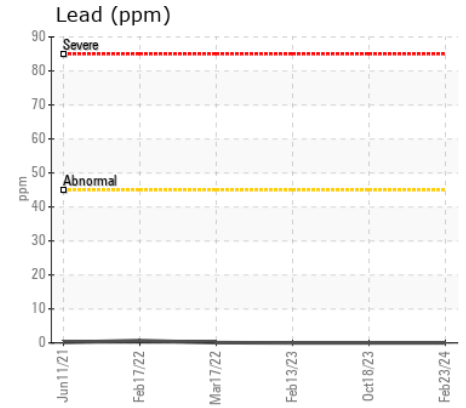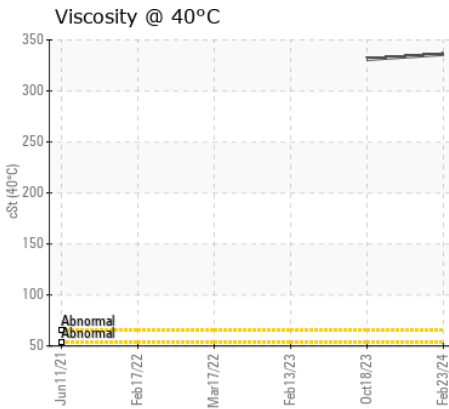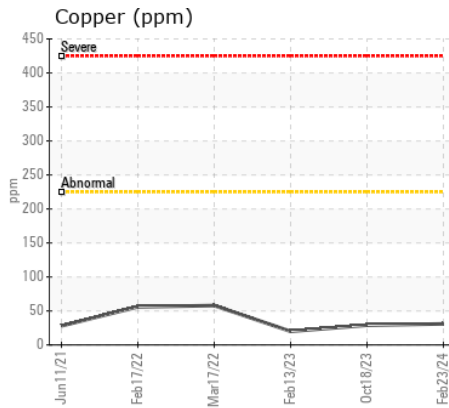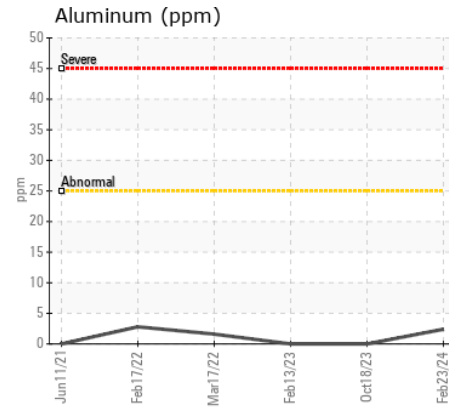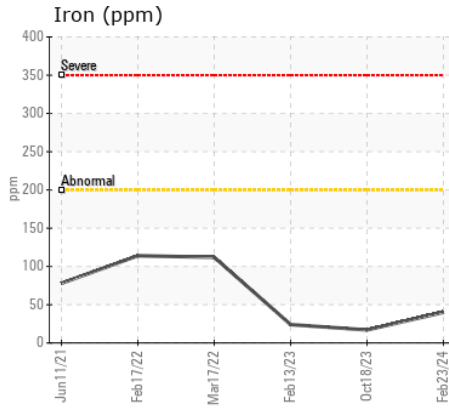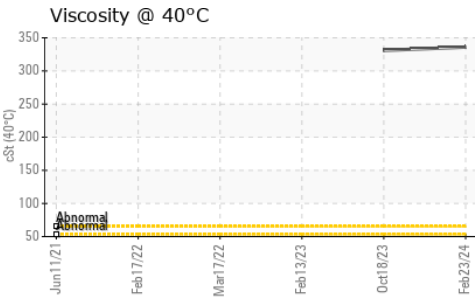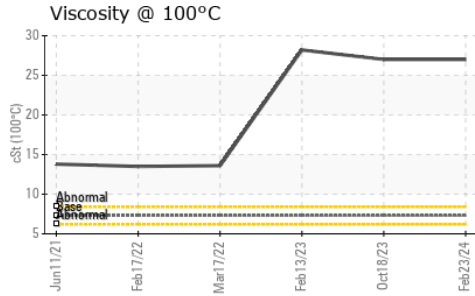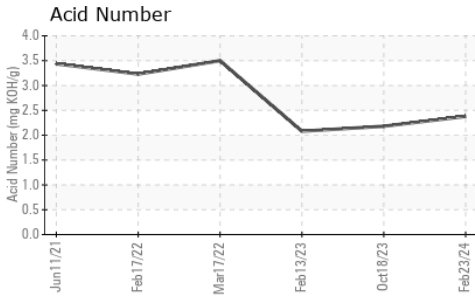

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : TR0001466
Lab Number : 06101113
Unique Number : 10899343
Test Package : MOB 2 (Additional Tests: KV100, VI)

Received : 26 Feb 2024
Tested : 28 Feb 2024
Diagnosed : 28 Feb 2024 - Doug Bogart

S S CONCRETE MATERIALS LLC
 P.O. BOX 23283
 BULLHEAD CITY, AZ
 US 86439
 Contact: SERVICE MANAGER
 snsmaterials1@gmail.com

To discuss this sample report, contact Customer Service at 1-800-827-0711.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T: (928)754-1991