



WEAR	<b>NORMAL</b>
CONTAMINATION	<b>NORMAL</b>
FLUID CONDITION	<b>NORMAL</b>

Area  
**[W20962-02-DILULLO]**  
 Machine Id  
**JOHN DEERE 5085E 1LV5085EKFN310097**  
 Component  
**Transmission (Manual)**  
 Fluid  
**TDH FLUID SAE 75W80 (--- GAL)**

### RECOMMENDATION

Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		<b>JR0204421</b>	---	---
Sample Date		Client Info		<b>21 Feb 2024</b>	---	---
Machine Age	hrs	Client Info		<b>2666</b>	---	---
Oil Age	hrs	Client Info		<b>0</b>	---	---
Filter Age	hrs	Client Info		<b>0</b>	---	---
Oil Changed		Client Info		<b>Not Changed</b>	---	---
Filter Changed		Client Info		<b>Not Changed</b>	---	---
Sample Status				<b>NORMAL</b>	---	---

### WEAR

All component wear rates are normal.

PQ		ASTM D8184	>95	<b>44</b>	---	---
Iron	ppm	ASTM D5185m	>200	<b>103</b>	---	---
Chromium	ppm	ASTM D5185m	>5	<b>&lt;1</b>	---	---
Nickel	ppm	ASTM D5185m	>5	<b>0</b>	---	---
Titanium	ppm	ASTM D5185m		<b>0</b>	---	---
Silver	ppm	ASTM D5185m	>7	<b>0</b>	---	---
Aluminum	ppm	ASTM D5185m	>25	<b>4</b>	---	---
Lead	ppm	ASTM D5185m	>45	<b>4</b>	---	---
Copper	ppm	ASTM D5185m	>225	<b>51</b>	---	---
Tin	ppm	ASTM D5185m	>10	<b>2</b>	---	---
Vanadium	ppm	ASTM D5185m		<b>0</b>	---	---
White Metal	scalar	*Visual	NONE	<b>NONE</b>	---	---
Yellow Metal	scalar	*Visual	NONE	<b>NONE</b>	---	---

### CONTAMINATION







There is no indication of any contamination in the fluid.

Silicon	ppm	ASTM D5185m	>125	<b>7</b>	---	---
Potassium	ppm	ASTM D5185m	>20	<b>0</b>	---	---
Water		WC Method	>0.1	<b>NEG</b>	---	---
Silt	scalar	*Visual	NONE	<b>NONE</b>	---	---
Debris	scalar	*Visual	NONE	<b>LIGHT</b>	---	---
Sand/Dirt	scalar	*Visual	NONE	<b>NONE</b>	---	---
Appearance	scalar	*Visual	NORML	<b>NORML</b>	---	---
Odor	scalar	*Visual	NORML	<b>NORML</b>	---	---
Emulsified Water	scalar	*Visual	>0.1	<b>NEG</b>	---	---

### FLUID CONDITION

The condition of the fluid is suitable for further service.

Sodium	ppm	ASTM D5185m		<b>0</b>	---	---
Boron	ppm	ASTM D5185m	10	<b>12</b>	---	---
Barium	ppm	ASTM D5185m	10	<b>&lt;1</b>	---	---
Molybdenum	ppm	ASTM D5185m	10	<b>18</b>	---	---
Manganese	ppm	ASTM D5185m		<b>2</b>	---	---
Magnesium	ppm	ASTM D5185m	100	<b>158</b>	---	---
Calcium	ppm	ASTM D5185m	3500	<b>3069</b>	---	---
Phosphorus	ppm	ASTM D5185m	1150	<b>937</b>	---	---
Zinc	ppm	ASTM D5185m	1150	<b>1217</b>	---	---
Sulfur	ppm	ASTM D5185m	5000	<b>3512</b>	---	---
Visc @ 40°C	cSt	ASTM D445	48	<b>51.4</b>	---	---

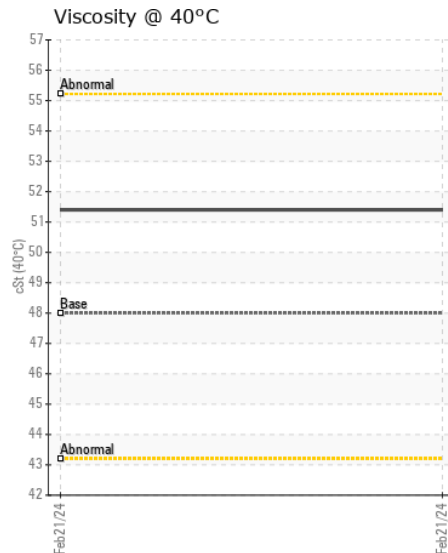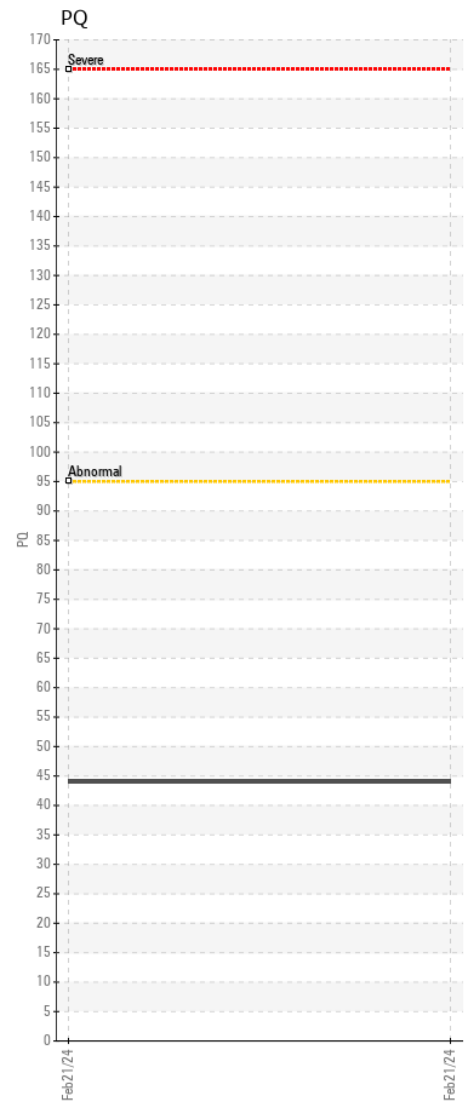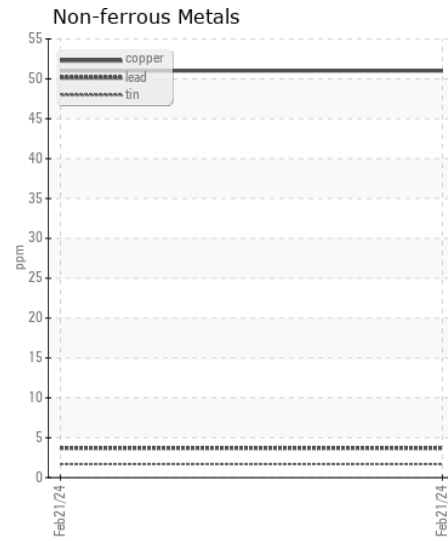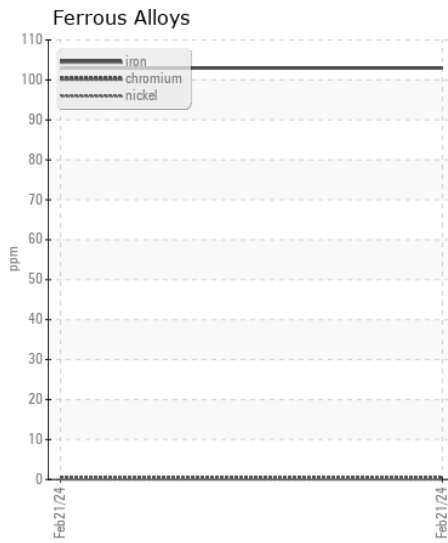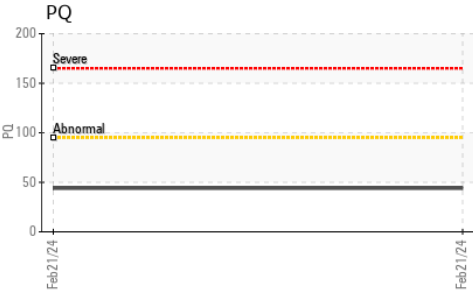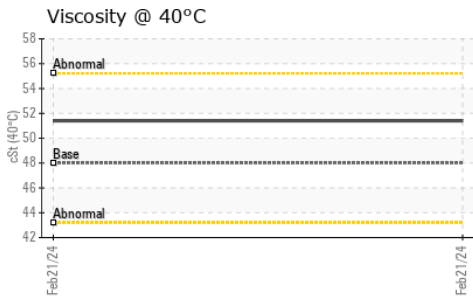

Certificate L2367

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : JR0204421 **Received** : 26 Feb 2024  
**Lab Number** : 06101174 **Tested** : 28 Feb 2024  
**Unique Number** : 10899404 **Diagnosed** : 28 Feb 2024 - Sean Felton  
**Test Package** : CONST ( Additional Tests: PQ )

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

**JRE - BURKEVILLE**  
 510 WEST COLONIAL DR  
 BURKEVILLE, VA  
 US 23922

Contact: BRIAN HARRIS  
 bharris@jamesriverequipment.com

T:  
 F: (434)767-3774