



WEAR **NORMAL**

CONTAMINATION **NORMAL**

FLUID CONDITION **NORMAL**



Area
KEMP QUARRIES / BCS - GRAVETTE [67745]
Machine Id
WL124
Component
Rear Right Final Drive
Fluid
PETRO CANADA PRODURO TO-4 SAE 50 (--- GAL)

RECOMMENDATION

Resample at the next service interval to monitor. (Customer Sample Comment: Pm3)

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		PCA0108528	PCA0086998	PCA0084629
Sample Date		Client Info		08 Feb 2024	12 Oct 2023	06 Jul 2023
Machine Age	hrs	Client Info		37365	37365	36752
Oil Age	hrs	Client Info		36319	37365	36752
Filter Age	hrs	Client Info		0	0	0
Oil Changed		Client Info		N/A	N/A	N/A
Filter Changed		Client Info		N/A	N/A	N/A
Sample Status				NORMAL	NORMAL	NORMAL

WEAR

All component wear rates are normal.

Iron	ppm	ASTM D5185m	>800	52	73	100
Chromium	ppm	ASTM D5185m	>10	<1	<1	<1
Nickel	ppm	ASTM D5185m	>5	0	<1	<1
Titanium	ppm	ASTM D5185m	>15	0	<1	<1
Silver	ppm	ASTM D5185m	>2	0	0	0
Aluminum	ppm	ASTM D5185m	>75	<1	2	6
Lead	ppm	ASTM D5185m	>10	0	<1	0
Copper	ppm	ASTM D5185m	>75	2	4	2
Tin	ppm	ASTM D5185m	>8	0	0	<1
Vanadium	ppm	ASTM D5185m		0	0	0
White Metal	scalar	*Visual	NONE	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	NONE

CONTAMINATION










There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185m	>400	12	19	30
Potassium	ppm	ASTM D5185m	>20	0	3	3
Water		WC Method	>0.2	NEG	NEG	NEG
Silt	scalar	*Visual	NONE	NONE	LIGHT	NONE
Debris	scalar	*Visual	NONE	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG	NEG

FLUID CONDITION

The condition of the oil is acceptable for the time in service.

Sodium	ppm	ASTM D5185m		0	0	2
Boron	ppm	ASTM D5185m	2	0	7	2
Barium	ppm	ASTM D5185m	0	0	9	0
Molybdenum	ppm	ASTM D5185m	0	0	2	1
Manganese	ppm	ASTM D5185m	0	<1	<1	1
Magnesium	ppm	ASTM D5185m	9	17	23	20
Calcium	ppm	ASTM D5185m	3114	2553	4044	3176
Phosphorus	ppm	ASTM D5185m	1099	922	1352	1071
Zinc	ppm	ASTM D5185m	1245	1186	1634	1318
Sulfur	ppm	ASTM D5185m	7086	4842	8629	8068
Visc @ 40°C	cSt	ASTM D445	213.9	176	175	177

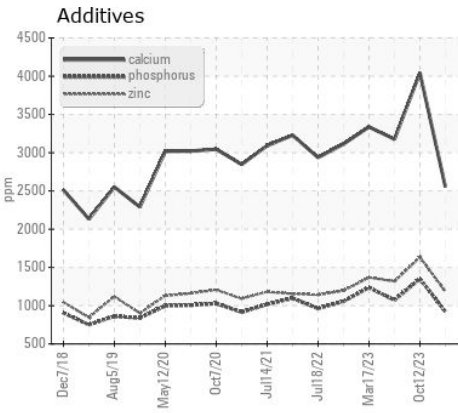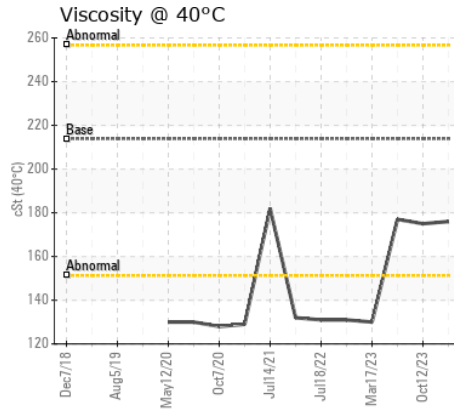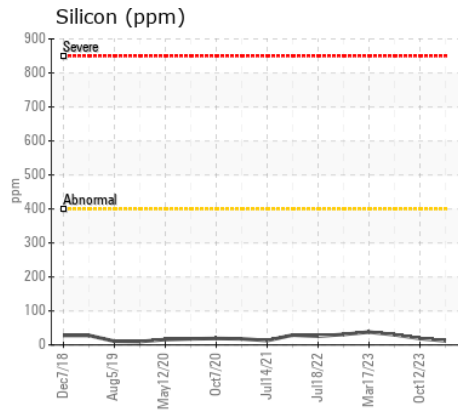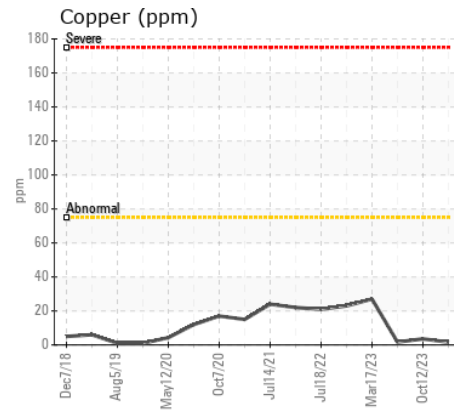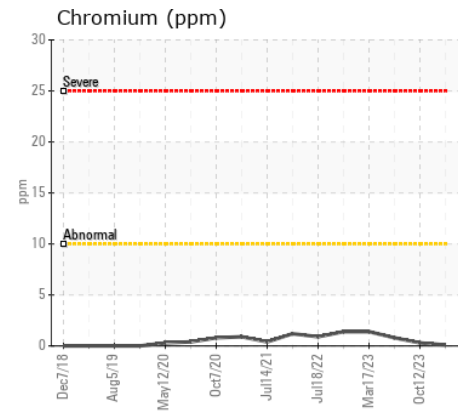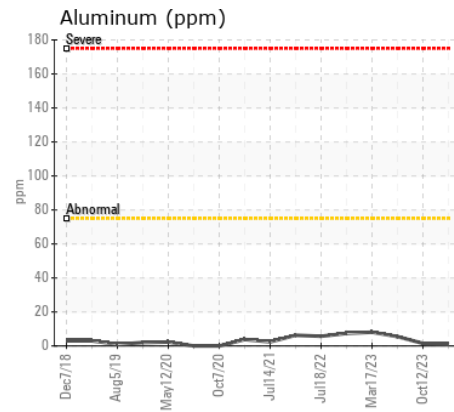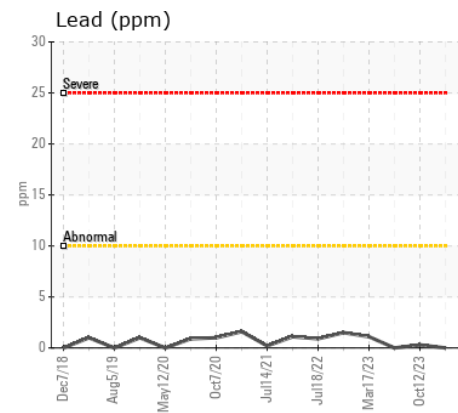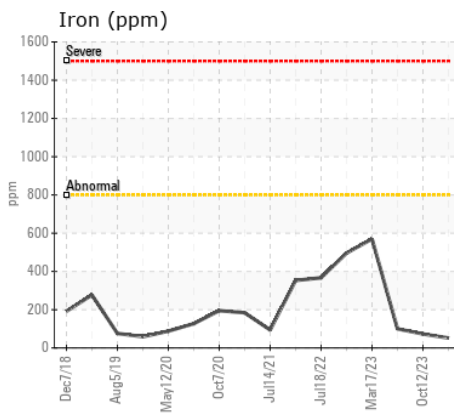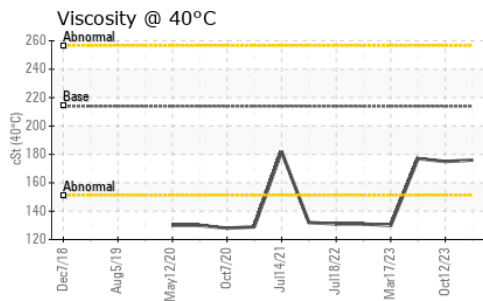

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : PCA0108528
Lab Number : 06101188
Unique Number : 10899418
Test Package : MOB 1

Kemp Quarries - Benton County Stone - Gravette
 15100 N Hwy 59
 Sulphur Springs, AR
 US 72768
 Contact:
 gravette@bentoncountystone.com

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T:
F: