



WEAR **NORMAL**

CONTAMINATION **NORMAL**

FLUID CONDITION **NORMAL**



Area **KEMP QUARRIES / BCS - GRAVETTE [68022]**

Machine Id **WL110**

Component **Rear Left Final Drive**

Fluid **PETRO CANADA PRODURO TO-4 SAE 50 (--- GAL)**

RECOMMENDATION

Resample at the next service interval to monitor. (Customer Sample Comment: Pm2)

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		PCA0108770	PCA0085720	PCA0062462
Sample Date		Client Info		13 Feb 2024	10 May 2023	29 Aug 2022
Machine Age	hrs	Client Info		28314	27770	27477
Oil Age	hrs	Client Info		544	27770	27477
Filter Age	hrs	Client Info		0	0	0
Oil Changed		Client Info		N/A	Changed	N/A
Filter Changed		Client Info		None	N/A	N/A
Sample Status				NORMAL	NORMAL	NORMAL

WEAR

All component wear rates are normal.

Iron	ppm	ASTM D5185m	>800	9	65	56
Chromium	ppm	ASTM D5185m	>10	<1	<1	<1
Nickel	ppm	ASTM D5185m	>5	0	0	<1
Titanium	ppm	ASTM D5185m	>15	0	<1	<1
Silver	ppm	ASTM D5185m	>2	0	0	<1
Aluminum	ppm	ASTM D5185m	>75	1	<1	3
Lead	ppm	ASTM D5185m	>10	0	0	<1
Copper	ppm	ASTM D5185m	>75	<1	17	14
Tin	ppm	ASTM D5185m	>8	0	<1	1
Vanadium	ppm	ASTM D5185m		0	0	0
White Metal	scalar	*Visual	NONE	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	NONE

CONTAMINATION










There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185m	>400	14	21	19
Potassium	ppm	ASTM D5185m	>20	0	0	0
Water		WC Method	>0.2	NEG	NEG	NEG
Silt	scalar	*Visual	NONE	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG	NEG

FLUID CONDITION

The condition of the oil is acceptable for the time in service.

Sodium	ppm	ASTM D5185m		0	3	2
Boron	ppm	ASTM D5185m	2	0	18	25
Barium	ppm	ASTM D5185m	0	0	11	0
Molybdenum	ppm	ASTM D5185m	0	<1	<1	<1
Manganese	ppm	ASTM D5185m	0	<1	1	<1
Magnesium	ppm	ASTM D5185m	9	19	31	18
Calcium	ppm	ASTM D5185m	3114	3122	2713	2753
Phosphorus	ppm	ASTM D5185m	1099	859	972	976
Zinc	ppm	ASTM D5185m	1245	1139	1077	1119
Sulfur	ppm	ASTM D5185m	7086	4377	6299	6225
Visc @ 40°C	cSt	ASTM D445	213.9	189	202	200

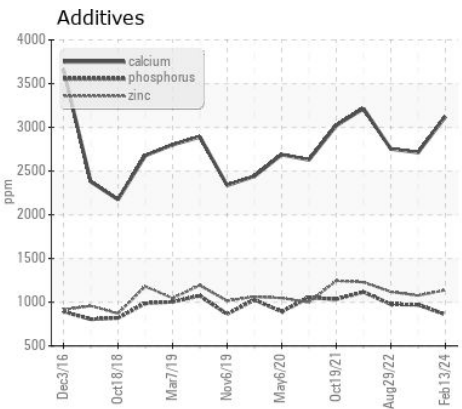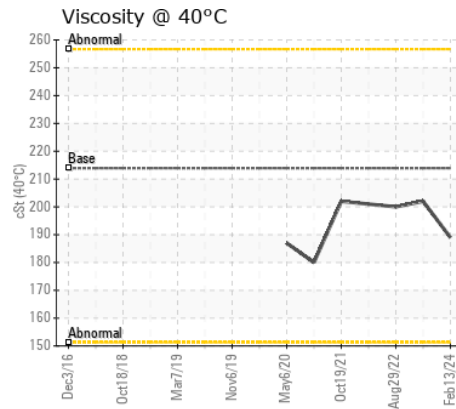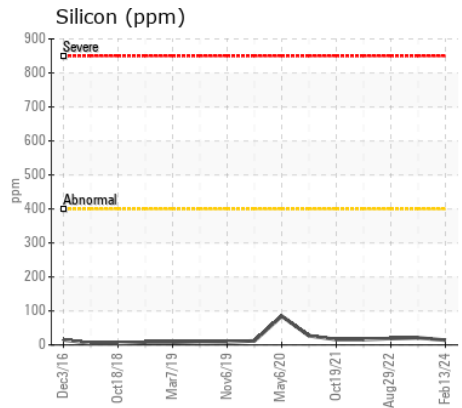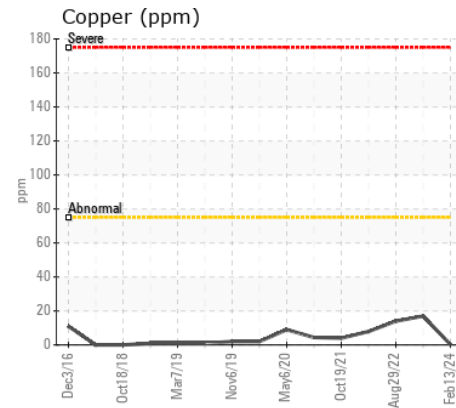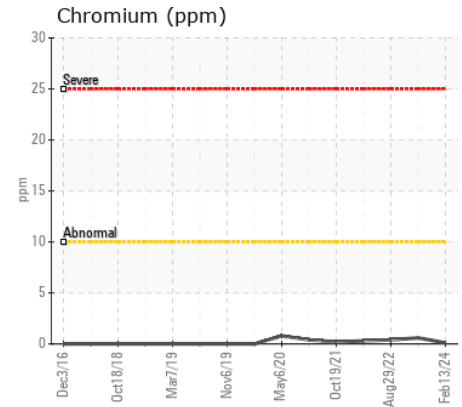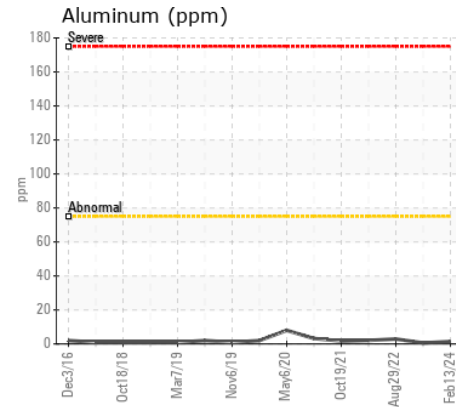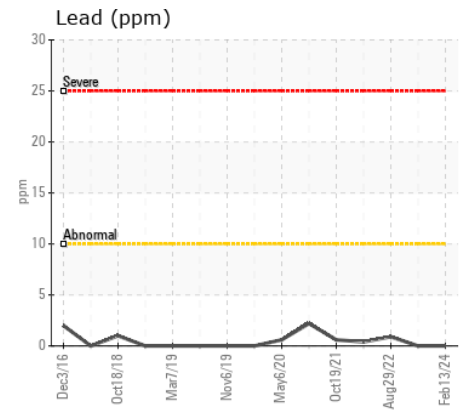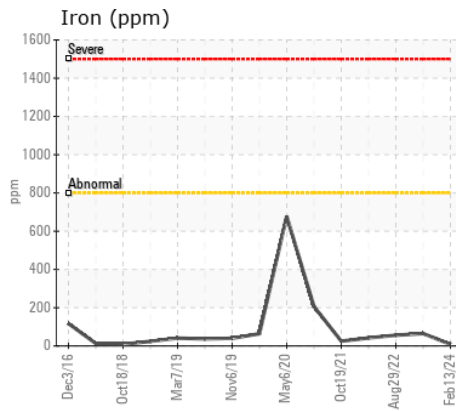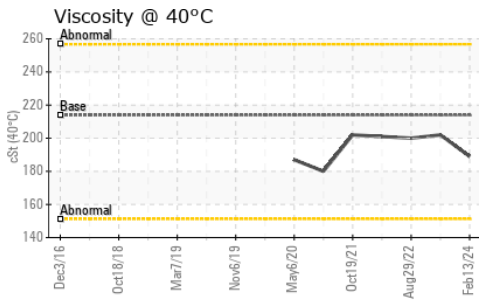

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : PCA0108770
Lab Number : 06101206
Unique Number : 10899436
Test Package : MOB 1

Received : 26 Feb 2024
Tested : 28 Feb 2024
Diagnosed : 28 Feb 2024 - Sean Felton

Kemp Quarries - Benton County Stone - Gravette
 15100 N Hwy 59
 Sulphur Springs, AR
 US 72768
 Contact:

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

gravette@bentoncountystone.com

T:
F: