



**McCLUNG-LOGAN**  
EQUIPMENT COMPANY, INC.

OIL ANALYSIS REPORT

WEAR	<b>NORMAL</b>
CONTAMINATION	<b>NORMAL</b>
FLUID CONDITION	<b>NORMAL</b>



Area  
**[W02008034]**  
Machine Id  
**VOLVO A25G 752865**  
Component  
**Front Differential**  
Fluid  
**VOLVO SUPER GEAR OIL 75W-80-GO102 (10 GAL)**

**RECOMMENDATION**

Resample at the next service interval to monitor. ( Customer Sample Comment: W02008034 1st 1000 hour service )

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		<b>ML0886252</b>	---	---
Sample Date		Client Info		<b>23 Feb 2024</b>	---	---
Machine Age	hrs	Client Info		<b>970</b>	---	---
Oil Age	hrs	Client Info		<b>970</b>	---	---
Filter Age	hrs	Client Info		<b>0</b>	---	---
Oil Changed		Client Info		<b>Changed</b>	---	---
Filter Changed		Client Info		<b>N/A</b>	---	---
Sample Status				<b>NORMAL</b>	---	---

**WEAR**

All component wear rates are normal.

Iron	ppm	ASTM D5185m	>900	<b>283</b>	---	---
Chromium	ppm	ASTM D5185m	>20	<b>6</b>	---	---
Nickel	ppm	ASTM D5185m	>10	<b>3</b>	---	---
Titanium	ppm	ASTM D5185m		<b>0</b>	---	---
Silver	ppm	ASTM D5185m		<b>&lt;1</b>	---	---
Aluminum	ppm	ASTM D5185m	>30	<b>&lt;1</b>	---	---
Lead	ppm	ASTM D5185m	>50	<b>0</b>	---	---
Copper	ppm	ASTM D5185m	>150	<b>16</b>	---	---
Tin	ppm	ASTM D5185m	>20	<b>&lt;1</b>	---	---
Vanadium	ppm	ASTM D5185m		<b>0</b>	---	---
White Metal	scalar	*Visual	NONE	<b>NONE</b>	---	---
Yellow Metal	scalar	*Visual	NONE	<b>NONE</b>	---	---

**CONTAMINATION**










There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185m	>50	<b>4</b>	---	---
Potassium	ppm	ASTM D5185m	>20	<b>0</b>	---	---
Water		WC Method	>0.2	<b>NEG</b>	---	---
Silt	scalar	*Visual	NONE	<b>NONE</b>	---	---
Debris	scalar	*Visual	NONE	<b>NONE</b>	---	---
Sand/Dirt	scalar	*Visual	NONE	<b>NONE</b>	---	---
Appearance	scalar	*Visual	NORML	<b>NORML</b>	---	---
Odor	scalar	*Visual	NORML	<b>NORML</b>	---	---
Emulsified Water	scalar	*Visual	>0.2	<b>NEG</b>	---	---

**FLUID CONDITION**

The condition of the oil is acceptable for the time in service.

Sodium	ppm	ASTM D5185m		<b>0</b>	---	---
Boron	ppm	ASTM D5185m		<b>257</b>	---	---
Barium	ppm	ASTM D5185m		<b>6</b>	---	---
Molybdenum	ppm	ASTM D5185m		<b>5</b>	---	---
Manganese	ppm	ASTM D5185m		<b>12</b>	---	---
Magnesium	ppm	ASTM D5185m		<b>7</b>	---	---
Calcium	ppm	ASTM D5185m		<b>192</b>	---	---
Phosphorus	ppm	ASTM D5185m		<b>1317</b>	---	---
Zinc	ppm	ASTM D5185m		<b>92</b>	---	---
Sulfur	ppm	ASTM D5185m		<b>23009</b>	---	---
Visc @ 40°C	cSt	ASTM D445		<b>99.8</b>	---	---

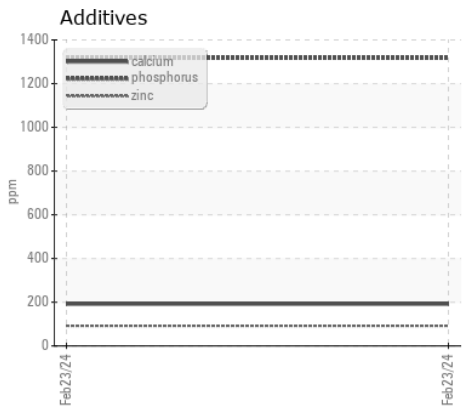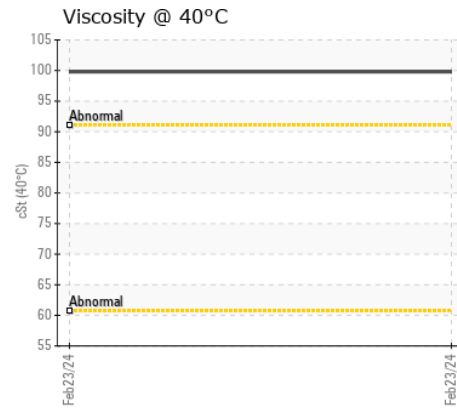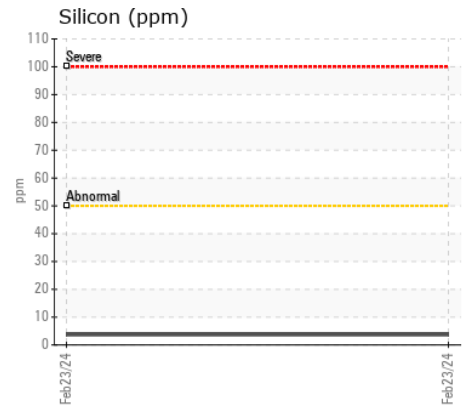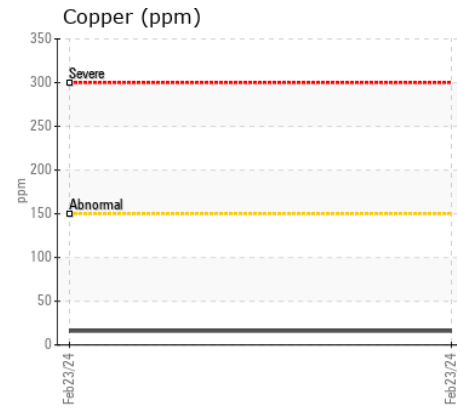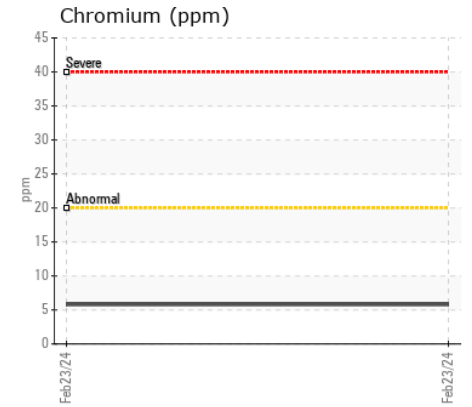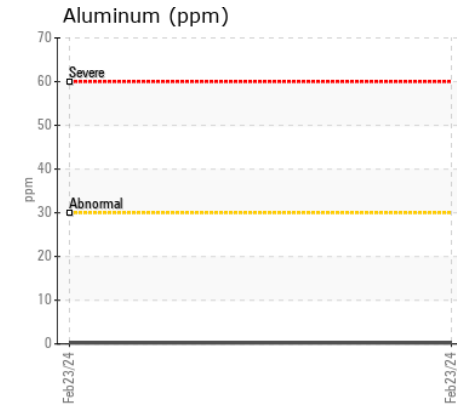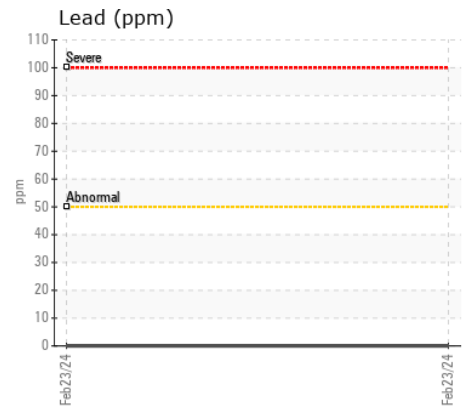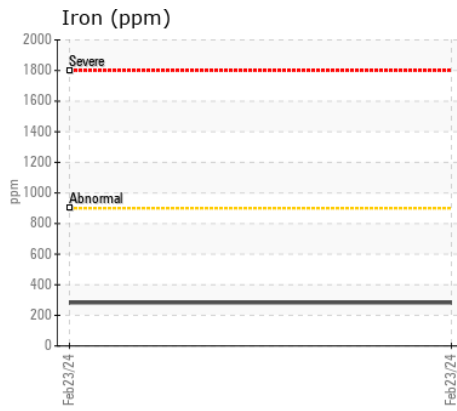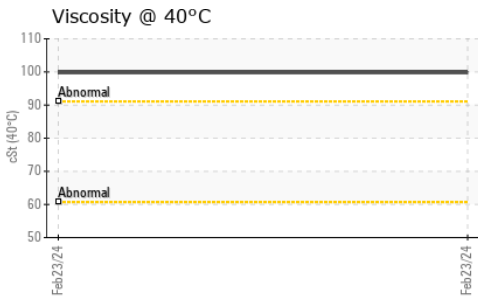

Certificate L2367

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : ML0886252  
**Lab Number** : 06101225  
**Unique Number** : 10899455  
**Test Package** : MOBCE

**Received** : 26 Feb 2024  
**Tested** : 28 Feb 2024  
**Diagnosed** : 28 Feb 2024 - Don Baldrige

**MCCLUNG-LOGAN EQUIPMENT CO - MANASSAS**  
 8450 QUARRY ROAD  
 MANASSAS, VA  
 US 20110  
 Contact: DARRELL ANDES  
 dandes@mcclung-logan.com

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T:  
 F: (703)393-7844