



ASCENDUM

OIL ANALYSIS REPORT

WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL



Area
Ascendum Machinery/500 Hour CSA
Machine Id
VOLVO L150H 2041 (S/N 6409)
Component
Diesel Engine
Fluid
VOLVO ULTRA DIESEL ENGINE OIL 15W40 VDS-3 (--- GAL)

RECOMMENDATION

Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		ASC0000568	ASC0005348	ASC0000331
Sample Date		Client Info		23 Feb 2024	08 Nov 2023	01 Aug 2023
Machine Age	hrs	Client Info		9577	9069	8489
Oil Age	hrs	Client Info		508	580	480
Filter Age	hrs	Client Info		0	580	480
Oil Changed		Client Info		Changed	Changed	Changed
Filter Changed		Client Info		Changed	Changed	Changed
Sample Status				NORMAL	NORMAL	NORMAL

WEAR

All component wear rates are normal.

Iron	ppm	ASTM D5185m	>100	5	1	2
Chromium	ppm	ASTM D5185m	>10	0	0	0
Nickel	ppm	ASTM D5185m	>10	0	0	0
Titanium	ppm	ASTM D5185m		0	0	<1
Silver	ppm	ASTM D5185m	>2	0	0	0
Aluminum	ppm	ASTM D5185m	>10	1	1	3
Lead	ppm	ASTM D5185m	>20	0	0	<1
Copper	ppm	ASTM D5185m	>15	<1	0	1
Tin	ppm	ASTM D5185m	>10	0	<1	0
Vanadium	ppm	ASTM D5185m		0	0	<1
White Metal	scalar	*Visual	NONE	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	NONE

CONTAMINATION











There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185m	>20	5	4	2
Potassium	ppm	ASTM D5185m	>20	0	<1	<1
Fuel		WC Method	>6.0	<1.0	<1.0	<1.0
Water		WC Method	>0.1	NEG	NEG	NEG
Glycol		WC Method		NEG	NEG	NEG
Soot %	%	*ASTM D7844	>3	0.1	0.1	0.1
Nitration	Abs/cm	*ASTM D7624	>20	6.6	6.8	8.0
Sulfation	Abs/.1mm	*ASTM D7415	>30	21.9	21.2	17.7
Silt	scalar	*Visual	NONE	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	LIGHT	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.1	NEG	NEG	NEG

FLUID CONDITION

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

Sodium	ppm	ASTM D5185m		2	1	2
Boron	ppm	ASTM D5185m	2.5	50	45	42
Barium	ppm	ASTM D5185m	0.0	0	0	0
Molybdenum	ppm	ASTM D5185m	0.7	38	43	71
Manganese	ppm	ASTM D5185m	0.0	<1	0	<1
Magnesium	ppm	ASTM D5185m	256	480	471	239
Calcium	ppm	ASTM D5185m	2057	1735	1644	1813
Phosphorus	ppm	ASTM D5185m	935	937	945	926
Zinc	ppm	ASTM D5185m	1223	1065	1162	1101
Sulfur	ppm	ASTM D5185m	4079	3042	3028	3838
Oxidation	Abs/.1mm	*ASTM D7414	>25	20.6	19.4	13.4
Base Number (BN)	mg KOH/g	ASTM D2896	10	9.9	10.0	6.3
Visc @ 100°C	cSt	ASTM D445	15.0	12.2	12.4	12.6

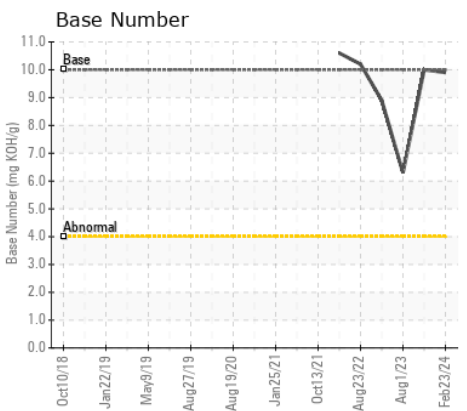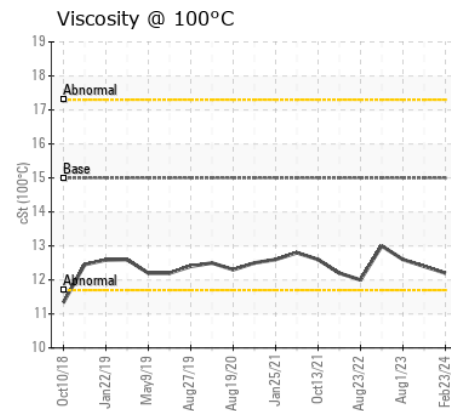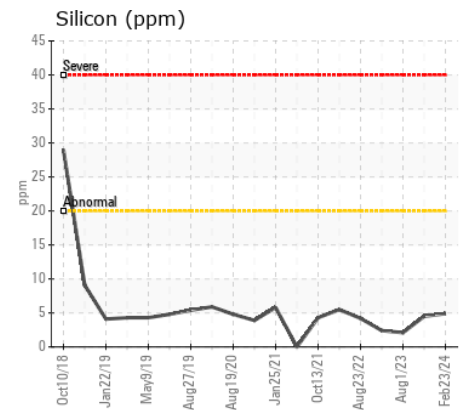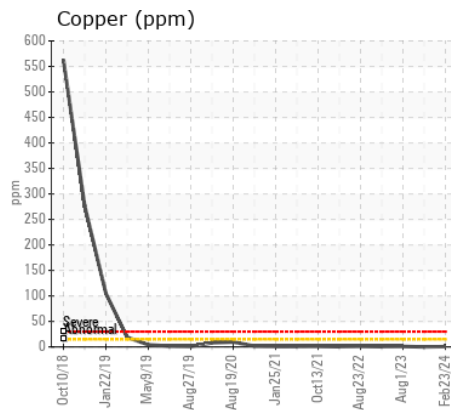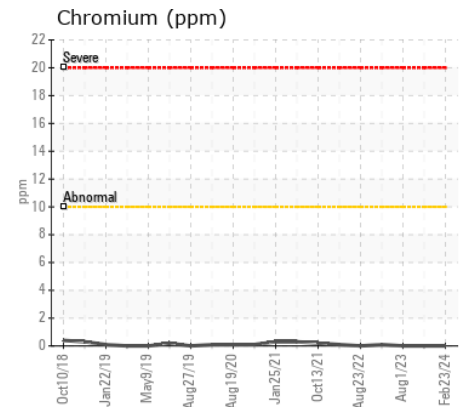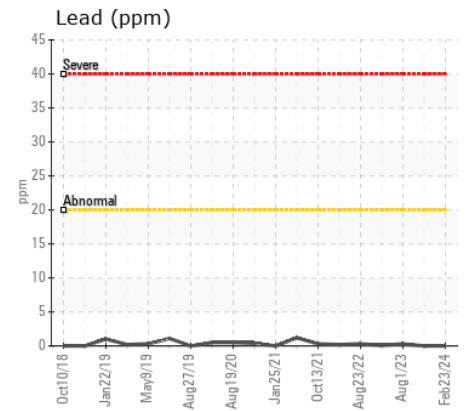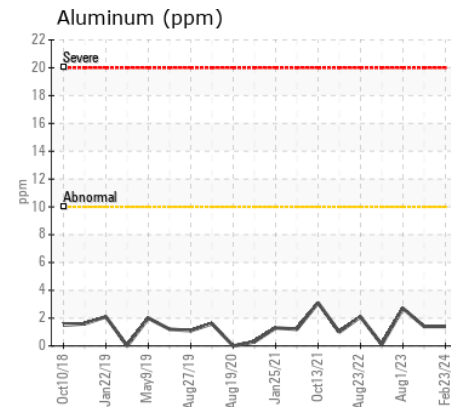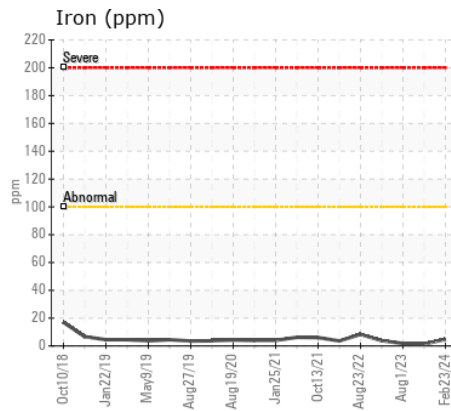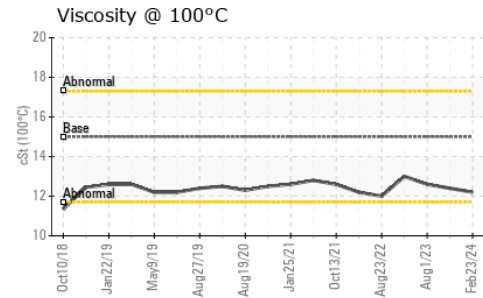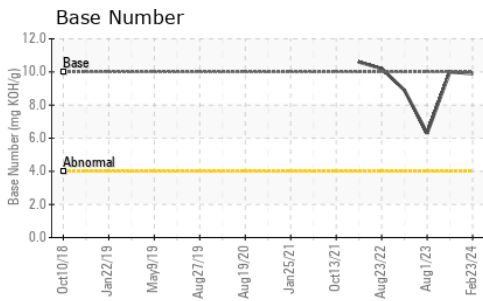

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
 Sample No. : ASC0000568
 Lab Number : 06101304
 Unique Number : 10899534
 Test Package : MOBCE (Additional Tests: TBN)

Received : 27 Feb 2024
 Tested : 28 Feb 2024
 Diagnosed : 28 Feb 2024 - Wes Davis

TRIANGLE GRADING AND PAVING INC
 1521 Huffman Mill Rd
 BURLINGTON, NC
 US 27216

Contact: KAREN HILLIARD
 khilliard@trianglegradingpaving.com
 T: (336)584-1745
 F: (336)584-0145

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)