



WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL

Machine Id
KENWORTH 523099-SW7309
 Component
Diesel Engine
 Fluid
MOBIL DELVAC ELITE 15W40 (--- GAL)

RECOMMENDATION

Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		GFL0111341	GFL0095494	---
Sample Date		Client Info		08 Feb 2024	07 Dec 2023	---
Machine Age	hrs	Client Info		4310	3820	---
Oil Age	hrs	Client Info		0	500	---
Filter Age	hrs	Client Info		0	500	---
Oil Changed		Client Info		Changed	Changed	---
Filter Changed		Client Info		Changed	Changed	---
Sample Status				NORMAL	NORMAL	---

WEAR

All component wear rates are normal.

Iron	ppm	ASTM D5185m	>100	13	26	---
Chromium	ppm	ASTM D5185m	>20	0	<1	---
Nickel	ppm	ASTM D5185m	>4	0	<1	---
Titanium	ppm	ASTM D5185m		0	<1	---
Silver	ppm	ASTM D5185m	>3	0	0	---
Aluminum	ppm	ASTM D5185m	>20	4	5	---
Lead	ppm	ASTM D5185m	>40	0	0	---
Copper	ppm	ASTM D5185m	>330	<1	2	---
Tin	ppm	ASTM D5185m	>15	0	0	---
Vanadium	ppm	ASTM D5185m		0	<1	---
White Metal	scalar	*Visual	NONE	NONE	NONE	---
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	---

CONTAMINATION







There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185m	>25	8	10	---
Potassium	ppm	ASTM D5185m	>20	2	6	---
Fuel		WC Method	>5	<1.0	<1.0	---
Water		WC Method	>0.2	NEG	NEG	---
Glycol		WC Method		NEG	NEG	---
Soot %	%	*ASTM D7844	>3	0.3	0.3	---
Nitration	Abs/cm	*ASTM D7624	>20	10.8	10.8	---
Sulfation	Abs/.1mm	*ASTM D7415	>30	19.4	19.5	---
Silt	scalar	*Visual	NONE	NONE	NONE	---
Debris	scalar	*Visual	NONE	NONE	NONE	---
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	---
Appearance	scalar	*Visual	NORML	NORML	NORML	---
Odor	scalar	*Visual	NORML	NORML	NORML	---
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG	---

FLUID CONDITION

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

Sodium	ppm	ASTM D5185m		2	0	---
Boron	ppm	ASTM D5185m		49	65	---
Barium	ppm	ASTM D5185m		<1	0	---
Molybdenum	ppm	ASTM D5185m		118	125	---
Manganese	ppm	ASTM D5185m		0	<1	---
Magnesium	ppm	ASTM D5185m		672	647	---
Calcium	ppm	ASTM D5185m		1278	1195	---
Phosphorus	ppm	ASTM D5185m		730	656	---
Zinc	ppm	ASTM D5185m		824	810	---
Sulfur	ppm	ASTM D5185m		3168	3702	---
Oxidation	Abs/.1mm	*ASTM D7414	>25	17.4	17.6	---
Base Number (BN)	mg KOH/g	ASTM D2896	10.7	5.6	5.5	---
Visc @ 100°C	cSt	ASTM D445	15.2	13.6	13.8	---

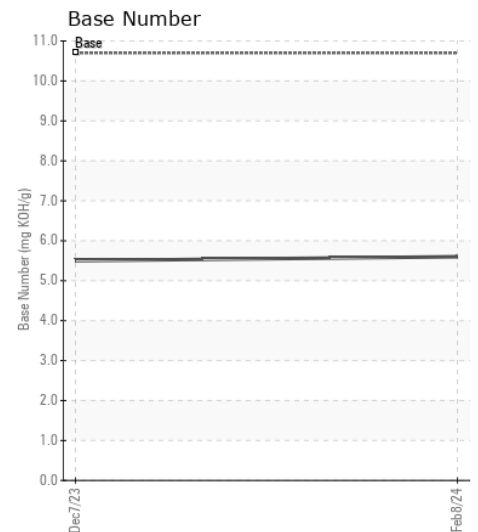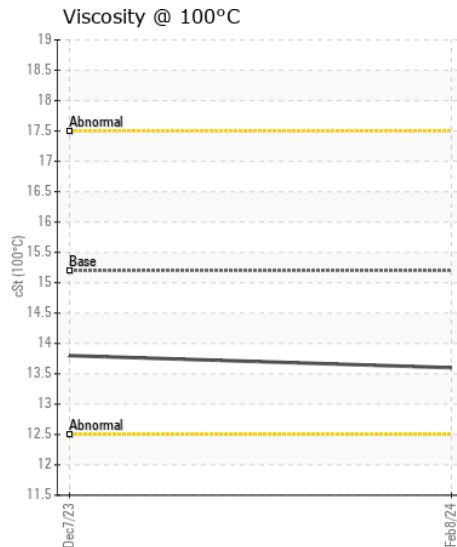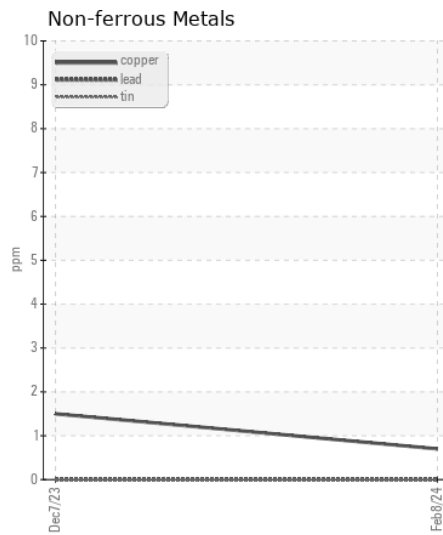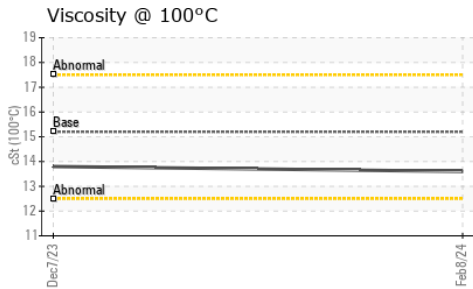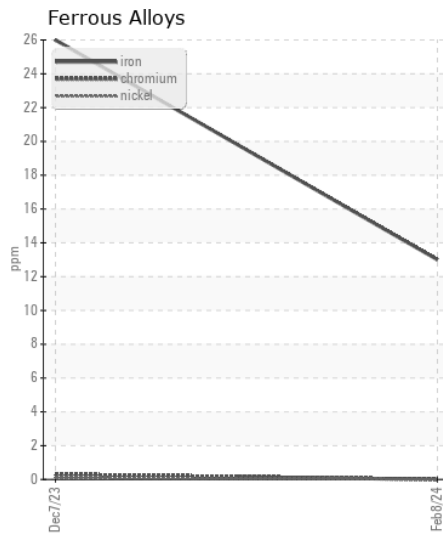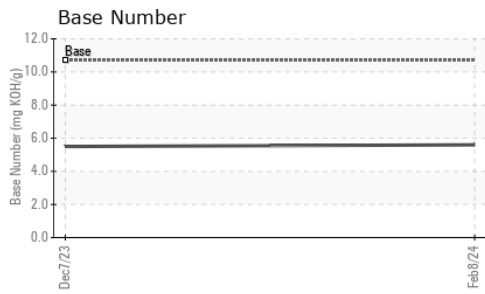

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : GFL0111341
Lab Number : 06101345
Unique Number : 10899575
Test Package : FLEET

Received : 27 Feb 2024
Tested : 28 Feb 2024
Diagnosed : 28 Feb 2024 - Wes Davis

GFL Environmental - 981 - Port Arthur Hauling
 1000 S Business Park Dr
 Port Arthur, TX
 US 77640

Contact: MICHAEL KAY
 mkay@gflenv.com
 T: (336)660-9331

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

F: