



WEAR	<b>NORMAL</b>
CONTAMINATION	<b>NORMAL</b>
FLUID CONDITION	<b>NORMAL</b>

Machine Id  
**JOHN DEERE 350P 1FF350PAJNF000368**  
 Component  
**Hydraulic System**  
 Fluid  
**HITACHI HYDRAULIC SUPER EX 46HN (--- QTS)**

### RECOMMENDATION

Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		<b>JR0204323</b>	JR0188022	JR0161956
Sample Date		Client Info		<b>22 Feb 2024</b>	26 Oct 2023	02 May 2023
Machine Age	hrs	Client Info		<b>11560</b>	1090	6892
Oil Age	hrs	Client Info		<b>11560</b>	0	500
Filter Age	hrs	Client Info		<b>0</b>	0	500
Oil Changed		Client Info		<b>Not Chngd</b>	Not Chngd	Changed
Filter Changed		Client Info		<b>Not Chngd</b>	Changed	Changed
Sample Status				<b>NORMAL</b>	NORMAL	ATTENTION

### WEAR

All component wear rates are normal.

PQ	UOM	Method	Limit/Abn	Current	History1	History2
PQ		ASTM D8184	>50	<b>16</b>	21	15
Iron	ppm	ASTM D5185m	>32	<b>0</b>	3	0
Chromium	ppm	ASTM D5185m	>9	<b>&lt;1</b>	0	0
Nickel	ppm	ASTM D5185m	>5	<b>0</b>	0	0
Titanium	ppm	ASTM D5185m		<b>0</b>	<1	0
Silver	ppm	ASTM D5185m		<b>0</b>	0	0
Aluminum	ppm	ASTM D5185m	>9	<b>0</b>	1	0
Lead	ppm	ASTM D5185m	>28	<b>0</b>	<1	0
Copper	ppm	ASTM D5185m	>50	<b>0</b>	4	0
Tin	ppm	ASTM D5185m	>5	<b>0</b>	<1	0
Vanadium	ppm	ASTM D5185m		<b>0</b>	0	0
White Metal	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE

### CONTAMINATION











The amount and size of particulates present in the system are acceptable. There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185m	>11	<b>2</b>	<1	0
Potassium	ppm	ASTM D5185m	>20	<b>0</b>	1	2
Water		WC Method	>0.075	<b>NEG</b>	NEG	NEG
Particles >4µm		ASTM D7647	>80000	<b>34223</b>	3059	30236
Particles >6µm		ASTM D7647	>20000	<b>3497</b>	487	8774
Particles >14µm		ASTM D7647	>640	<b>80</b>	24	873
Particles >21µm		ASTM D7647	>160	<b>13</b>	4	270
Particles >38µm		ASTM D7647	>40	<b>0</b>	0	40
Particles >71µm		ASTM D7647	>10	<b>0</b>	0	1
Oil Cleanliness		ISO 4406 (c)	>23/21/16	<b>22/19/13</b>	19/16/12	22/20/17
Silt	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Debris	scalar	*Visual	NONE	<b>NONE</b>	LIGHT	LIGHT
Sand/Dirt	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Appearance	scalar	*Visual	NORML	<b>NORML</b>	NORML	NORML
Odor	scalar	*Visual	NORML	<b>NORML</b>	NORML	NORML
Emulsified Water	scalar	*Visual	>0.075	<b>NEG</b>	NEG	NEG

### FLUID CONDITION

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

Sodium	ppm	ASTM D5185m	>21	<b>0</b>	0	0
Boron	ppm	ASTM D5185m		<b>0</b>	0	0
Barium	ppm	ASTM D5185m		<b>0</b>	0	0
Molybdenum	ppm	ASTM D5185m		<b>4</b>	0	4
Manganese	ppm	ASTM D5185m		<b>&lt;1</b>	0	0
Magnesium	ppm	ASTM D5185m		<b>21</b>	<1	21
Calcium	ppm	ASTM D5185m		<b>59</b>	5	24
Phosphorus	ppm	ASTM D5185m	827	<b>584</b>	603	708
Zinc	ppm	ASTM D5185m	0	<b>27</b>	55	17
Sulfur	ppm	ASTM D5185m	13	<b>67</b>	63	0
Acid Number (AN)	mg KOH/g	ASTM D8045	0.06	<b>0.08</b>	0.16	0.112
Visc @ 40°C	cSt	ASTM D445	47	<b>49.4</b>	46.3	48.3

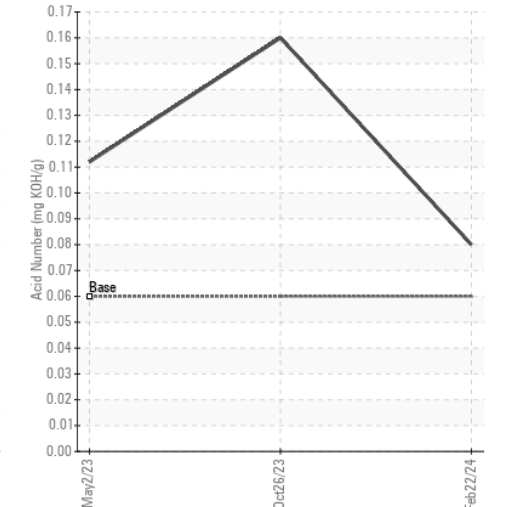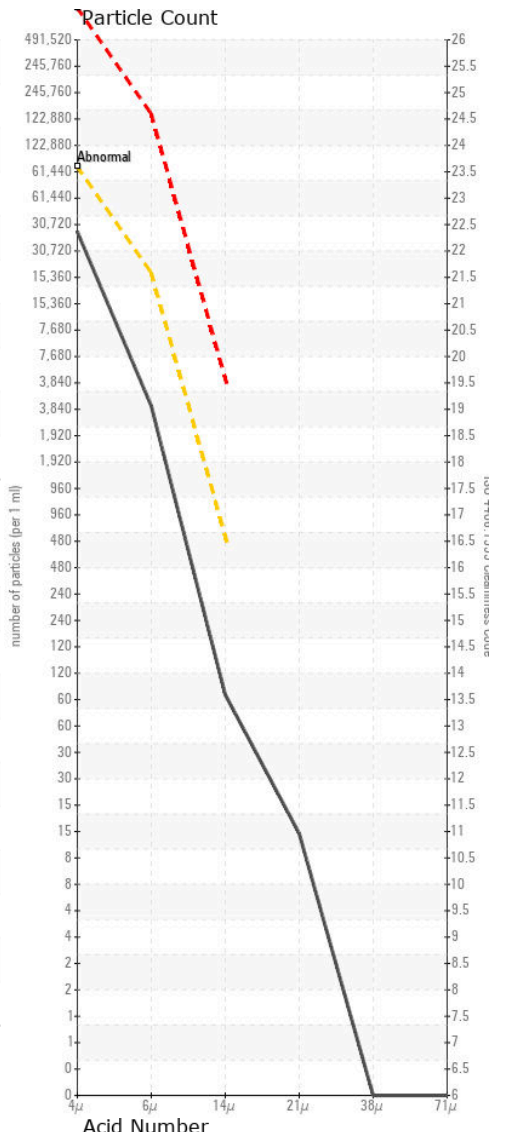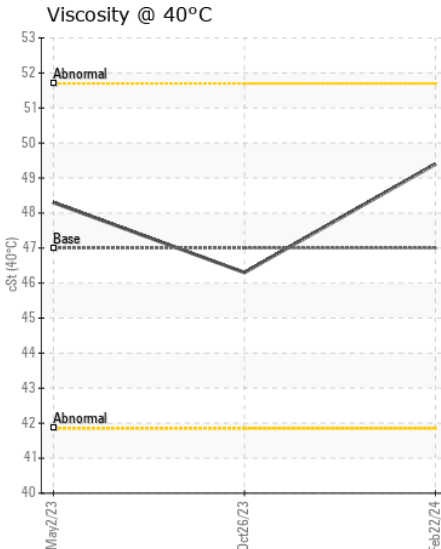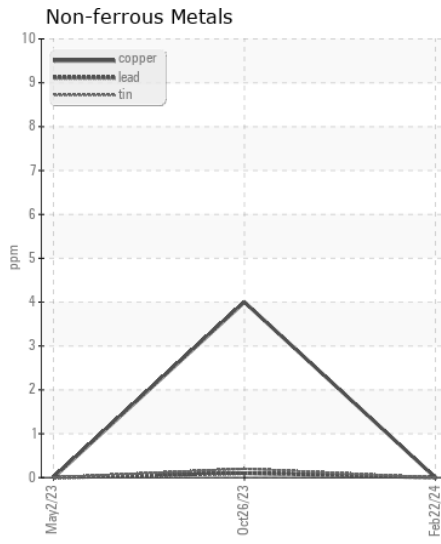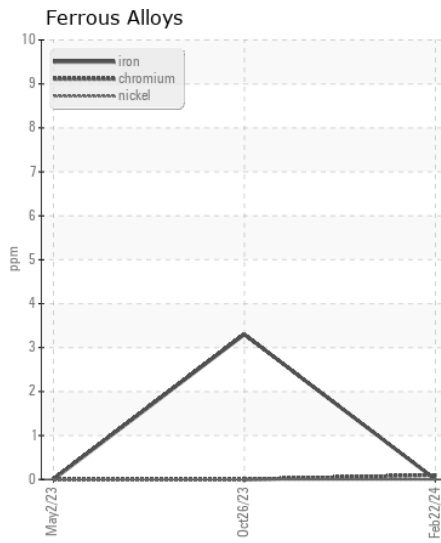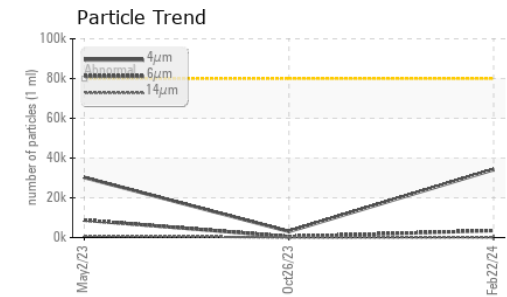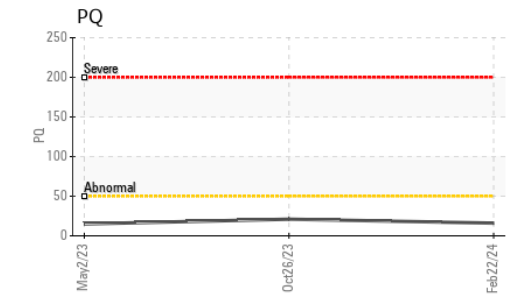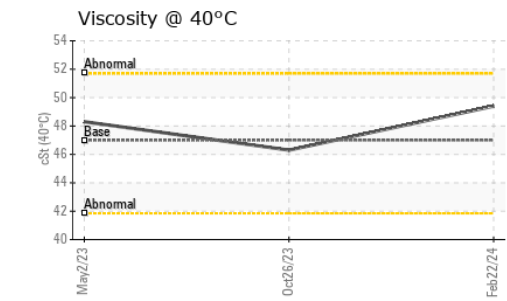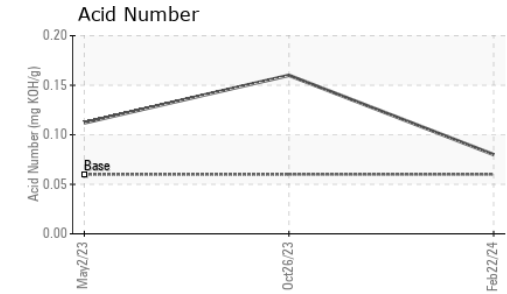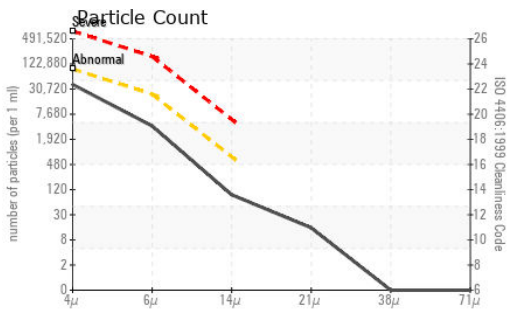

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : JR0204323 **Received** : 27 Feb 2024  
**Lab Number** : 06101519 **Tested** : 28 Feb 2024  
**Unique Number** : 10899749 **Diagnosed** : 29 Feb 2024 - Jonathan Hester  
**Test Package** : CONST ( Additional Tests: PQ )

**JRE - CHARLOTTE**  
 9550 STATESVILLE ROAD  
 CHARLOTTE, NC  
 US 28269  
 Contact: CHARLOTTE SHOP  
 myoung@jamesriverequipment.com  
 T: (704)597-0211  
 F: (704)596-6198

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)