



| | |
|-----------------|-----------|
| WEAR | NORMAL |
| CONTAMINATION | NORMAL |
| FLUID CONDITION | ATTENTION |

Machine Id
1FF250GXVNF612072

Component
Pump Drive

Fluid
JOHN DEERE ENGINE OIL PLUS 50 II 15W40 (--- GAL)

RECOMMENDATION

Resample at the next service interval to monitor.

| Test | UOM | Method | Limit/Abn | Current | History1 | History2 |
|----------------|-----|-------------|-----------|-------------|-------------|----------|
| Sample Number | | Client Info | | JR0192749 | JR0189197 | --- |
| Sample Date | | Client Info | | 20 Feb 2024 | 03 Oct 2023 | --- |
| Machine Age | hrs | Client Info | | 514 | 514 | --- |
| Oil Age | hrs | Client Info | | 514 | 514 | --- |
| Filter Age | hrs | Client Info | | 0 | 0 | --- |
| Oil Changed | | Client Info | | Changed | Not Changd | --- |
| Filter Changed | | Client Info | | N/A | Not Changd | --- |
| Sample Status | | | | ATTENTION | NORMAL | --- |

WEAR

All component wear rates are normal.

| PQ | UOM | Method | Limit/Abn | Current | History1 | History2 |
|--------------|--------|-------------|-----------|---------|----------|----------|
| PQ | | ASTM D8184 | | 13 | 11 | --- |
| Iron | ppm | ASTM D5185m | >500 | 59 | 51 | --- |
| Chromium | ppm | ASTM D5185m | >15 | <1 | 1 | --- |
| Nickel | ppm | ASTM D5185m | >10 | 0 | 0 | --- |
| Titanium | ppm | ASTM D5185m | | <1 | <1 | --- |
| Silver | ppm | ASTM D5185m | | 0 | 0 | --- |
| Aluminum | ppm | ASTM D5185m | >20 | 2 | <1 | --- |
| Lead | ppm | ASTM D5185m | | 0 | <1 | --- |
| Copper | ppm | ASTM D5185m | >35 | <1 | 1 | --- |
| Tin | ppm | ASTM D5185m | >4 | <1 | <1 | --- |
| Vanadium | ppm | ASTM D5185m | | 0 | <1 | --- |
| White Metal | scalar | *Visual | NONE | NONE | NONE | --- |
| Yellow Metal | scalar | *Visual | NONE | NONE | NONE | --- |

CONTAMINATION








There is no indication of any contamination in the oil.

| Test | UOM | Method | Limit/Abn | Current | History1 | History2 |
|------------------|--------|-------------|-----------|---------|----------|----------|
| Silicon | ppm | ASTM D5185m | >75 | 12 | 11 | --- |
| Potassium | ppm | ASTM D5185m | >20 | 1 | <1 | --- |
| Water | | WC Method | >0.2 | NEG | NEG | --- |
| Silt | scalar | *Visual | NONE | NONE | NONE | --- |
| Debris | scalar | *Visual | NONE | NONE | NONE | --- |
| Sand/Dirt | scalar | *Visual | NONE | NONE | NONE | --- |
| Appearance | scalar | *Visual | NORML | NORML | NORML | --- |
| Odor | scalar | *Visual | NORML | NORML | NORML | --- |
| Emulsified Water | scalar | *Visual | >0.2 | NEG | NEG | --- |

FLUID CONDITION

The oil viscosity is lower than normal. This plus the additive levels indicates the addition of a different brand, or type of oil. Confirm oil type.

| Test | UOM | Method | Limit/Abn | Current | History1 | History2 |
|-------------|-----|-------------|-----------|---------|----------|----------|
| Sodium | ppm | ASTM D5185m | | 4 | 4 | --- |
| Boron | ppm | ASTM D5185m | | 60 | 69 | --- |
| Barium | ppm | ASTM D5185m | | 5 | 0 | --- |
| Molybdenum | ppm | ASTM D5185m | | 104 | 105 | --- |
| Manganese | ppm | ASTM D5185m | | 2 | 2 | --- |
| Magnesium | ppm | ASTM D5185m | | 17 | 15 | --- |
| Calcium | ppm | ASTM D5185m | | 4067 | 3958 | --- |
| Phosphorus | ppm | ASTM D5185m | | 1251 | 1155 | --- |
| Zinc | ppm | ASTM D5185m | | 1349 | 1306 | --- |
| Sulfur | ppm | ASTM D5185m | | 7915 | 8054 | --- |
| Visc @ 40°C | cSt | ASTM D445 | 117 | 61.6 | 61.1 | --- |

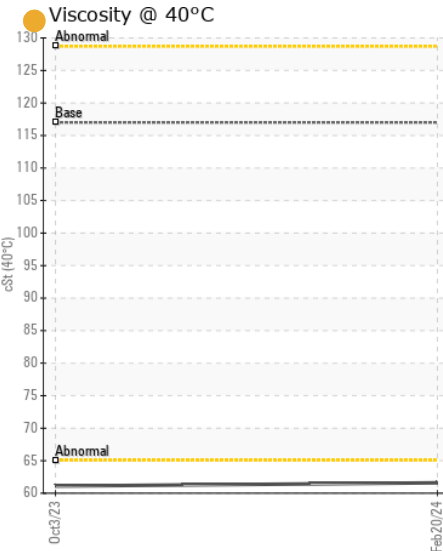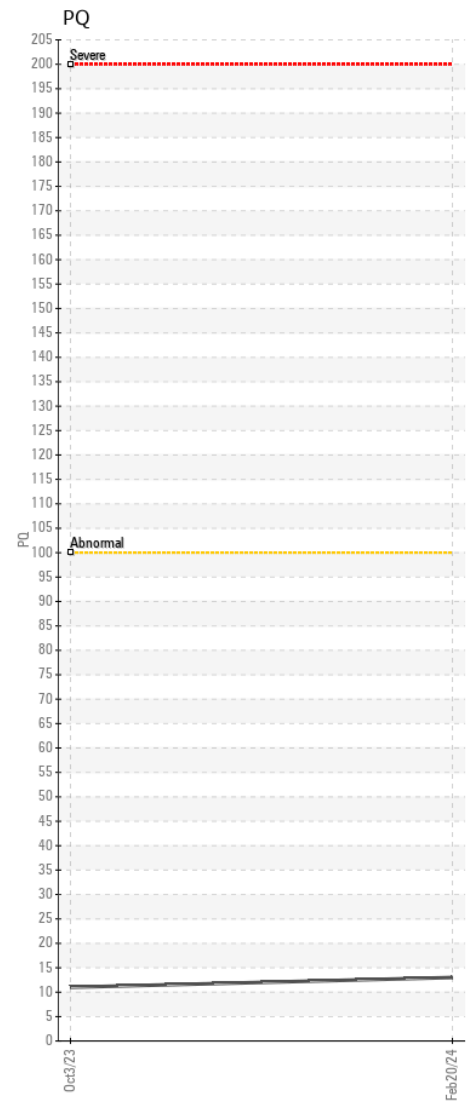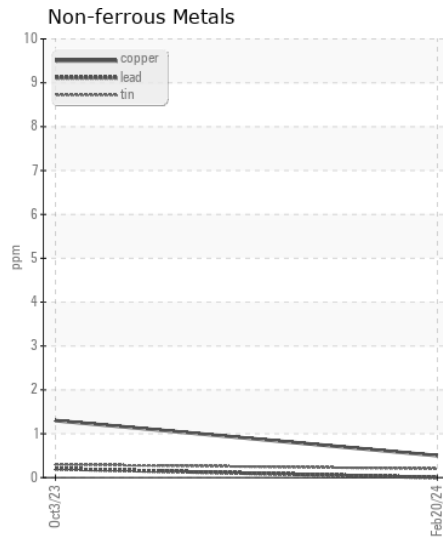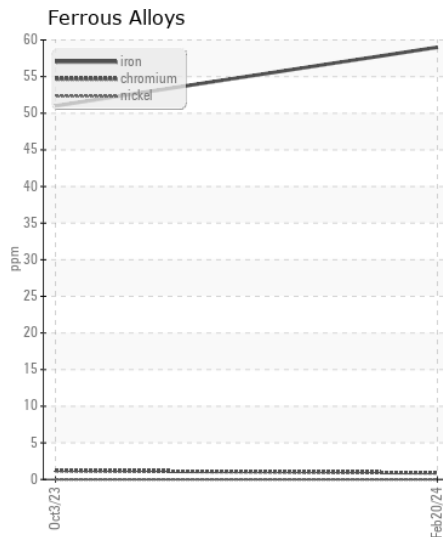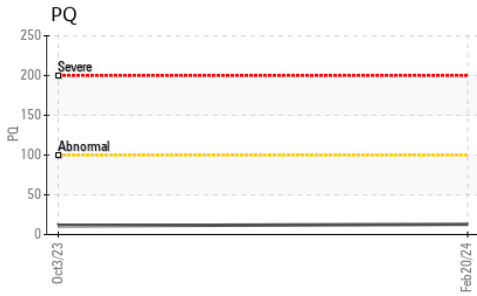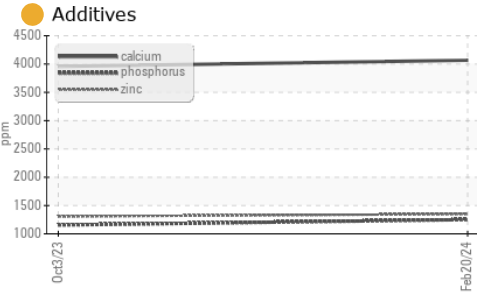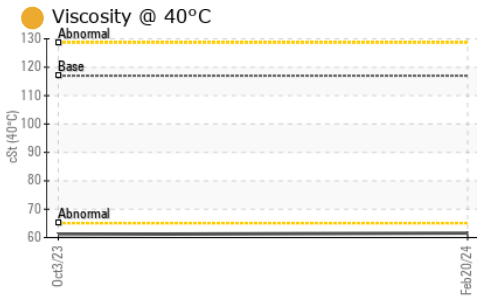

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : JR0192749 **Received** : 27 Feb 2024
Lab Number : 06101934 **Tested** : 28 Feb 2024
Unique Number : 10900164 **Diagnosed** : 29 Feb 2024 - Sean Felton
Test Package : CONST (Additional Tests: PQ)

JRE - CHARLOTTE
 9550 STATESVILLE ROAD
 CHARLOTTE, NC
 US 28269

Contact: CHARLOTTE SHOP
 myoung@jamesriverequipment.com

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T: (704)597-0211
 F: (704)596-6198