



WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL

Machine Id
JOHN DEERE 350P 1FF350PAJNF000368

Component
Left Final Drive

Fluid
JOHN DEERE GL-5 80W90 (--- QTS)

RECOMMENDATION

Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		JR0204325	JR0188029	JR0161964
Sample Date		Client Info		22 Feb 2024	26 Oct 2023	02 May 2023
Machine Age	hrs	Client Info		11560	1090	6892
Oil Age	hrs	Client Info		11560	0	500
Filter Age	hrs	Client Info		0	0	500
Oil Changed		Client Info		Not Changd	Not Changd	Changed
Filter Changed		Client Info		N/A	N/A	Changed
Sample Status				NORMAL	NORMAL	NORMAL

WEAR

All component wear rates are normal.

PQ		ASTM D8184	>1250	14	38	12
Iron	ppm	ASTM D5185m	>750	0	61	<1
Chromium	ppm	ASTM D5185m	>9	0	<1	0
Nickel	ppm	ASTM D5185m	>10	0	0	0
Titanium	ppm	ASTM D5185m		0	<1	0
Silver	ppm	ASTM D5185m		0	0	0
Aluminum	ppm	ASTM D5185m	>40	0	0	0
Lead	ppm	ASTM D5185m	>15	0	0	0
Copper	ppm	ASTM D5185m	>40	0	<1	0
Tin	ppm	ASTM D5185m	>10	0	0	0
Vanadium	ppm	ASTM D5185m		0	0	0
White Metal	scalar	*Visual	NONE	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	NONE

CONTAMINATION







There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185m	>75	1	13	<1
Potassium	ppm	ASTM D5185m	>20	<1	<1	<1
Water		WC Method	>0.075	NEG	NEG	NEG
Silt	scalar	*Visual	NONE	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.075	NEG	NEG	NEG

FLUID CONDITION

The condition of the oil is acceptable for the time in service.

Sodium	ppm	ASTM D5185m	>51	0	1	0
Boron	ppm	ASTM D5185m		4	86	48
Barium	ppm	ASTM D5185m		0	0	0
Molybdenum	ppm	ASTM D5185m		2	1	0
Manganese	ppm	ASTM D5185m		0	2	0
Magnesium	ppm	ASTM D5185m		18	0	<1
Calcium	ppm	ASTM D5185m		22	48	5
Phosphorus	ppm	ASTM D5185m		328	484	969
Zinc	ppm	ASTM D5185m		3	22	3
Sulfur	ppm	ASTM D5185m		18180	14580	22900
Visc @ 40°C	cSt	ASTM D445		142	186	146

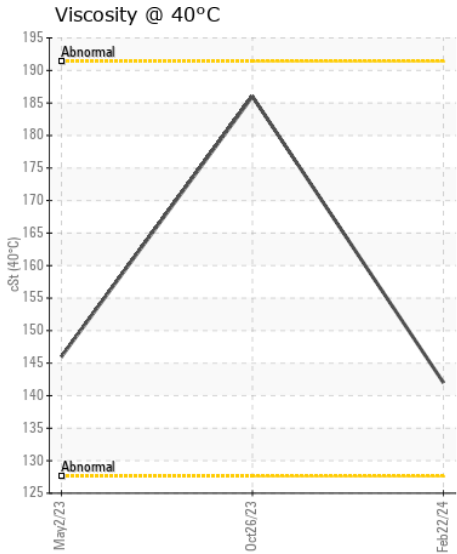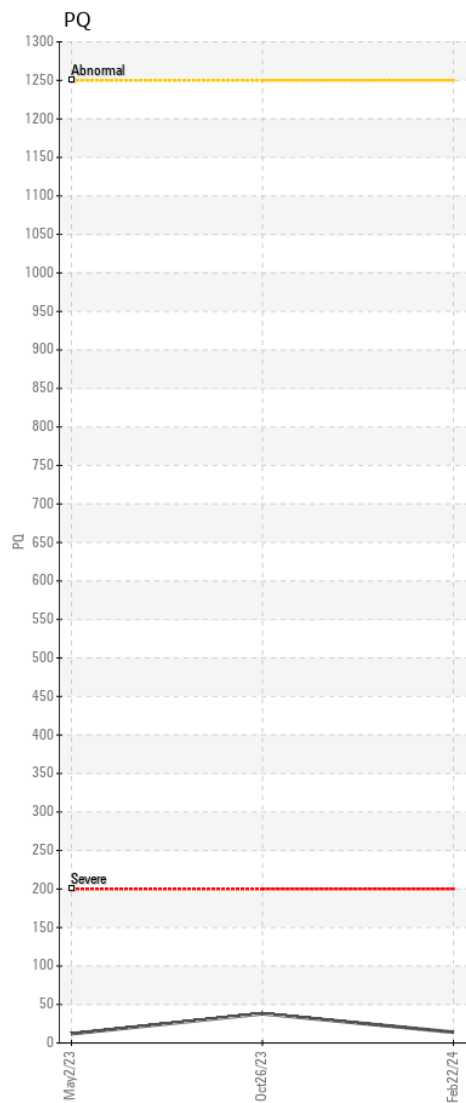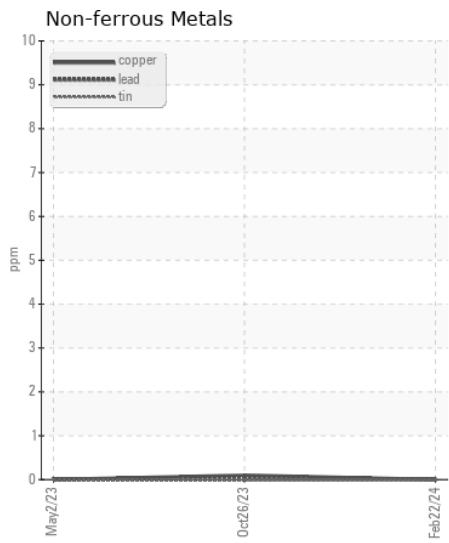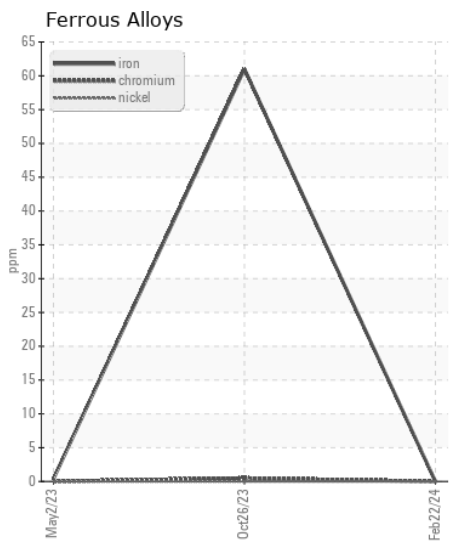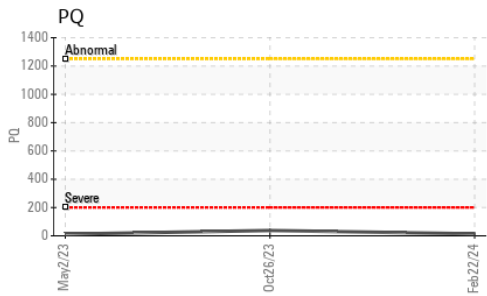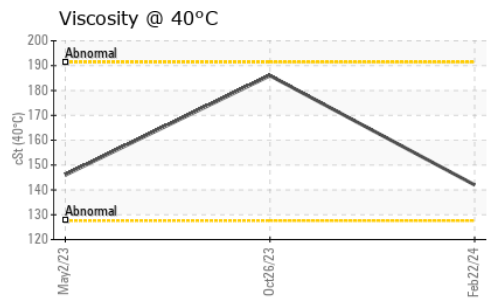

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : JR0204325 **Received** : 27 Feb 2024
Lab Number : 06101941 **Tested** : 28 Feb 2024
Unique Number : 10900171 **Diagnosed** : 29 Feb 2024 - Sean Felton
Test Package : CONST (Additional Tests: PQ)

JRE - CHARLOTTE
 9550 STATESVILLE ROAD
 CHARLOTTE, NC
 US 28269
 Contact: CHARLOTTE SHOP
 myoung@jamesriverequipment.com
 T: (704)597-0211
 F: (704)596-6198

To discuss this sample report, contact Customer Service at 1-800-237-1369.
 * - Denotes test methods that are outside of the ISO 17025 scope of accreditation.
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)