



OIL ANALYSIS REPORT

WEAR	SEVERE
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL

Area
[SPM674034]
 Machine Id
SENNEBOGEN 835E 835.0.3239
 Component
Front Right Final Drive
 Fluid
GEAR OIL SAE 80W90 (--- GAL)

RECOMMENDATION

The oil change at the time of sampling has been noted. We recommend an early resample to monitor this condition.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		VCP429207	---	---
Sample Date		Client Info		15 Feb 2024	---	---
Machine Age	hrs	Client Info		991	---	---
Oil Age	hrs	Client Info		0	---	---
Filter Age	hrs	Client Info		0	---	---
Oil Changed		Client Info		Changed	---	---
Filter Changed		Client Info		Not Changed	---	---
Sample Status				SEVERE	---	---

WEAR

The copper level is severe. Moderate concentration of visible metal present.

Iron	ppm	ASTM D5185m	>500	275	---	---
Chromium	ppm	ASTM D5185m	>10	1	---	---
Nickel	ppm	ASTM D5185m	>10	<1	---	---
Titanium	ppm	ASTM D5185m		<1	---	---
Silver	ppm	ASTM D5185m		0	---	---
Aluminum	ppm	ASTM D5185m	>25	12	---	---
Lead	ppm	ASTM D5185m	>25	2	---	---
Copper	ppm	ASTM D5185m	>50	▲ 503	---	---
Tin	ppm	ASTM D5185m	>10	<1	---	---
Vanadium	ppm	ASTM D5185m		0	---	---
White Metal	scalar	*Visual	NONE	NONE	---	---
Yellow Metal	scalar	*Visual	NONE	▲ MODER	---	---

CONTAMINATION











There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185m	>75	3	---	---
Potassium	ppm	ASTM D5185m	>20	2	---	---
Water		WC Method	>0.2	NEG	---	---
Silt	scalar	*Visual	NONE	NONE	---	---
Debris	scalar	*Visual	NONE	NONE	---	---
Sand/Dirt	scalar	*Visual	NONE	NONE	---	---
Appearance	scalar	*Visual	NORML	NORML	---	---
Odor	scalar	*Visual	NORML	NORML	---	---
Emulsified Water	scalar	*Visual	>0.2	NEG	---	---

FLUID CONDITION

The condition of the oil is acceptable for the time in service.

Sodium	ppm	ASTM D5185m	>170	10	---	---
Boron	ppm	ASTM D5185m	400	88	---	---
Barium	ppm	ASTM D5185m	200	5	---	---
Molybdenum	ppm	ASTM D5185m	12	0	---	---
Manganese	ppm	ASTM D5185m		20	---	---
Magnesium	ppm	ASTM D5185m	12	2	---	---
Calcium	ppm	ASTM D5185m	150	19	---	---
Phosphorus	ppm	ASTM D5185m	1650	1836	---	---
Zinc	ppm	ASTM D5185m	125	321	---	---
Sulfur	ppm	ASTM D5185m	22500	30783	---	---
Visc @ 40°C	cSt	ASTM D445	143	139	---	---

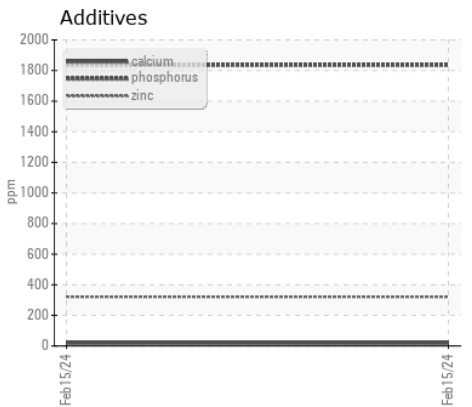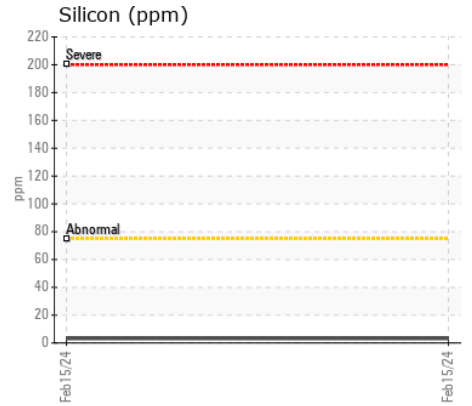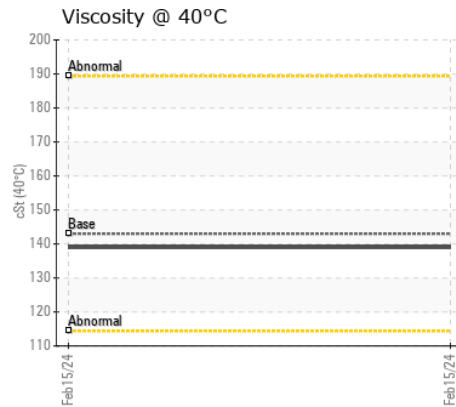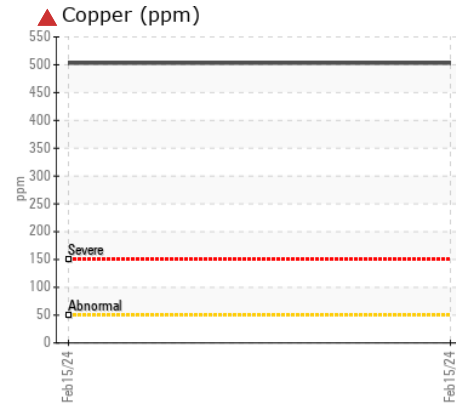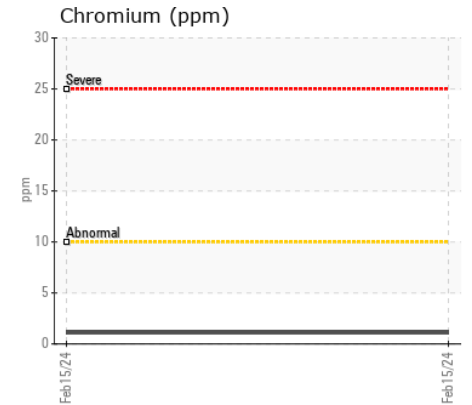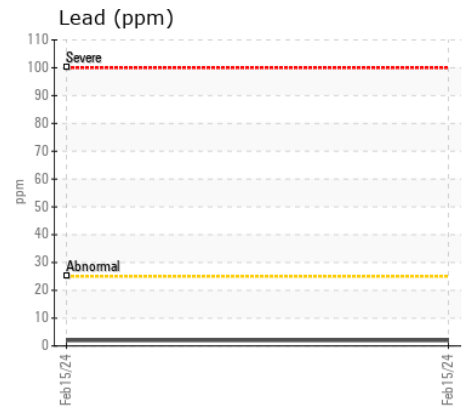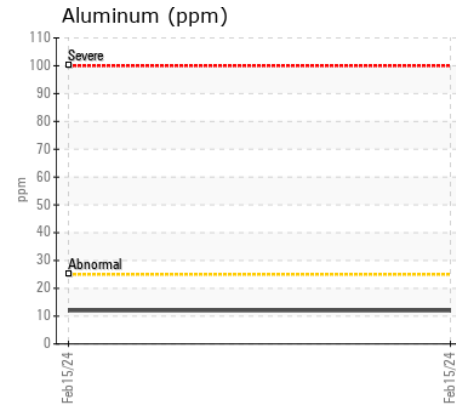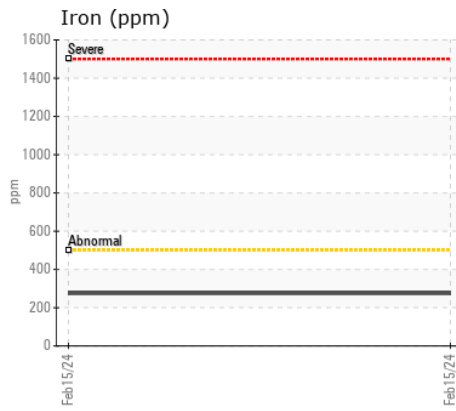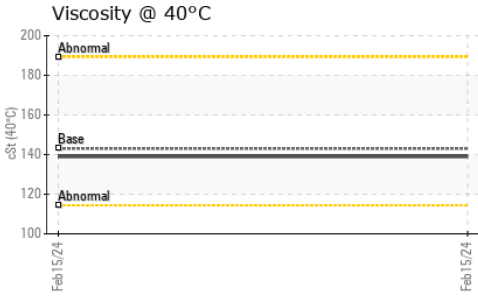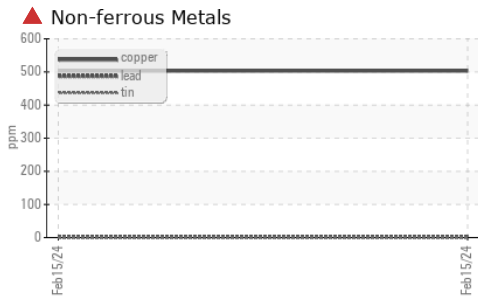

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513

Sample No. : VCP429207

Lab Number : 06101991

Unique Number : 10900221

Test Package : MOB 1

Received : 27 Feb 2024

Tested : 28 Feb 2024

Diagnosed : 29 Feb 2024 - Jonathan Hester

BELSON STEEL

1685 N STATE RTE 50

BOURBONNAIS, IL

US 60914

Contact: M. POZAN

mpozan@belsonsteel.com

T: (815)932-7416

F:

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)