



VOLVO

OIL ANALYSIS REPORT

WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL

Area
[SPM673743]
 Machine Id
SENNEBOGEN 835ME 835.0.2845
 Component
Rear Right Final Drive
 Fluid
GEAR OIL SAE 80W90 (--- GAL)

RECOMMENDATION

Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		VCP437149	VCP433171	VCP406644
Sample Date		Client Info		07 Feb 2024	10 Nov 2023	04 Aug 2023
Machine Age	hrs	Client Info		6681	6152	5542
Oil Age	hrs	Client Info		0	0	0
Filter Age	hrs	Client Info		0	0	0
Oil Changed		Client Info		Not Changed	Changed	Not Changed
Filter Changed		Client Info		Not Changed	Not Changed	Not Changed
Sample Status				NORMAL	NORMAL	NORMAL

WEAR

All component wear rates are normal.

Iron	ppm	ASTM D5185m	>500	54	46	40
Chromium	ppm	ASTM D5185m	>10	0	0	<1
Nickel	ppm	ASTM D5185m	>10	0	0	<1
Titanium	ppm	ASTM D5185m		<1	<1	2
Silver	ppm	ASTM D5185m		0	0	0
Aluminum	ppm	ASTM D5185m	>25	0	0	<1
Lead	ppm	ASTM D5185m	>25	0	0	0
Copper	ppm	ASTM D5185m	>50	10	11	10
Tin	ppm	ASTM D5185m	>10	<1	0	<1
Vanadium	ppm	ASTM D5185m		0	<1	0
White Metal	scalar	*Visual	NONE	NONE	NONE	MODER
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	NONE

CONTAMINATION










There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185m	>75	4	4	5
Potassium	ppm	ASTM D5185m	>20	<1	6	<1
Water		WC Method	>0.2	NEG	NEG	NEG
Silt	scalar	*Visual	NONE	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG	NEG

FLUID CONDITION

The condition of the oil is acceptable for the time in service.

Sodium	ppm	ASTM D5185m	>170	<1	3	0
Boron	ppm	ASTM D5185m	400	5	4	3
Barium	ppm	ASTM D5185m	200	0	0	2
Molybdenum	ppm	ASTM D5185m	12	0	0	<1
Manganese	ppm	ASTM D5185m		<1	<1	<1
Magnesium	ppm	ASTM D5185m	12	4	0	5
Calcium	ppm	ASTM D5185m	150	99	98	148
Phosphorus	ppm	ASTM D5185m	1650	480	467	470
Zinc	ppm	ASTM D5185m	125	37	39	72
Sulfur	ppm	ASTM D5185m	22500	17113	16744	18842
Visc @ 40°C	cSt	ASTM D445	143	140	138	143

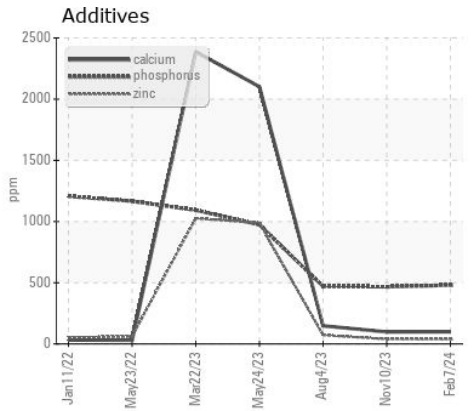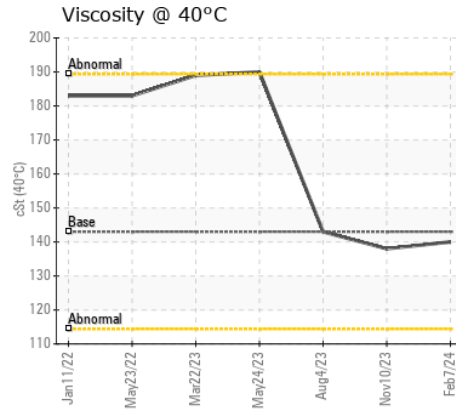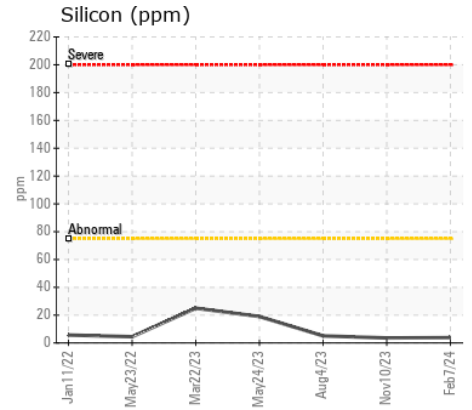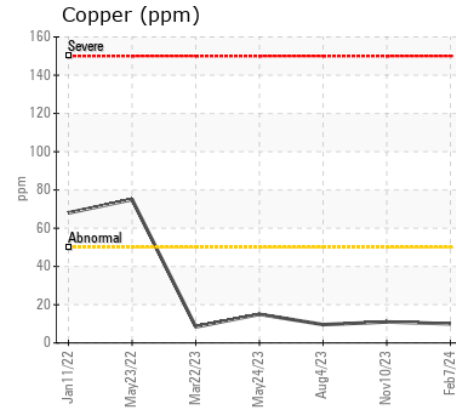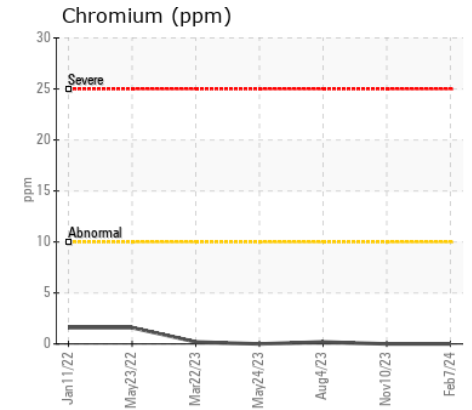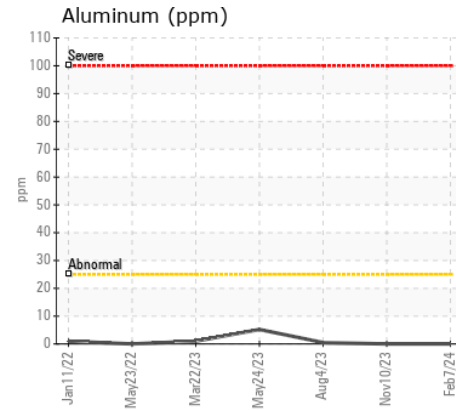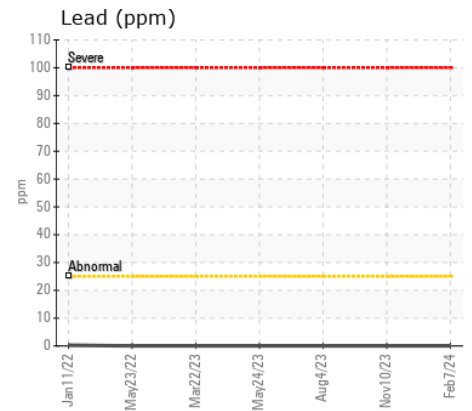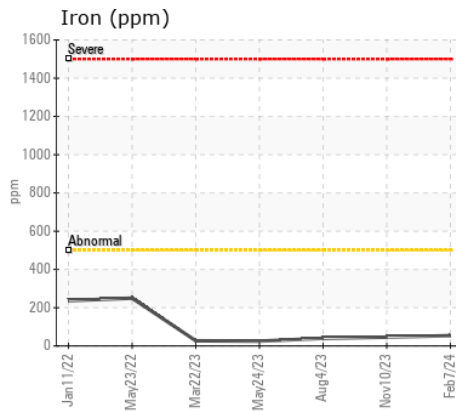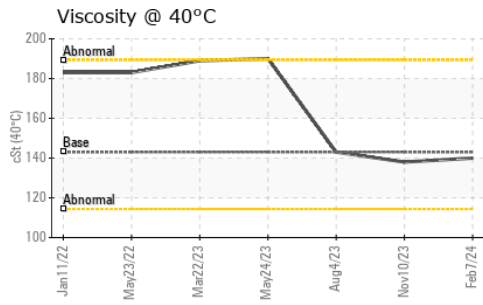

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513

Sample No. : VCP437149

Lab Number : 06102000

Unique Number : 10900230

Test Package : MOB 1

Received : 27 Feb 2024

Tested : 28 Feb 2024

Diagnosed : 28 Feb 2024 - Wes Davis

BELSON STEEL

1685 N STATE RTE 50

BOURBONNAIS, IL

US 60914

Contact: M. POZAN

mpozan@belsonsteel.com

T: (815)932-7416

F:

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)