



# ASCENDUM

## OIL ANALYSIS REPORT



Area  
**Ascendum Machinery**  
Machine Id  
**VOLVO L110H 632053**  
Component  
**Front Axle**  
Fluid  
**VOLVO WB 102 (--- GAL)**

WEAR	<b>NORMAL</b>
CONTAMINATION	<b>NORMAL</b>
FLUID CONDITION	<b>NORMAL</b>

### RECOMMENDATION

Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		<b>ASC0007669</b>	ASC0000183	---
Sample Date		Client Info		<b>22 Feb 2024</b>	15 Jun 2023	---
Machine Age	hrs	Client Info		<b>6707</b>	5016	---
Oil Age	hrs	Client Info		<b>1691</b>	5016	---
Filter Age	hrs	Client Info		<b>0</b>	0	---
Oil Changed		Client Info		<b>Not Changed</b>	Changed	---
Filter Changed		Client Info		<b>None</b>	N/A	---
Sample Status				<b>NORMAL</b>	NORMAL	---

### WEAR

All component wear rates are normal.

Iron	ppm	ASTM D5185m	>500	<b>48</b>	136	---
Chromium	ppm	ASTM D5185m	>20	<b>&lt;1</b>	3	---
Nickel	ppm	ASTM D5185m	>10	<b>0</b>	<1	---
Titanium	ppm	ASTM D5185m		<b>0</b>	<1	---
Silver	ppm	ASTM D5185m		<b>0</b>	0	---
Aluminum	ppm	ASTM D5185m	>30	<b>&lt;1</b>	<1	---
Lead	ppm	ASTM D5185m	>50	<b>0</b>	<1	---
Copper	ppm	ASTM D5185m	>120	<b>0</b>	<1	---
Tin	ppm	ASTM D5185m	>20	<b>&lt;1</b>	<1	---
Vanadium	ppm	ASTM D5185m		<b>0</b>	<1	---
White Metal	scalar	*Visual	NONE	<b>NONE</b>	NONE	---
Yellow Metal	scalar	*Visual	NONE	<b>NONE</b>	NONE	---

### CONTAMINATION





There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185m	>50	<b>15</b>	13	---
Potassium	ppm	ASTM D5185m	>20	<b>0</b>	0	---
Water		WC Method	>0.2	<b>NEG</b>	NEG	---
Silt	scalar	*Visual	NONE	<b>NONE</b>	MODER	---
Debris	scalar	*Visual	NONE	<b>NONE</b>	NONE	---
Sand/Dirt	scalar	*Visual	NONE	<b>NONE</b>	NONE	---
Appearance	scalar	*Visual	NORML	<b>NORML</b>	NORML	---
Odor	scalar	*Visual	NORML	<b>NORML</b>	NORML	---
Emulsified Water	scalar	*Visual	>0.2	<b>NEG</b>	NEG	---

### FLUID CONDITION

The condition of the oil is acceptable for the time in service.

Sodium	ppm	ASTM D5185m		<b>2</b>	4	---
Boron	ppm	ASTM D5185m		<b>113</b>	143	---
Barium	ppm	ASTM D5185m		<b>0</b>	0	---
Molybdenum	ppm	ASTM D5185m		<b>5</b>	4	---
Manganese	ppm	ASTM D5185m		<b>2</b>	5	---
Magnesium	ppm	ASTM D5185m		<b>38</b>	14	---
Calcium	ppm	ASTM D5185m		<b>3292</b>	4125	---
Phosphorus	ppm	ASTM D5185m		<b>1093</b>	1323	---
Zinc	ppm	ASTM D5185m		<b>1356</b>	1643	---
Sulfur	ppm	ASTM D5185m		<b>3219</b>	4567	---
Visc @ 40°C	cSt	ASTM D445	55	<b>50.8</b>	41.9	---

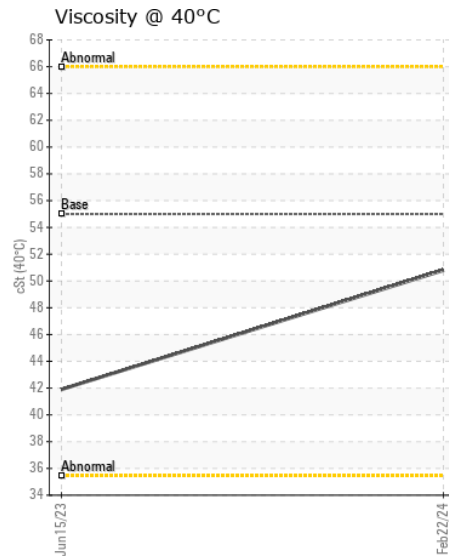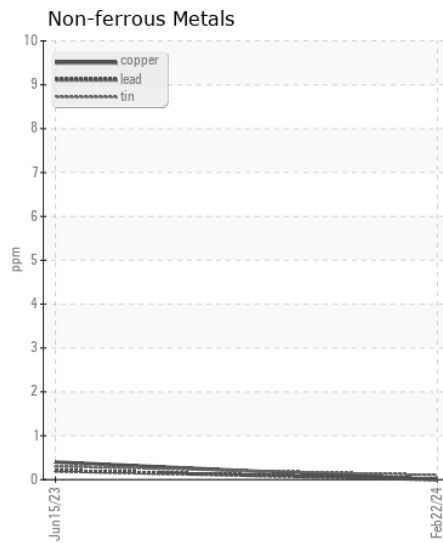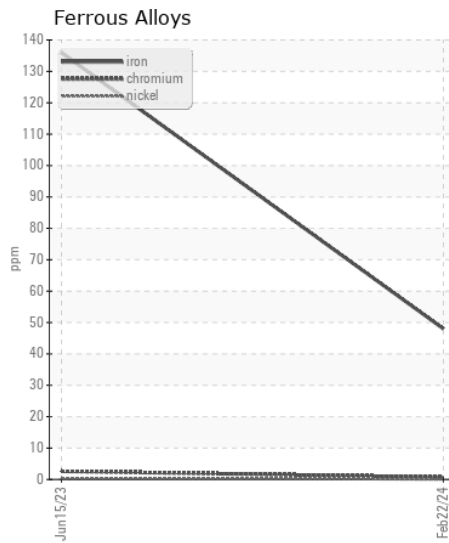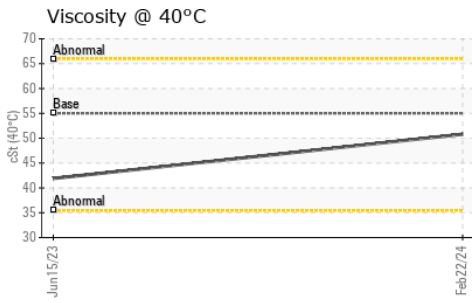

Certificate L2367

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : ASC0007669  
**Lab Number** : 06102079  
**Unique Number** : 10900309  
**Test Package** : CONST

**Received** : 27 Feb 2024  
**Tested** : 28 Feb 2024  
**Diagnosed** : 28 Feb 2024 - Wes Davis

**PALLET EXPRESS INC**  
 6306 OLD 421 RD  
 LIBERTY, NC  
 US 27298  
 Contact: Service Manager

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T:  
F: