



# VOLVO

## OIL ANALYSIS REPORT

WEAR	<b>NORMAL</b>
CONTAMINATION	<b>ABNORMAL</b>
FLUID CONDITION	<b>NORMAL</b>



Machine Id  
**VOLVO A40G 352778**  
Component  
**Transmission (Auto)**  
Fluid  
**VOLVO AT 102 (--- GAL)**

### RECOMMENDATION

No corrective action is recommended at this time. Resample at the next service interval to monitor.

### WEAR

All component wear rates are normal.










### CONTAMINATION

Moderate concentration of visible dirt/debris present in the fluid.

### FLUID CONDITION

The condition of the fluid is acceptable for the time in service.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		<b>VCP436714</b>	VCP412491	---
Sample Date		Client Info		<b>20 Feb 2024</b>	18 Oct 2023	---
Machine Age	hrs	Client Info		<b>4770</b>	4162	---
Oil Age	hrs	Client Info		<b>0</b>	0	---
Filter Age	hrs	Client Info		<b>0</b>	0	---
Oil Changed		Client Info		<b>Not Changed</b>	Not Changed	---
Filter Changed		Client Info		<b>Changed</b>	Not Changed	---
Sample Status				<b>ABNORMAL</b>	ABNORMAL	---
Iron	ppm	ASTM D5185m	>160	<b>76</b>	93	---
Chromium	ppm	ASTM D5185m	>5	<b>&lt;1</b>	0	---
Nickel	ppm	ASTM D5185m	>5	<b>7</b>	7	---
Titanium	ppm	ASTM D5185m		<b>&lt;1</b>	<1	---
Silver	ppm	ASTM D5185m	>5	<b>0</b>	0	---
Aluminum	ppm	ASTM D5185m	>50	<b>37</b>	32	---
Lead	ppm	ASTM D5185m	>50	<b>&lt;1</b>	0	---
Copper	ppm	ASTM D5185m	>225	<b>41</b>	53	---
Tin	ppm	ASTM D5185m	>10	<b>8</b>	7	---
Vanadium	ppm	ASTM D5185m		<b>&lt;1</b>	0	---
White Metal	scalar	*Visual	NONE	<b>NONE</b>	<b>▲ HEAVY</b>	---
Yellow Metal	scalar	*Visual	NONE	<b>NONE</b>	NONE	---
Silicon	ppm	ASTM D5185m	>20	<b>17</b>	15	---
Potassium	ppm	ASTM D5185m	>20	<b>5</b>	3	---
Water		WC Method	>0.1	<b>NEG</b>	NEG	---
Silt	scalar	*Visual	NONE	<b>NONE</b>	NONE	---
Debris	scalar	*Visual	NONE	<b>▲ MODER</b>	NONE	---
Sand/Dirt	scalar	*Visual	NONE	<b>NONE</b>	NONE	---
Appearance	scalar	*Visual	NORML	<b>NORML</b>	NORML	---
Odor	scalar	*Visual	NORML	<b>NORML</b>	NORML	---
Emulsified Water	scalar	*Visual	>0.1	<b>NEG</b>	NEG	---
Sodium	ppm	ASTM D5185m		<b>5</b>	8	---
Boron	ppm	ASTM D5185m	187	<b>61</b>	56	---
Barium	ppm	ASTM D5185m	0.0	<b>2</b>	0	---
Molybdenum	ppm	ASTM D5185m	0.0	<b>&lt;1</b>	0	---
Manganese	ppm	ASTM D5185m	0.0	<b>6</b>	6	---
Magnesium	ppm	ASTM D5185m	6.8	<b>2</b>	12	---
Calcium	ppm	ASTM D5185m	215	<b>70</b>	102	---
Phosphorus	ppm	ASTM D5185m	445	<b>171</b>	203	---
Zinc	ppm	ASTM D5185m	56	<b>14</b>	64	---
Sulfur	ppm	ASTM D5185m	1336	<b>1858</b>	1871	---
Visc @ 40°C	cSt	ASTM D445	35.3	<b>30.3</b>	27.6	---

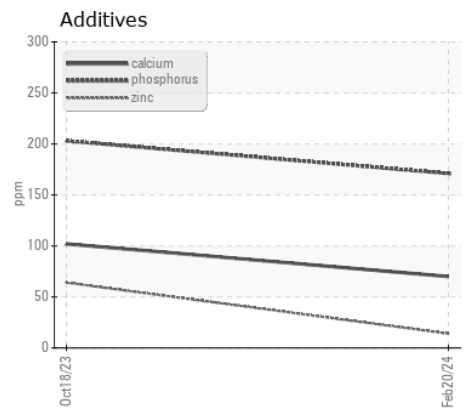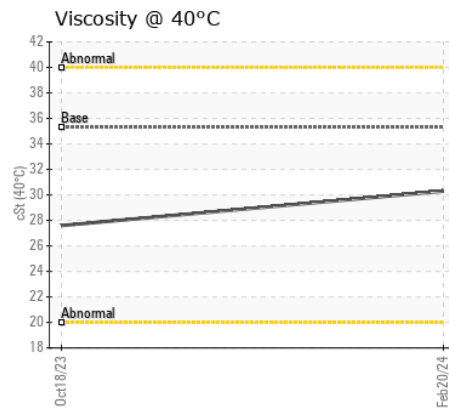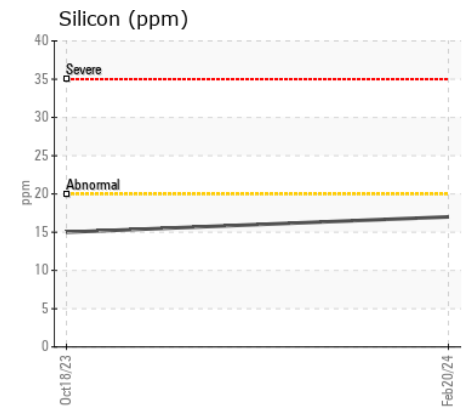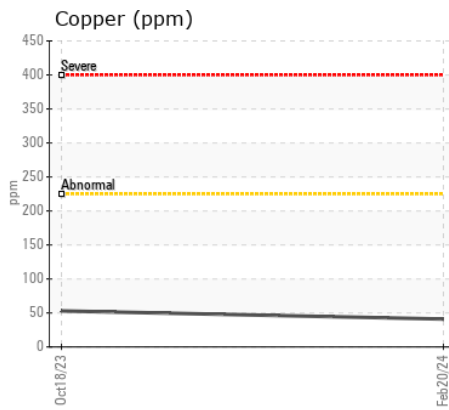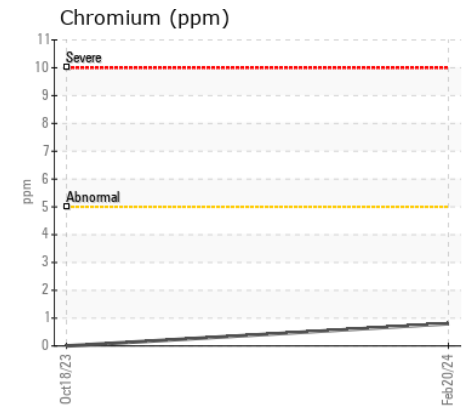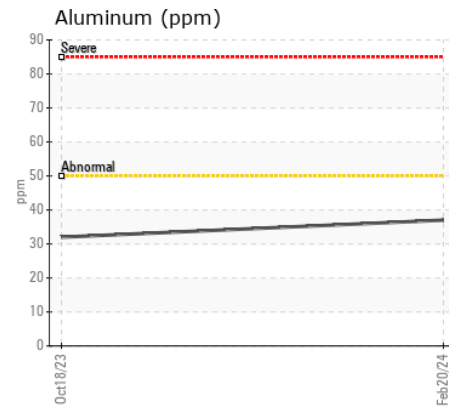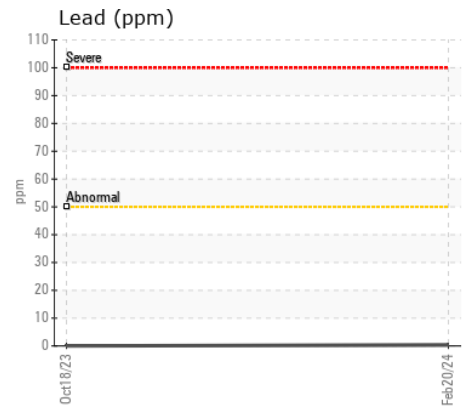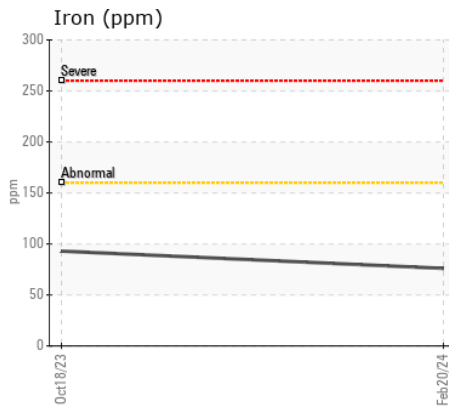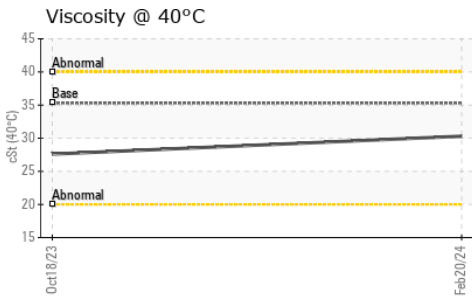

Certificate L2367

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : VCP436714  
**Lab Number** : 06102105  
**Unique Number** : 10900335  
**Test Package** : MOB 1

**Received** : 27 Feb 2024  
**Tested** : 28 Feb 2024  
**Diagnosed** : 29 Feb 2024 - Jonathan Hester

**ALTA EQUIPMENT COMPANY**  
 5151 DR MARTIN LUTHER KING BLVD  
 FORT MYERS, FL  
 US 33905  
 Contact: TODD LARK  
 tlark@altaequipfl.com

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T:  
 F: (239)481-3302