



PacLease

# OIL ANALYSIS REPORT

WEAR	<b>NORMAL</b>
CONTAMINATION	<b>NORMAL</b>
FLUID CONDITION	<b>NORMAL</b>

Machine Id  
**857-4245**

Component  
**Diesel Engine**

Fluid  
**CHEVRON DELO 400 SAE 10W30 (--- GAL)**

## RECOMMENDATION

Resample at the next service interval to monitor. Please specify the component make and model with your next sample.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		<b>RPL0014359</b>	RPL0010038	RPL05774705
Sample Date		Client Info		<b>20 Feb 2024</b>	17 May 2023	08 Feb 2023
Machine Age	hrs	Client Info		<b>4456</b>	4086	4071
Oil Age	hrs	Client Info		<b>0</b>	0	0
Filter Age	hrs	Client Info		<b>0</b>	0	0
Oil Changed		Client Info		<b>Changed</b>	Not Changd	N/A
Filter Changed		Client Info		<b>Changed</b>	Not Changd	N/A
Sample Status				<b>NORMAL</b>	NORMAL	MARGINAL

## WEAR

All component wear rates are normal.

Iron	ppm	ASTM D5185m	>100	<b>16</b>	18	15
Chromium	ppm	ASTM D5185m	>20	<b>1</b>	<1	<1
Nickel	ppm	ASTM D5185m	>4	<b>&lt;1</b>	0	0
Titanium	ppm	ASTM D5185m		<b>&lt;1</b>	<1	0
Silver	ppm	ASTM D5185m	>3	<b>&lt;1</b>	0	0
Aluminum	ppm	ASTM D5185m	>20	<b>4</b>	4	3
Lead	ppm	ASTM D5185m	>40	<b>&lt;1</b>	0	<1
Copper	ppm	ASTM D5185m	>330	<b>1</b>	2	<1
Tin	ppm	ASTM D5185m	>15	<b>1</b>	<1	<1
Vanadium	ppm	ASTM D5185m		<b>&lt;1</b>	0	0
White Metal	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE

## CONTAMINATION







There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185m	>25	<b>9</b>	7	7
Potassium	ppm	ASTM D5185m	>20	<b>12</b>	14	10
Fuel		WC Method	>5	<b>&lt;1.0</b>	<1.0	▲ 3.0
Water		WC Method	>0.2	<b>NEG</b>	NEG	NEG
Glycol		WC Method		<b>NEG</b>	NEG	NEG
Soot %	%	*ASTM D7844	>3	<b>0.2</b>	0.4	0.4
Nitration	Abs/cm	*ASTM D7624	>20	<b>8.4</b>	9.3	8.7
Sulfation	Abs/.1mm	*ASTM D7415	>30	<b>21.9</b>	22.4	22.3
Silt	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Debris	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Appearance	scalar	*Visual	NORML	<b>NORML</b>	NORML	NORML
Odor	scalar	*Visual	NORML	<b>NORML</b>	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	<b>NEG</b>	NEG	NEG

## FLUID CONDITION

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

Sodium	ppm	ASTM D5185m		<b>&lt;1</b>	4	0
Boron	ppm	ASTM D5185m		<b>53</b>	34	37
Barium	ppm	ASTM D5185m		<b>1</b>	0	0
Molybdenum	ppm	ASTM D5185m		<b>46</b>	33	37
Manganese	ppm	ASTM D5185m		<b>&lt;1</b>	<1	<1
Magnesium	ppm	ASTM D5185m		<b>480</b>	459	483
Calcium	ppm	ASTM D5185m		<b>1555</b>	1568	1663
Phosphorus	ppm	ASTM D5185m	1260	<b>776</b>	644	719
Zinc	ppm	ASTM D5185m	1400	<b>885</b>	759	880
Sulfur	ppm	ASTM D5185m		<b>2515</b>	2407	2328
Oxidation	Abs/.1mm	*ASTM D7414	>25	<b>20.9</b>	20.6	20.6
Base Number (BN)	mg KOH/g	ASTM D2896	10.1	<b>9.4</b>	9.3	9.0
Visc @ 100°C	cSt	ASTM D445	11.1	<b>10.4</b>	9.4	▲ 9.2

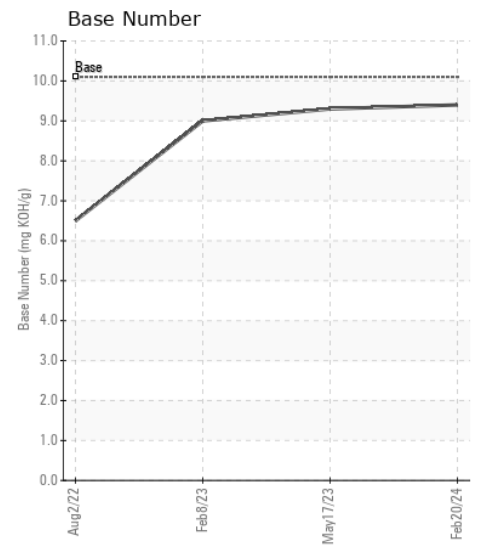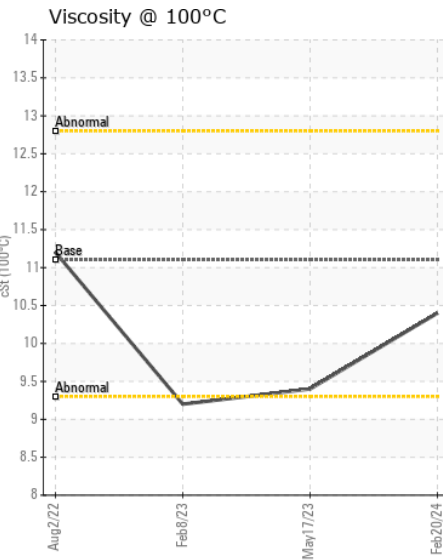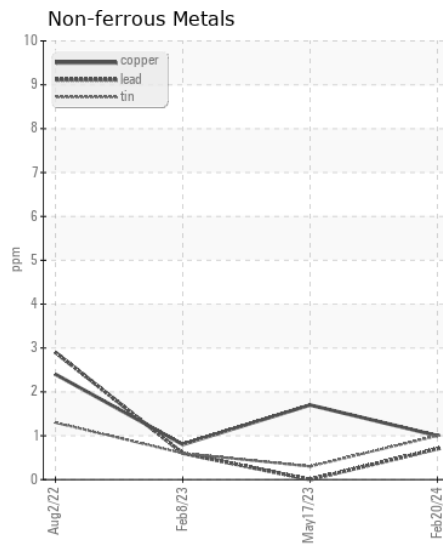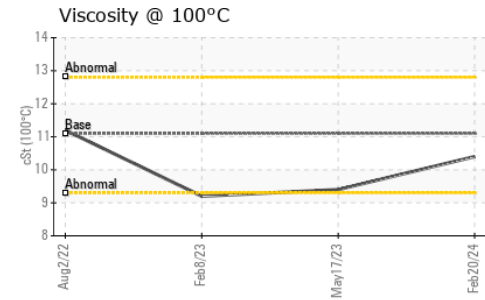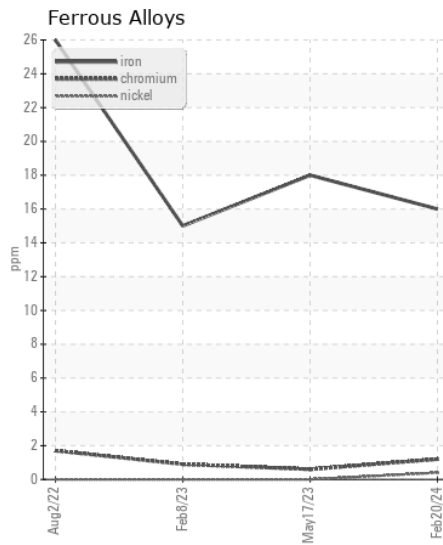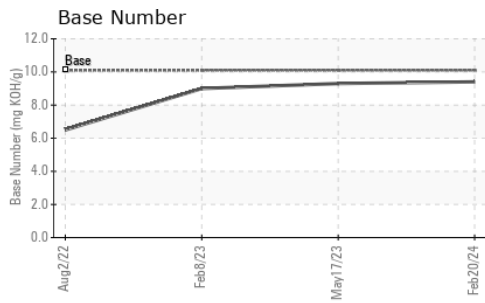

Certificate L2367

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : RPL0014359  
**Lab Number** : 06102363  
**Unique Number** : 10900593  
**Test Package** : FLEET

**Received** : 27 Feb 2024  
**Tested** : 28 Feb 2024  
**Diagnosed** : 28 Feb 2024 - Wes Davis

**RTL PACLEASE - 7001 - Houston**  
 6300 N. Loop East  
 Houston, TX  
 US 77026

Contact: RODNEY BRIGGS  
 briggsr@rushenterprises.com

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T:  
F: