



WEAR	<b>NORMAL</b>
CONTAMINATION	<b>NORMAL</b>
FLUID CONDITION	<b>NORMAL</b>



Area  
**[W/O 10376]**  
Machine Id  
**VOLVO L90H 625025**  
Component  
**Front Axle**  
Fluid  
**VOLVO WB 101 (8 GAL)**

**RECOMMENDATION**

Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		<b>ML0000012</b>	---	---
Sample Date		Client Info		<b>23 Feb 2024</b>	---	---
Machine Age	hrs	Client Info		<b>7981</b>	---	---
Oil Age	hrs	Client Info		<b>500</b>	---	---
Filter Age	hrs	Client Info		<b>500</b>	---	---
Oil Changed		Client Info		<b>Changed</b>	---	---
Filter Changed		Client Info		<b>Changed</b>	---	---
Sample Status				<b>NORMAL</b>	---	---

**WEAR**

All component wear rates are normal.

Iron	ppm	ASTM D5185m	>300	<b>20</b>	---	---
Chromium	ppm	ASTM D5185m	>10	<b>0</b>	---	---
Nickel	ppm	ASTM D5185m	>4	<b>0</b>	---	---
Titanium	ppm	ASTM D5185m		<b>0</b>	---	---
Silver	ppm	ASTM D5185m		<b>0</b>	---	---
Aluminum	ppm	ASTM D5185m	>15	<b>&lt;1</b>	---	---
Lead	ppm	ASTM D5185m	>4	<b>3</b>	---	---
Copper	ppm	ASTM D5185m	>200	<b>22</b>	---	---
Tin	ppm	ASTM D5185m	>15	<b>&lt;1</b>	---	---
Vanadium	ppm	ASTM D5185m		<b>0</b>	---	---
White Metal	scalar	*Visual	NONE	<b>NONE</b>	---	---
Yellow Metal	scalar	*Visual	NONE	<b>NONE</b>	---	---

**CONTAMINATION**





There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185m	>75	<b>10</b>	---	---
Potassium	ppm	ASTM D5185m	>20	<b>&lt;1</b>	---	---
Water		WC Method	>0.2	<b>NEG</b>	---	---
Silt	scalar	*Visual	NONE	<b>NONE</b>	---	---
Debris	scalar	*Visual	NONE	<b>NONE</b>	---	---
Sand/Dirt	scalar	*Visual	NONE	<b>NONE</b>	---	---
Appearance	scalar	*Visual	NORML	<b>NORML</b>	---	---
Odor	scalar	*Visual	NORML	<b>NORML</b>	---	---
Emulsified Water	scalar	*Visual	>0.2	<b>NEG</b>	---	---

**FLUID CONDITION**

The condition of the oil is acceptable for the time in service.

Sodium	ppm	ASTM D5185m		<b>8</b>	---	---
Boron	ppm	ASTM D5185m	100	<b>107</b>	---	---
Barium	ppm	ASTM D5185m	0	<b>0</b>	---	---
Molybdenum	ppm	ASTM D5185m	0	<b>4</b>	---	---
Manganese	ppm	ASTM D5185m		<b>&lt;1</b>	---	---
Magnesium	ppm	ASTM D5185m	0	<b>59</b>	---	---
Calcium	ppm	ASTM D5185m	3800	<b>3101</b>	---	---
Phosphorus	ppm	ASTM D5185m	1200	<b>1210</b>	---	---
Zinc	ppm	ASTM D5185m	1500	<b>1346</b>	---	---
Sulfur	ppm	ASTM D5185m	6500	<b>3179</b>	---	---
Visc @ 40°C	cSt	ASTM D445	52.0	<b>42.3</b>	---	---

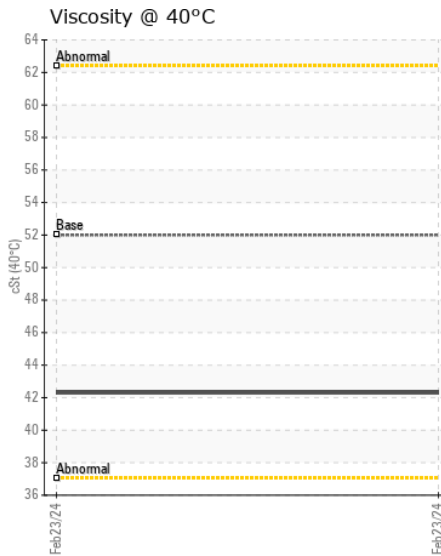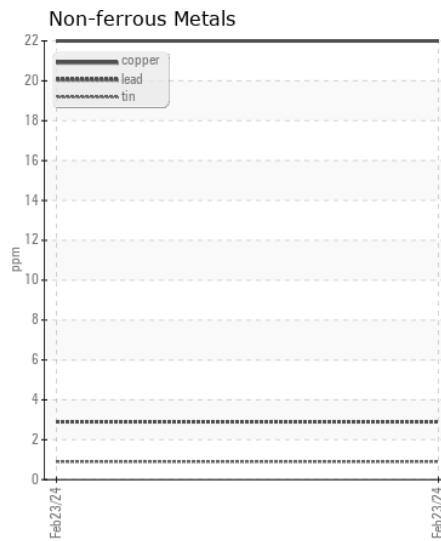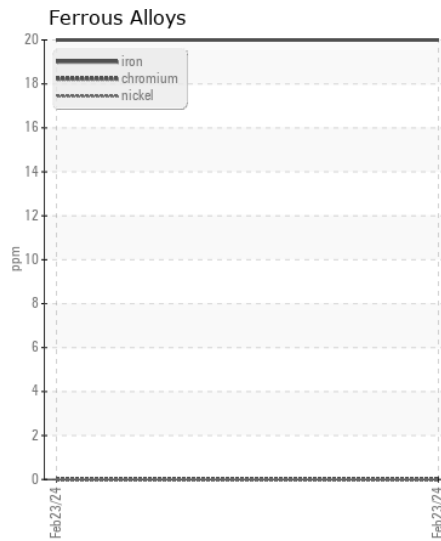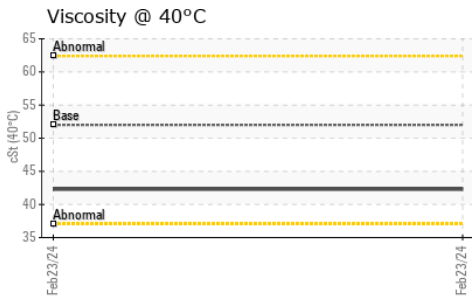

Certificate L2367

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : ML0000012  
**Lab Number** : 06102608  
**Unique Number** : 10900838  
**Test Package** : CONST

**Received** : 27 Feb 2024  
**Tested** : 28 Feb 2024  
**Diagnosed** : 29 Feb 2024 - Don Baldrige

**MCCLUNG-LOGAN EQUIPMENT CO - BALTIMORE**  
 4601 WASHINGTON BOULEVARD  
 BALTIMORE, MD  
 US 21227

Contact: MARK CIULLA  
 mciulla@mcclung-logan.com

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T: (410)242-6500  
 F: (410)242-7835