



VOLVO

OIL ANALYSIS REPORT

WEAR	ABNORMAL
CONTAMINATION	ABNORMAL
FLUID CONDITION	ATTENTION



Area
[661614 RYAN GOLF]
Machine Id
VOLVO A40G 352296
Component
Diesel Engine
Fluid
VOLVO ULTRA DIESEL ENGINE OIL 15W40 VDS-3 (--- GAL)

RECOMMENDATION

Oil and filter change at the time of sampling has been noted. Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		VCP452451	---	---
Sample Date		Client Info		30 Jan 2024	---	---
Machine Age	hrs	Client Info		1202	---	---
Oil Age	hrs	Client Info		500	---	---
Filter Age	hrs	Client Info		0	---	---
Oil Changed		Client Info		Changed	---	---
Filter Changed		Client Info		Changed	---	---
Sample Status				ABNORMAL	---	---

WEAR

Valve wear is indicated.

Iron	ppm	ASTM D5185m	>100	57	---	---
Chromium	ppm	ASTM D5185m	>20	2	---	---
Nickel	ppm	ASTM D5185m	>2	▲ 34	---	---
Titanium	ppm	ASTM D5185m		<1	---	---
Silver	ppm	ASTM D5185m	>2	0	---	---
Aluminum	ppm	ASTM D5185m	>25	6	---	---
Lead	ppm	ASTM D5185m	>40	<1	---	---
Copper	ppm	ASTM D5185m	>330	159	---	---
Tin	ppm	ASTM D5185m	>15	7	---	---
Vanadium	ppm	ASTM D5185m		<1	---	---
White Metal	scalar	*Visual	NONE	NONE	---	---
Yellow Metal	scalar	*Visual	NONE	NONE	---	---

CONTAMINATION

Fuel content negligible. Elemental level of silicon (Si) above normal indicating ingress of seal material.


Silicon	ppm	ASTM D5185m	>25	▲ 41	---	---
Potassium	ppm	ASTM D5185m	>20	7	---	---
Fuel	%	ASTM D3524	>6.0	0.4	---	---
Water		WC Method	>0.2	NEG	---	---
Glycol		WC Method		NEG	---	---
Soot %	%	*ASTM D7844	>3	0.4	---	---
Nitration	Abs/cm	*ASTM D7624	>20	9.9	---	---
Sulfation	Abs/.1mm	*ASTM D7415	>30	23.2	---	---
Silt	scalar	*Visual	NONE	NONE	---	---
Debris	scalar	*Visual	NONE	NONE	---	---
Sand/Dirt	scalar	*Visual	NONE	NONE	---	---
Appearance	scalar	*Visual	NORML	NORML	---	---
Odor	scalar	*Visual	NORML	NORML	---	---
Emulsified Water	scalar	*Visual	>0.2	NEG	---	---

FLUID CONDITION


The oil viscosity is lower than normal. The BN result indicates that there is suitable alkalinity remaining in the oil. Confirm oil type.

Sodium	ppm	ASTM D5185m		13	---	---
Boron	ppm	ASTM D5185m	2.5	16	---	---
Barium	ppm	ASTM D5185m	0.0	2	---	---
Molybdenum	ppm	ASTM D5185m	0.7	91	---	---
Manganese	ppm	ASTM D5185m	0.0	7	---	---
Magnesium	ppm	ASTM D5185m	256	484	---	---
Calcium	ppm	ASTM D5185m	2057	2322	---	---
Phosphorus	ppm	ASTM D5185m	935	1135	---	---
Zinc	ppm	ASTM D5185m	1223	1542	---	---
Sulfur	ppm	ASTM D5185m	4079	4467	---	---
Oxidation	Abs/.1mm	*ASTM D7414	>25	16.9	---	---
Base Number (BN)	mg KOH/g	ASTM D2896	10	5.1	---	---
Visc @ 100°C	cSt	ASTM D445	15.0	● 10.9	---	---


▲ Ferrous Alloys

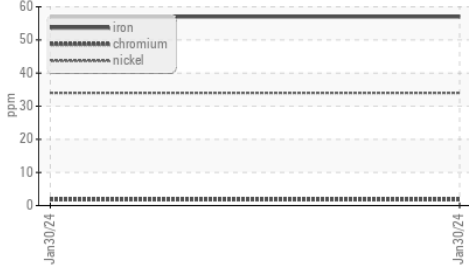


Iron (ppm)

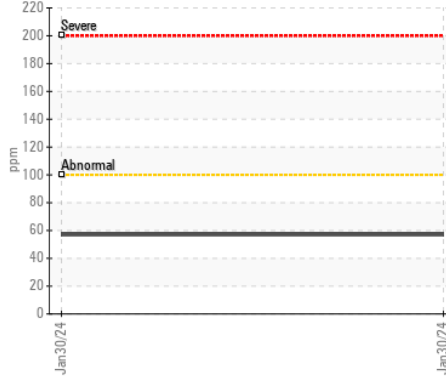


Lead (ppm)

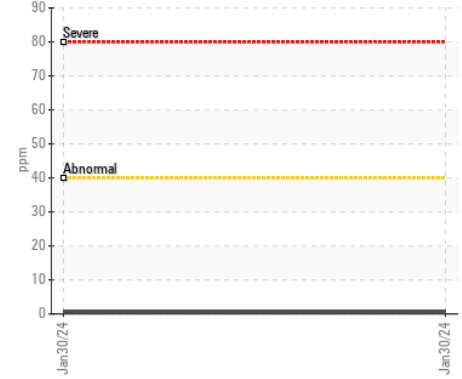


▲ Silicon (ppm)

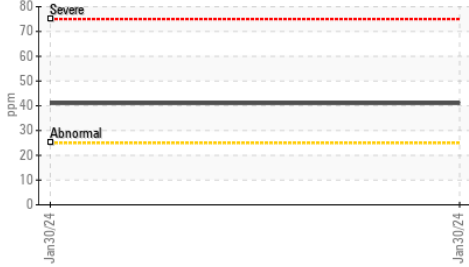

Aluminum (ppm)

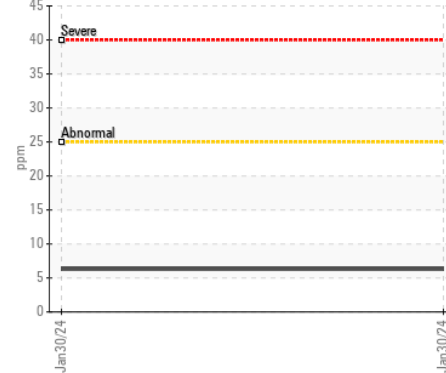


Chromium (ppm)

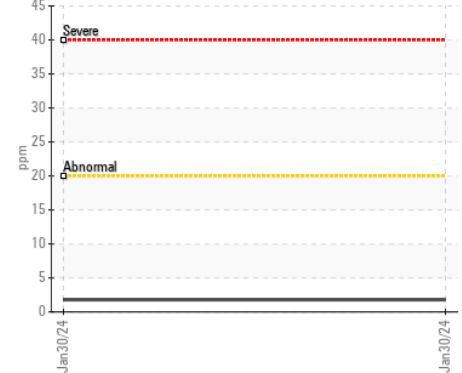


● Viscosity @ 100°C




Copper (ppm)

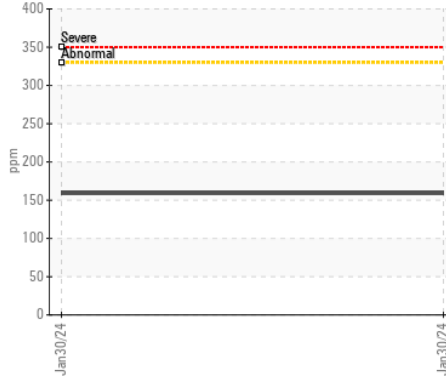


▲ Silicon (ppm)

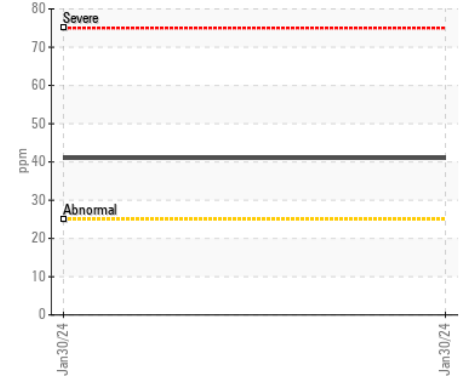


Fuel Dilution

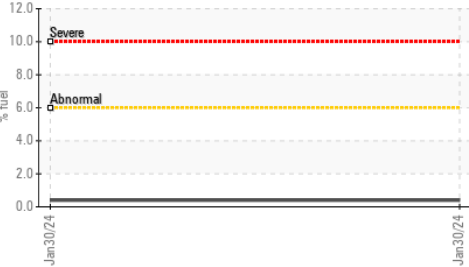


● Viscosity @ 100°C

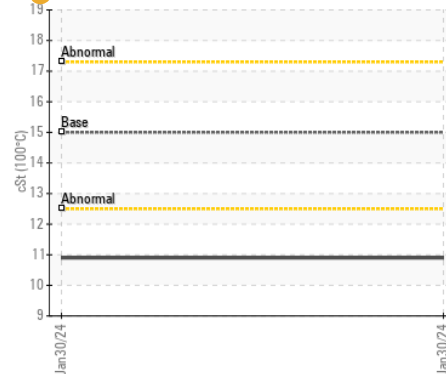

Base Number

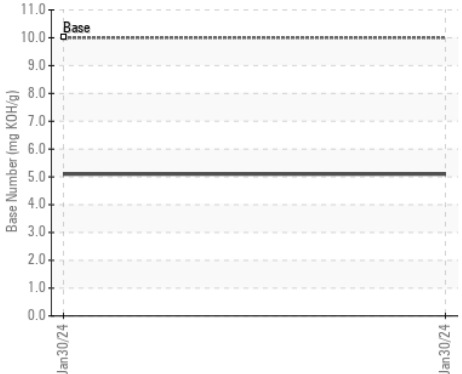

Base Number

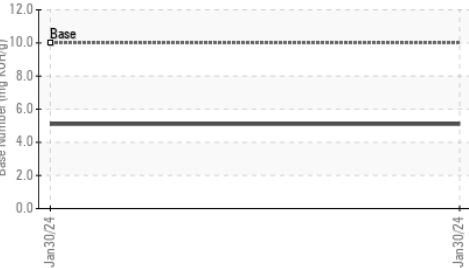

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : VCP452451 **Received** : 28 Feb 2024
Lab Number : 06102679 **Tested** : 04 Mar 2024
Unique Number : 10900909 **Diagnosed** : 04 Mar 2024 - Jonathan Hester
Test Package : MOB 1 (Additional Tests: FuelDilution, PercentFuel, TBN)

ALTA EQUIPMENT/FLAGLER CONSTRUCTION EQUIPMENT LLC
 8418 PALM RIVER ROAD
 TAMPA, FL
 US 33619
 Contact: JOHN FARDELLA
 john.fardella@altg.com
 T: (813)630-0077
 F: (813)630-2233

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)