



WEAR	<b>NORMAL</b>
CONTAMINATION	<b>NORMAL</b>
FLUID CONDITION	<b>NORMAL</b>



Machine Id  
**4711M**  
Component  
**Diesel Engine**  
Fluid  
**PETRO CANADA DURON SHP 15W40 (--- GAL)**

**RECOMMENDATION**

Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		<b>GFL0108949</b>	GFL0105593	GFL0093142
Sample Date		Client Info		<b>24 Feb 2024</b>	11 Dec 2023	14 Nov 2023
Machine Age	hrs	Client Info		<b>13149</b>	12918	12762
Oil Age	hrs	Client Info		<b>12918</b>	12762	12627
Filter Age	hrs	Client Info		<b>12918</b>	12762	12627
Oil Changed		Client Info		<b>Changed</b>	Not Changd	Changed
Filter Changed		Client Info		<b>Changed</b>	Not Changed	Changed
Sample Status				<b>NORMAL</b>	NORMAL	NORMAL

**WEAR**

All component wear rates are normal.

Iron	ppm	ASTM D5185m	>75	<b>29</b>	12	10
Chromium	ppm	ASTM D5185m	>5	<b>2</b>	<1	<1
Nickel	ppm	ASTM D5185m	>4	<b>&lt;1</b>	0	0
Titanium	ppm	ASTM D5185m	>2	<b>&lt;1</b>	0	<1
Silver	ppm	ASTM D5185m	>2	<b>0</b>	0	0
Aluminum	ppm	ASTM D5185m	>15	<b>7</b>	3	3
Lead	ppm	ASTM D5185m	>25	<b>&lt;1</b>	<1	0
Copper	ppm	ASTM D5185m	>100	<b>3</b>	1	2
Tin	ppm	ASTM D5185m	>4	<b>&lt;1</b>	0	<1
Vanadium	ppm	ASTM D5185m		<b>0</b>	0	<1
White Metal	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE

**CONTAMINATION**







There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185m	>25	<b>8</b>	4	5
Potassium	ppm	ASTM D5185m	>20	<b>4</b>	1	2
Fuel		WC Method	>3.0	<b>&lt;1.0</b>	<1.0	<1.0
Water		WC Method	>0.2	<b>NEG</b>	NEG	NEG
Glycol		WC Method		<b>NEG</b>	NEG	NEG
Soot %	%	*ASTM D7844	>6	<b>0.8</b>	0.5	0.3
Nitration	Abs/cm	*ASTM D7624	>20	<b>11.7</b>	8.0	6.5
Sulfation	Abs/.1mm	*ASTM D7415	>30	<b>22.3</b>	19.2	18.9
Silt	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Debris	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Appearance	scalar	*Visual	NORML	<b>NORML</b>	NORML	NORML
Odor	scalar	*Visual	NORML	<b>NORML</b>	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	<b>NEG</b>	NEG	NEG

**FLUID CONDITION**

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

Sodium	ppm	ASTM D5185m		<b>10</b>	3	4
Boron	ppm	ASTM D5185m	0	<b>1</b>	<1	<1
Barium	ppm	ASTM D5185m	0	<b>0</b>	0	0
Molybdenum	ppm	ASTM D5185m	60	<b>58</b>	52	54
Manganese	ppm	ASTM D5185m	0	<b>&lt;1</b>	0	<1
Magnesium	ppm	ASTM D5185m	1010	<b>917</b>	971	889
Calcium	ppm	ASTM D5185m	1070	<b>1074</b>	1070	1040
Phosphorus	ppm	ASTM D5185m	1150	<b>1024</b>	1049	983
Zinc	ppm	ASTM D5185m	1270	<b>1244</b>	1227	1230
Sulfur	ppm	ASTM D5185m	2060	<b>2998</b>	2978	2767
Oxidation	Abs/.1mm	*ASTM D7414	>25	<b>21.0</b>	15.7	14.5
Base Number (BN)	mg KOH/g	ASTM D2896	9.8	<b>6.6</b>	8.7	8.3
Visc @ 100°C	cSt	ASTM D445	15.4	<b>13.5</b>	13.1	13.9

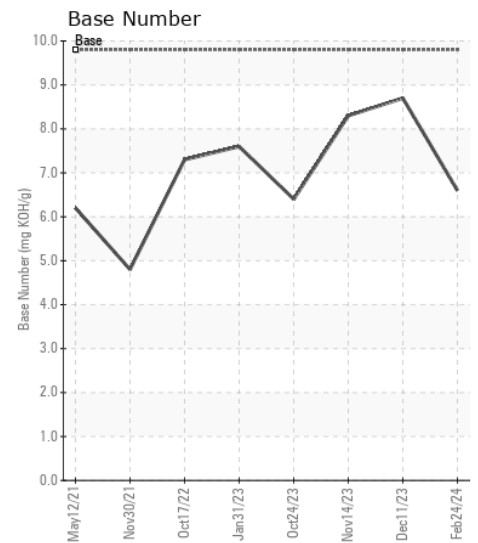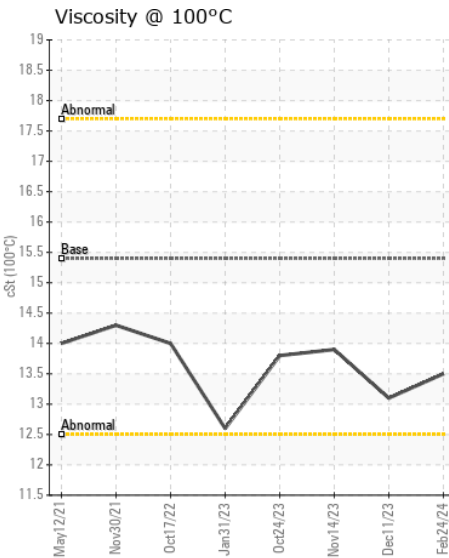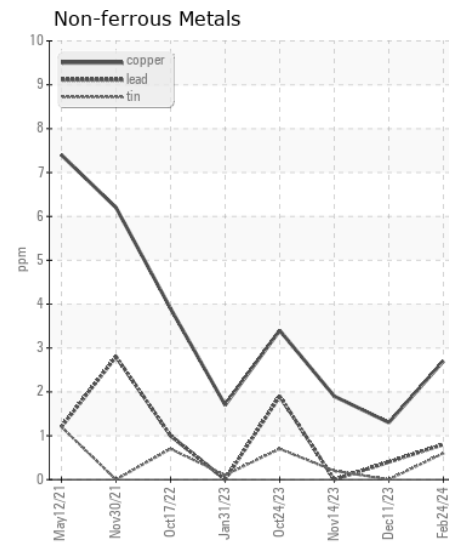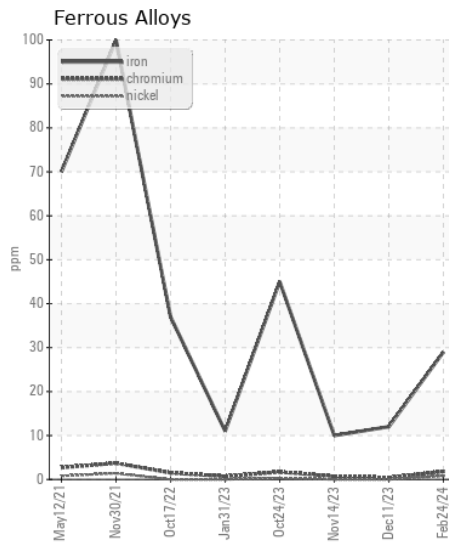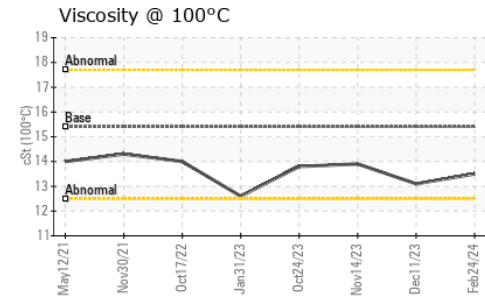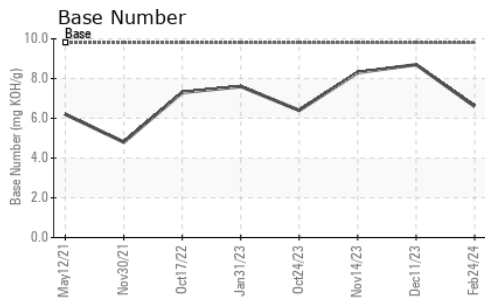

Certificate L2367

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : GFL0108949  
**Lab Number** : 06102772  
**Unique Number** : 10901002  
**Test Package** : FLEET

**Received** : 28 Feb 2024  
**Tested** : 29 Feb 2024  
**Diagnosed** : 29 Feb 2024 - Wes Davis

**GFL Environmental - 415 - Michigan East**  
 6200 Elmridge  
 Sterling Heights, MI  
 US 48313  
 Contact: Frank Wolak  
 fwolak@gflenv.com  
 T: (586)825-9514  
 F:

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)