



WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	ATTENTION

Area
BEALETON

Machine Id
JOHN DEERE 944K M02-0913 1DW944KXKML703638

Component
Diesel Engine

Fluid
JOHN DEERE ENGINE OIL PLUS 50 II 15W40 (46 GAL)

RECOMMENDATION

Oil and filter change at the time of sampling has been noted. Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		JR0175981	JR0146448	JR0123219
Sample Date		Client Info		01 Feb 2024	13 Oct 2022	12 Apr 2022
Machine Age	hrs	Client Info		2590	1626	500
Oil Age	hrs	Client Info		481	1126	500
Filter Age	hrs	Client Info		181	1126	500
Oil Changed		Client Info		Changed	Changed	Changed
Filter Changed		Client Info		Changed	Changed	Changed
Sample Status				ATTENTION	ATTENTION	ABNORMAL

WEAR

All component wear rates are normal.

Iron	ppm	ASTM D5185m	>51	27	74	43
Chromium	ppm	ASTM D5185m	>11	<1	2	1
Nickel	ppm	ASTM D5185m	>5	<1	1	6
Titanium	ppm	ASTM D5185m		<1	<1	<1
Silver	ppm	ASTM D5185m	>3	0	0	0
Aluminum	ppm	ASTM D5185m	>31	3	11	5
Lead	ppm	ASTM D5185m	>26	7	37	43
Copper	ppm	ASTM D5185m	>26	9	59	▲ 314
Tin	ppm	ASTM D5185m	>4	2	6	11
Vanadium	ppm	ASTM D5185m		0	0	0
White Metal	scalar	*Visual	NONE	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	NONE

CONTAMINATION








There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185m	>22	6	7	10
Potassium	ppm	ASTM D5185m	>20	4	29	5
Fuel	%	ASTM D3524	>2.1	<1.0	<1.0	1.9
Water		WC Method	>0.21	NEG	NEG	NEG
Glycol		WC Method		NEG	NEG	NEG
Soot %	%	*ASTM D7844	>3	0.7	1.4	0.7
Nitration	Abs/cm	*ASTM D7624	>20	11.4	15.3	11.9
Sulfation	Abs/.1mm	*ASTM D7415	>30	23.2	30.9	26.2
Silt	scalar	*Visual	NONE	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.21	NEG	NEG	NEG

FLUID CONDITION

The oil viscosity is lower than normal. The BN result indicates that there is suitable alkalinity remaining in the oil. Confirm oil type.

Sodium	ppm	ASTM D5185m	>31	5	5	7
Boron	ppm	ASTM D5185m		14	15	57
Barium	ppm	ASTM D5185m		0	0	0
Molybdenum	ppm	ASTM D5185m		76	151	219
Manganese	ppm	ASTM D5185m		<1	4	7
Magnesium	ppm	ASTM D5185m		768	798	823
Calcium	ppm	ASTM D5185m		1376	1502	1485
Phosphorus	ppm	ASTM D5185m		952	898	949
Zinc	ppm	ASTM D5185m		1179	1147	1159
Sulfur	ppm	ASTM D5185m		3337	3253	2293
Oxidation	Abs/.1mm	*ASTM D7414	>25	16.5	26.8	20.2
Base Number (BN)	mg KOH/g	ASTM D2896	13.6	6.8	7.6	9.5
Visc @ 100°C	cSt	ASTM D445	15.4	● 11.6	● 11.8	● 10.2

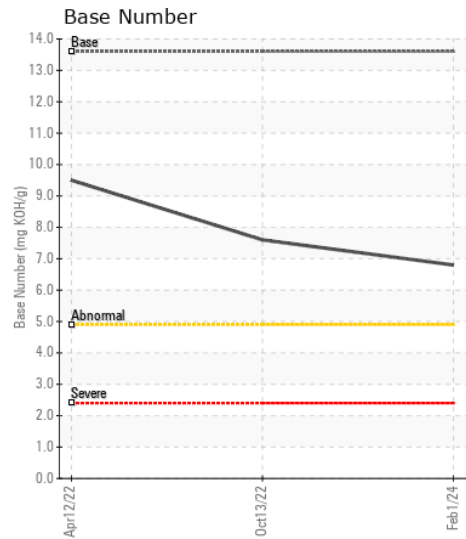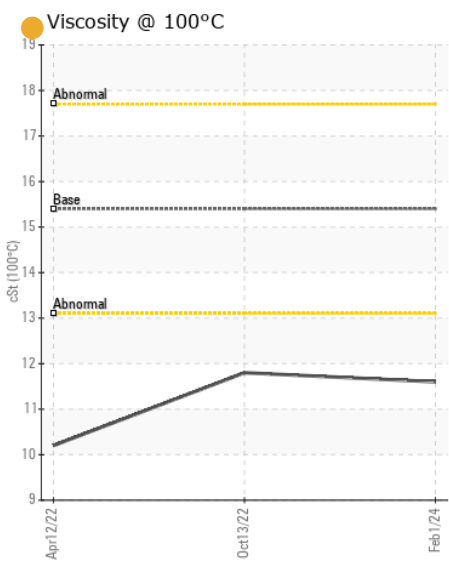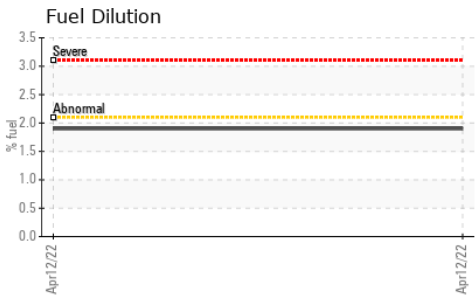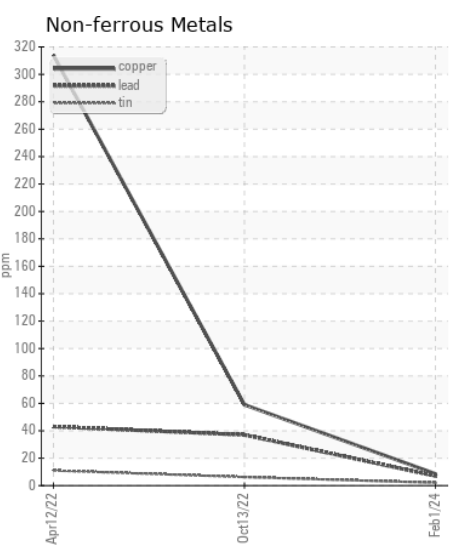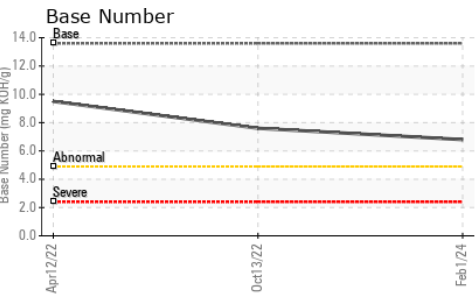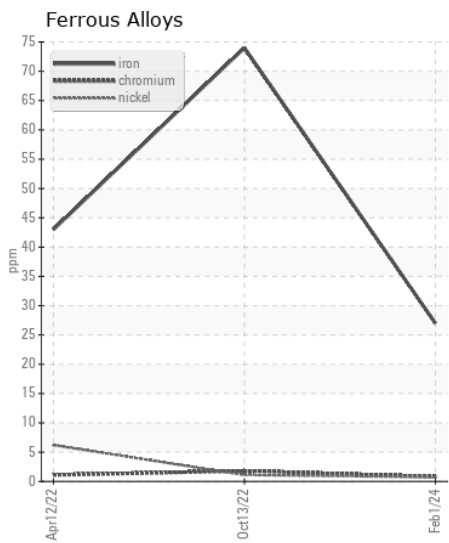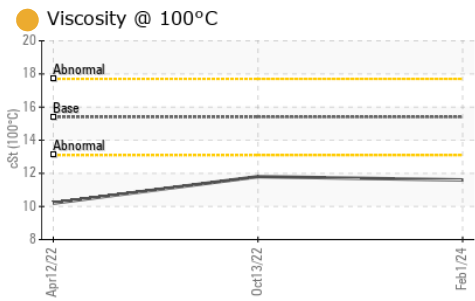

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : JR0175981 **Received** : 28 Feb 2024
Lab Number : 06102787 **Tested** : 29 Feb 2024
Unique Number : 10901017 **Diagnosed** : 29 Feb 2024 - Don Baldrige
Test Package : CONST (Additional Tests: FuelDilution, PercentFuel, TBN)

LUCK STONE
 19380 RICHMOND TURNPIKE
 MILFORD, VA
 US 22514
 Contact: BRYAN MORRIS
 bmorris@luckstone.com
 T: (804)400-3630
 F: x:

Certificate L2367
 To discuss this sample report, contact Customer Service at 1-800-237-1369.
 * - Denotes test methods that are outside of the ISO 17025 scope of accreditation.
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)