



WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL

Area

[W49869]

Machine Id

HITACHI 470LC-6 HCMJAG60T00060492

Component

Diesel Engine

Fluid

JOHN DEERE ENGINE OIL PLUS 50 II 15W40 (--- GAL)

RECOMMENDATION

Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		JR0200506	JR0148005	JR0147129
Sample Date		Client Info		22 Feb 2024	28 Mar 2023	25 Jan 2023
Machine Age	hrs	Client Info		7013	6498	6073
Oil Age	hrs	Client Info		0	0	1
Filter Age	hrs	Client Info		0	0	1
Oil Changed		Client Info		Changed	Changed	N/A
Filter Changed		Client Info		Changed	Changed	N/A
Sample Status				NORMAL	NORMAL	NORMAL

WEAR

All component wear rates are normal.

Iron	ppm	ASTM D5185m	>100	68	10	4
Chromium	ppm	ASTM D5185m	>20	1	<1	<1
Nickel	ppm	ASTM D5185m	>4	<1	<1	0
Titanium	ppm	ASTM D5185m		<1	0	0
Silver	ppm	ASTM D5185m	>3	0	0	0
Aluminum	ppm	ASTM D5185m	>20	16	3	2
Lead	ppm	ASTM D5185m	>40	<1	<1	<1
Copper	ppm	ASTM D5185m	>330	17	8	3
Tin	ppm	ASTM D5185m	>15	2	2	<1
Vanadium	ppm	ASTM D5185m		0	0	<1
White Metal	scalar	*Visual	NONE	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	NONE

CONTAMINATION







There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185m	>25	12	16	12
Potassium	ppm	ASTM D5185m	>20	2	1	1
Fuel		WC Method	>5	<1.0	<1.0	<1.0
Water		WC Method	>0.2	NEG	NEG	NEG
Glycol		WC Method		NEG	NEG	NEG
Soot %	%	*ASTM D7844	>3	0.3	0.2	0.1
Nitration	Abs/cm	*ASTM D7624	>20	8.2	7.7	5.5
Sulfation	Abs/.1mm	*ASTM D7415	>30	21.9	21.7	19.5
Silt	scalar	*Visual	NONE	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG	NEG

FLUID CONDITION

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

Sodium	ppm	ASTM D5185m		2	1	2
Boron	ppm	ASTM D5185m		177	206	259
Barium	ppm	ASTM D5185m		0	0	<1
Molybdenum	ppm	ASTM D5185m		232	213	216
Manganese	ppm	ASTM D5185m		4	2	<1
Magnesium	ppm	ASTM D5185m		837	746	720
Calcium	ppm	ASTM D5185m		1588	1660	1312
Phosphorus	ppm	ASTM D5185m		983	958	802
Zinc	ppm	ASTM D5185m		1201	1142	1013
Sulfur	ppm	ASTM D5185m		3307	3283	3402
Oxidation	Abs/.1mm	*ASTM D7414	>25	16.6	16.8	13.6
Base Number (BN)	mg KOH/g	ASTM D2896	13.6	8.4	9.2	9.4
Visc @ 100°C	cSt	ASTM D445	15.4	13.2	13.1	14.1

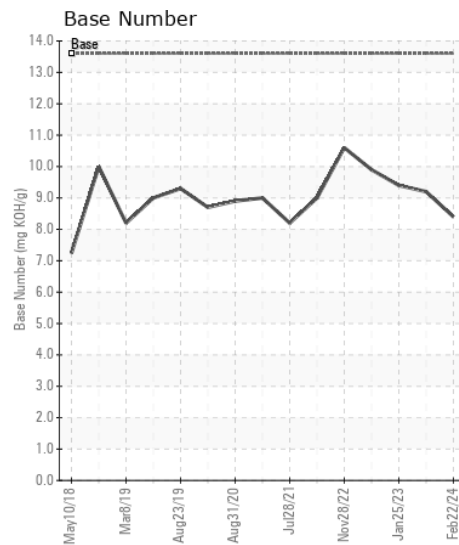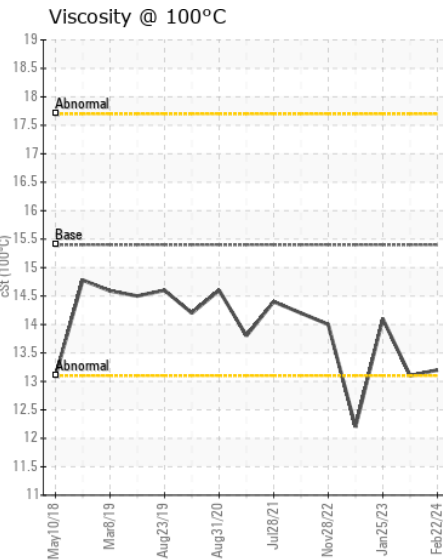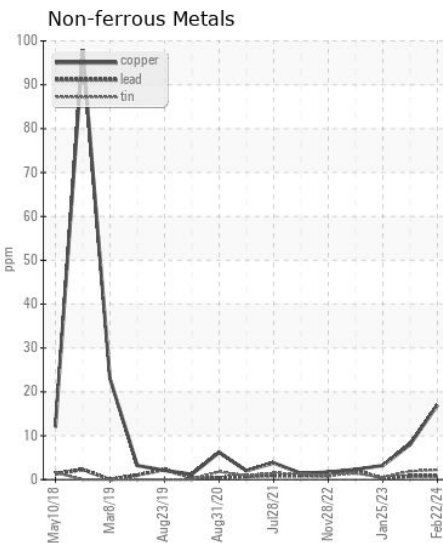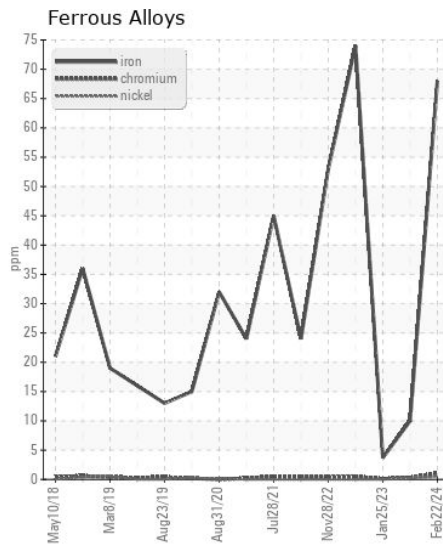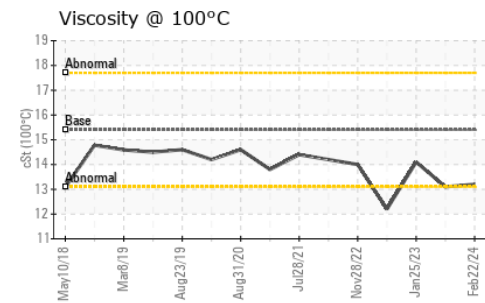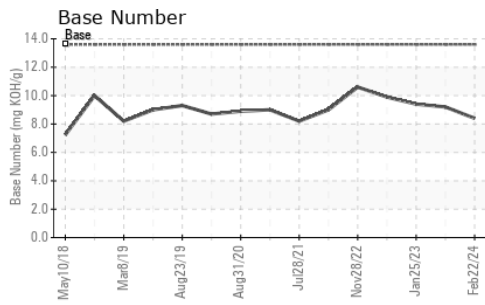

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : JR0200506 **Received** : 28 Feb 2024
Lab Number : 06102794 **Tested** : 29 Feb 2024
Unique Number : 10901024 **Diagnosed** : 29 Feb 2024 - Don Baldrige
Test Package : CONST (Additional Tests: TBN)

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

JRE - ASHLAND
 11047 LEADBETTER RD
 ASHLAND, VA
 US 23005

Contact: DAVID ZIEG
 dzieg@jamesriverequipment.com

T: (804)798-6001

F: (804)798-0292