



WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL

Machine Id
929095-260368

Component
Diesel Engine

Fluid
PETRO CANADA DURON SHP 15W40 (--- GAL)

RECOMMENDATION

Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		GFL0087915	GFL0068558	GFL0056952
Sample Date		Client Info		27 Feb 2024	12 Apr 2023	28 Feb 2023
Machine Age	mls	Client Info		0	143116	34936
Oil Age	mls	Client Info		0	0	600
Filter Age	mls	Client Info		0	0	600
Oil Changed		Client Info		N/A	Changed	Changed
Filter Changed		Client Info		N/A	Changed	Changed
Sample Status				NORMAL	ATTENTION	SEVERE

WEAR

All component wear rates are normal.

Iron	ppm	ASTM D5185m	>100	28	9	22
Chromium	ppm	ASTM D5185m	>20	2	<1	2
Nickel	ppm	ASTM D5185m	>4	<1	0	0
Titanium	ppm	ASTM D5185m		<1	0	<1
Silver	ppm	ASTM D5185m	>3	0	0	0
Aluminum	ppm	ASTM D5185m	>20	5	0	4
Lead	ppm	ASTM D5185m	>40	0	0	<1
Copper	ppm	ASTM D5185m	>330	13	5	38
Tin	ppm	ASTM D5185m	>15	<1	0	<1
Vanadium	ppm	ASTM D5185m		0	0	<1
White Metal	scalar	*Visual	NONE	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	NONE

CONTAMINATION







There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185m	>25	10	3	10
Potassium	ppm	ASTM D5185m	>20	16	8	▲ 139
Fuel		WC Method	>5	<1.0	<1.0	<1.0
Water		WC Method	>0.2	NEG	NEG	NEG
Glycol		WC Method		NEG	NEG	▲ 0.12
Soot %	%	*ASTM D7844	>3	0.5	0.3	0.3
Nitration	Abs/cm	*ASTM D7624	>20	10.7	6.2	11.6
Sulfation	Abs/.1mm	*ASTM D7415	>30	21.5	16.8	20.1
Silt	scalar	*Visual	NONE	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG	NEG

FLUID CONDITION

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

Sodium	ppm	ASTM D5185m		18	● 136	● 2898
Boron	ppm	ASTM D5185m	0	<1	<1	6
Barium	ppm	ASTM D5185m	0	0	0	0
Molybdenum	ppm	ASTM D5185m	60	62	67	172
Manganese	ppm	ASTM D5185m	0	<1	<1	2
Magnesium	ppm	ASTM D5185m	1010	951	906	816
Calcium	ppm	ASTM D5185m	1070	1056	1091	942
Phosphorus	ppm	ASTM D5185m	1150	1017	1016	902
Zinc	ppm	ASTM D5185m	1270	1243	1231	1116
Sulfur	ppm	ASTM D5185m	2060	3046	3313	2796
Oxidation	Abs/.1mm	*ASTM D7414	>25	19.9	13.3	14.8
Base Number (BN)	mg KOH/g	ASTM D2896	9.8	7.9	8.4	0
Visc @ 100°C	cSt	ASTM D445	15.4	13.0	13.8	15.0

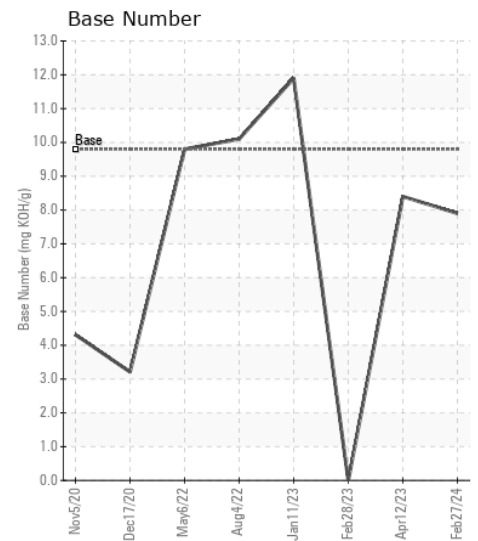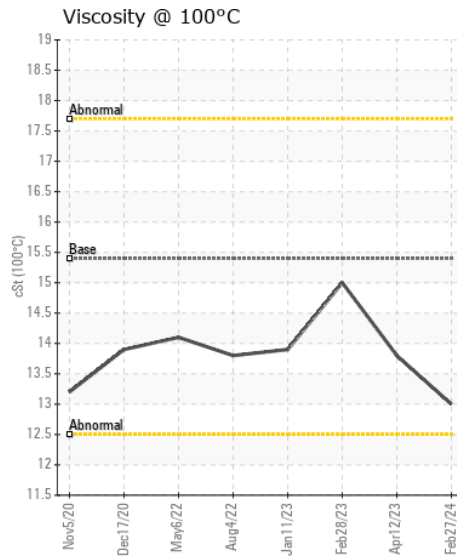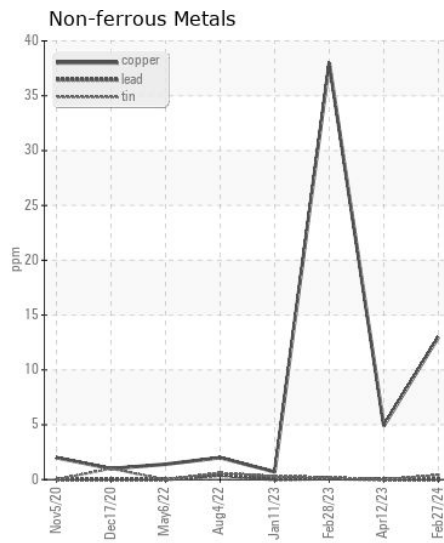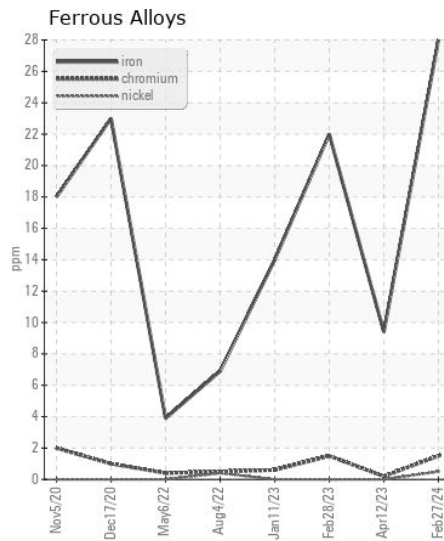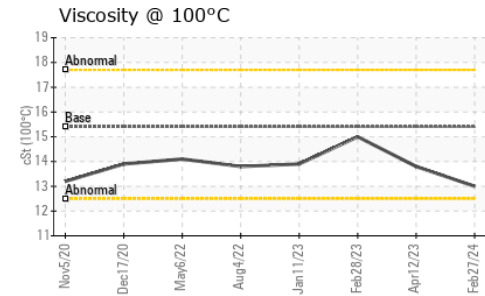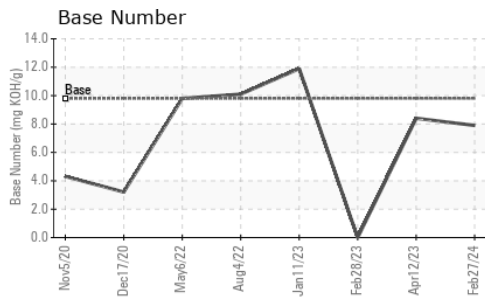

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : GFL0087915
Lab Number : 06102803
Unique Number : 10901033
Test Package : FLEET

Received : 28 Feb 2024
Tested : 29 Feb 2024
Diagnosed : 29 Feb 2024 - Wes Davis

GFL Environmental - 859 - Bay City
 700 Avenue F
 Bay City, TX
 US 77414

Contact: JONATHON BROWN
 jonathon.brown@gflenv.com

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T:
F: