



VOLVO

OIL ANALYSIS REPORT

WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL



Area
[661880 MOSAIC]
Machine Id
VOLVO EC480EL 315030
Component
Hydraulic System
Fluid
VOLVO SUPER HYDRAULIC OIL 46 (--- GAL)

RECOMMENDATION

Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		VCP452271	VCP426239	---
Sample Date		Client Info		31 Jan 2024	29 Sep 2023	---
Machine Age	hrs	Client Info		1027	584	---
Oil Age	hrs	Client Info		1027	584	---
Filter Age	hrs	Client Info		0	0	---
Oil Changed		Client Info		Not Changd	Not Changd	---
Filter Changed		Client Info		Changed	Changed	---
Sample Status				NORMAL	ATTENTION	---

WEAR

All component wear rates are normal.

Iron	ppm	ASTM D5185m	>25	2	0	---
Chromium	ppm	ASTM D5185m	>10	0	0	---
Nickel	ppm	ASTM D5185m	>10	<1	<1	---
Titanium	ppm	ASTM D5185m		0	0	---
Silver	ppm	ASTM D5185m		0	0	---
Aluminum	ppm	ASTM D5185m	>20	<1	<1	---
Lead	ppm	ASTM D5185m	>20	<1	1	---
Copper	ppm	ASTM D5185m	>150	17	13	---
Tin	ppm	ASTM D5185m	>10	0	<1	---
Vanadium	ppm	ASTM D5185m		0	0	---
White Metal	scalar	*Visual	NONE	NONE	NONE	---
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	---

CONTAMINATION










The system cleanliness is acceptable for your target ISO 4406 cleanliness code. The system and fluid cleanliness is acceptable.

Silicon	ppm	ASTM D5185m	>50	6	5	---
Potassium	ppm	ASTM D5185m	>20	1	2	---
Water		WC Method	>0.1	NEG	NEG	---
Particles >4µm		ASTM D7647	>40000	5485	42172	---
Particles >6µm		ASTM D7647	>10000	393	6268	---
Particles >14µm		ASTM D7647	>2500	21	128	---
Particles >21µm		ASTM D7647	>640	6	20	---
Particles >38µm		ASTM D7647	>160	0	1	---
Particles >71µm		ASTM D7647	>40	0	0	---
Oil Cleanliness		ISO 4406 (c)	>22/20/18	20/16/12	23/20/14	---
Silt	scalar	*Visual	NONE	NONE	NONE	---
Debris	scalar	*Visual	NONE	NONE	NONE	---
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	---
Appearance	scalar	*Visual	NORML	NORML	NORML	---
Odor	scalar	*Visual	NORML	NORML	NORML	---
Emulsified Water	scalar	*Visual	>0.1	NEG	NEG	---

FLUID CONDITION

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

Sodium	ppm	ASTM D5185m		2	1	---
Boron	ppm	ASTM D5185m	14	0	0	---
Barium	ppm	ASTM D5185m	0.0	0	0	---
Molybdenum	ppm	ASTM D5185m	0.0	0	0	---
Manganese	ppm	ASTM D5185m	0.0	<1	<1	---
Magnesium	ppm	ASTM D5185m	2.6	1	4	---
Calcium	ppm	ASTM D5185m	49	84	92	---
Phosphorus	ppm	ASTM D5185m	354	408	439	---
Zinc	ppm	ASTM D5185m	419	556	605	---
Sulfur	ppm	ASTM D5185m	3719	1043	1109	---
Acid Number (AN)	mg KOH/g	ASTM D8045		1.01	0.51	---
Visc @ 40°C	cSt	ASTM D445	46	42.1	42.4	---

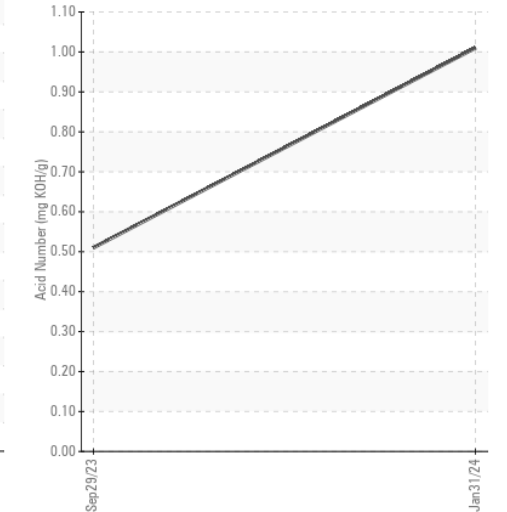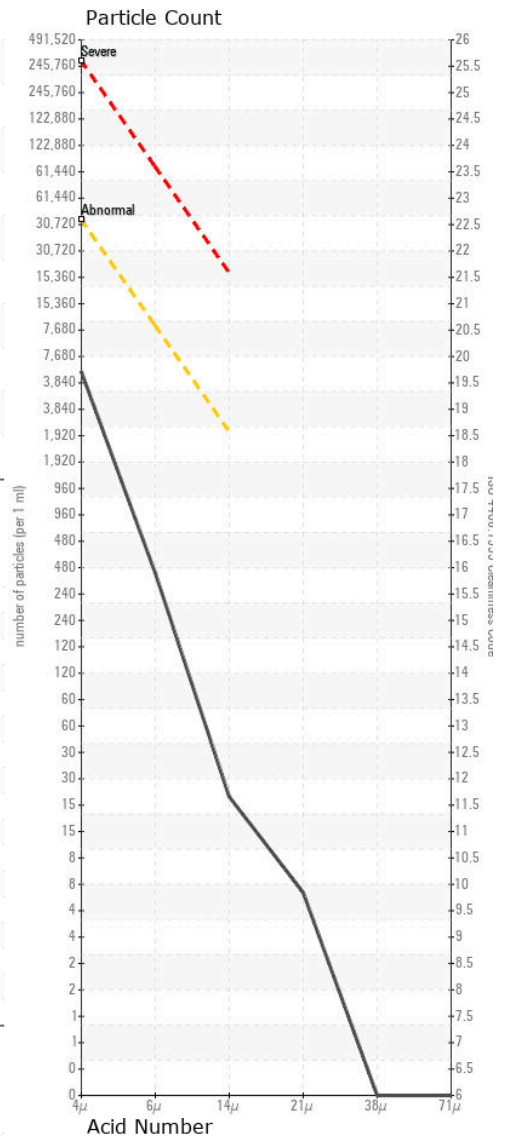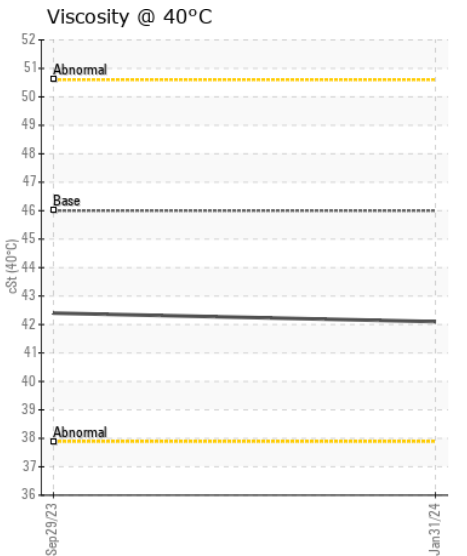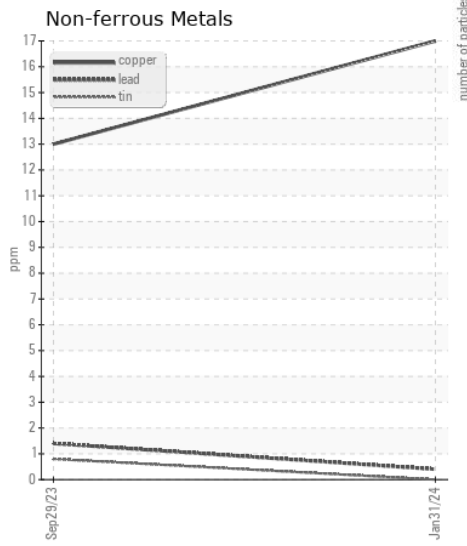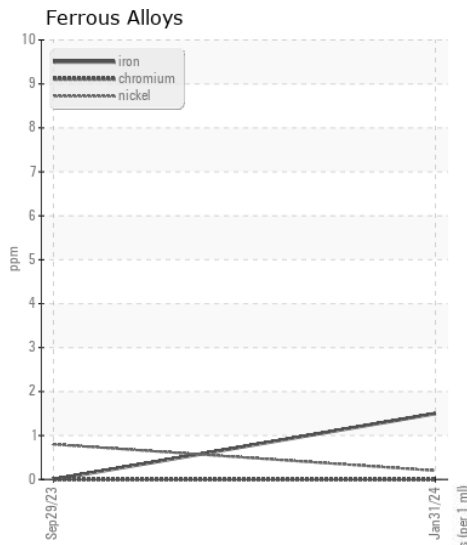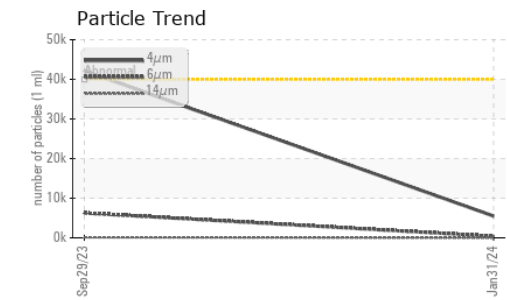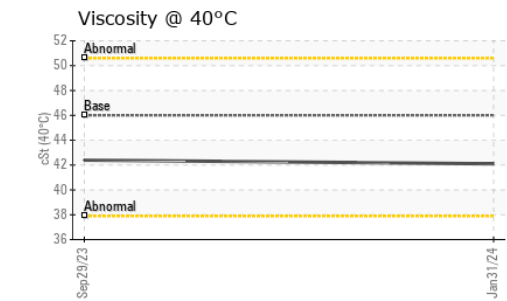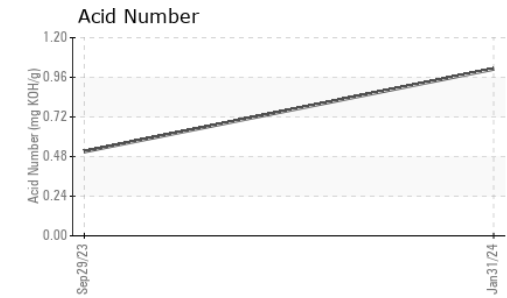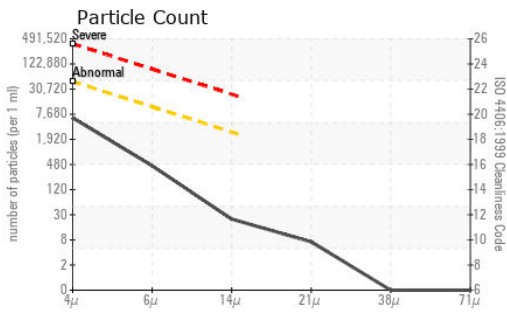

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : VCP452271
Lab Number : 06102908
Unique Number : 10901138
Test Package : MOB 2

Received : 28 Feb 2024
Tested : 29 Feb 2024
Diagnosed : 29 Feb 2024 - Wes Davis

ALTA EQUIPMENT/FLAGLER CONSTRUCTION EQUIPMENT LLC
 8418 PALM RIVER ROAD
 TAMPA, FL
 US 33619
 Contact: JOHN FARDELLA
 john.fardella@altg.com
 T: (813)630-0077
 F: (813)630-2233

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)