



WEAR	<b>NORMAL</b>
CONTAMINATION	<b>NORMAL</b>
FLUID CONDITION	<b>NORMAL</b>

Machine Id  
**JOHN DEERE 848L 1DW848LBANF713291**

Component  
**Front Differential**

Fluid  
**JOHN DEERE HY-GARD HYD/TRANS (28 GAL)**

### RECOMMENDATION

Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		<b>JR0201254</b>	JR0182475	JR0176775
Sample Date		Client Info		<b>26 Feb 2024</b>	08 Sep 2023	20 Jul 2023
Machine Age	hrs	Client Info		<b>2009</b>	1537	1378
Oil Age	hrs	Client Info		<b>959</b>	646	891
Filter Age	hrs	Client Info		<b>500</b>	159	891
Oil Changed		Client Info		<b>Changed</b>	Not Changd	Not Changd
Filter Changed		Client Info		<b>Changed</b>	Changed	Changed
Sample Status				<b>NORMAL</b>	NORMAL	NORMAL

### WEAR

All component wear rates are normal.

PQ		ASTM D8184		<b>12</b>	10	91
Iron	ppm	ASTM D5185m	>500	<b>11</b>	15	24
Chromium	ppm	ASTM D5185m	>10	<b>0</b>	0	<1
Nickel	ppm	ASTM D5185m	>10	<b>0</b>	0	0
Titanium	ppm	ASTM D5185m		<b>0</b>	0	0
Silver	ppm	ASTM D5185m		<b>0</b>	0	0
Aluminum	ppm	ASTM D5185m	>25	<b>&lt;1</b>	<1	1
Lead	ppm	ASTM D5185m	>25	<b>&lt;1</b>	<1	0
Copper	ppm	ASTM D5185m	>100	<b>&lt;1</b>	<1	5
Tin	ppm	ASTM D5185m	>10	<b>&lt;1</b>	0	0
Vanadium	ppm	ASTM D5185m		<b>0</b>	<1	0
White Metal	scalar	*Visual	NONE	<b>NONE</b>	NONE	MODER
Yellow Metal	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE

### CONTAMINATION







There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185m	>75	<b>3</b>	4	4
Potassium	ppm	ASTM D5185m	>20	<b>&lt;1</b>	<1	<1
Water		WC Method	>.2	<b>NEG</b>	NEG	NEG
Silt	scalar	*Visual	NONE	<b>NONE</b>	NONE	LIGHT
Debris	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Appearance	scalar	*Visual	NORML	<b>NORML</b>	NORML	NORML
Odor	scalar	*Visual	NORML	<b>NORML</b>	NORML	NORML
Emulsified Water	scalar	*Visual	>.2	<b>NEG</b>	NEG	NEG

### FLUID CONDITION

The condition of the oil is acceptable for the time in service.

Sodium	ppm	ASTM D5185m		<b>2</b>	2	2
Boron	ppm	ASTM D5185m	6	<b>&lt;1</b>	0	0
Barium	ppm	ASTM D5185m	0	<b>&lt;1</b>	0	0
Molybdenum	ppm	ASTM D5185m	0	<b>&lt;1</b>	<1	<1
Manganese	ppm	ASTM D5185m		<b>1</b>	2	4
Magnesium	ppm	ASTM D5185m	145	<b>96</b>	97	105
Calcium	ppm	ASTM D5185m	3570	<b>3309</b>	3533	3644
Phosphorus	ppm	ASTM D5185m	1290	<b>963</b>	1000	1046
Zinc	ppm	ASTM D5185m	1640	<b>1184</b>	1251	1299
Sulfur	ppm	ASTM D5185m		<b>3311</b>	3985	4223
Visc @ 40°C	cSt	ASTM D445	57.0	<b>54.4</b>	53.0	53.3

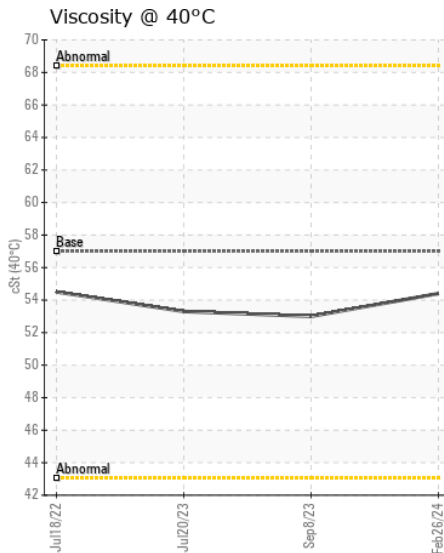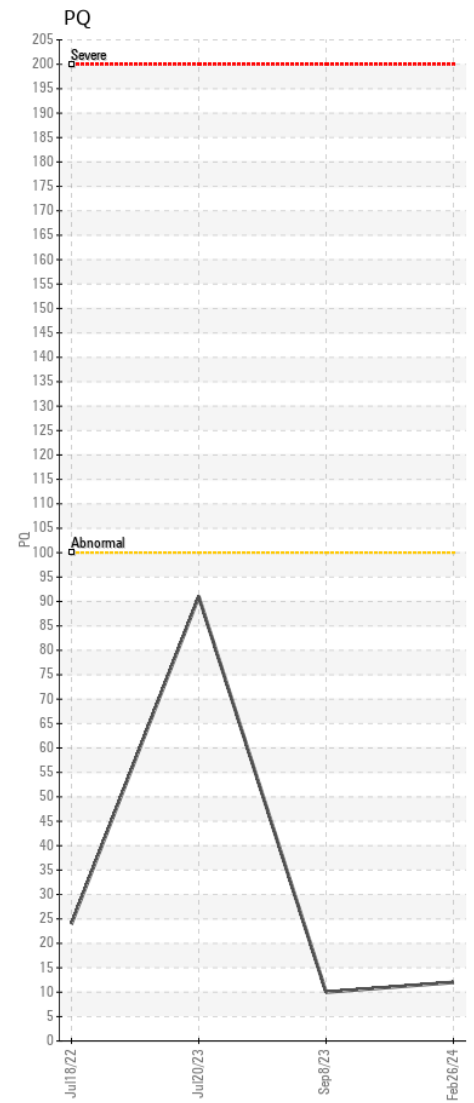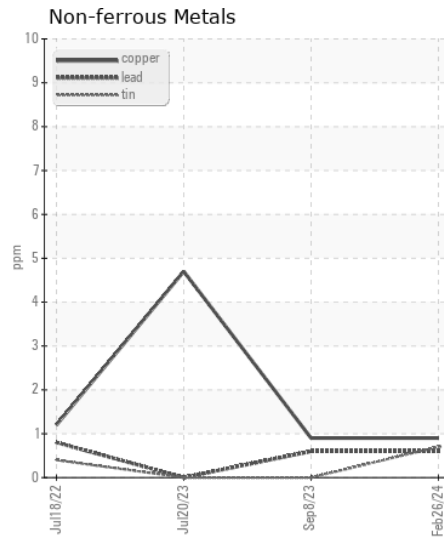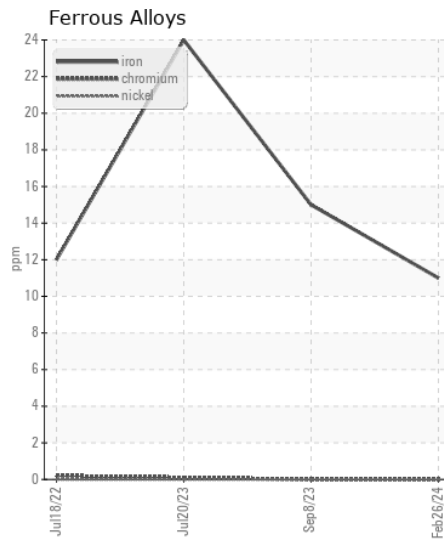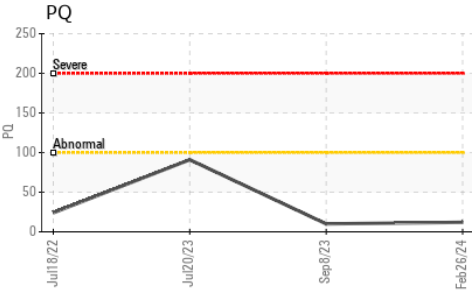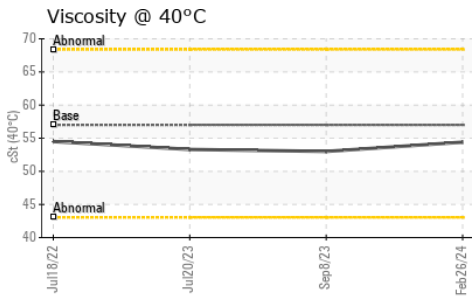

Certificate L2367

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513

**Sample No.** : JR0201254

**Lab Number** : 06103210

**Unique Number** : 10901440

**Test Package** : CONST ( Additional Tests: PQ )

**Received** : 28 Feb 2024

**Tested** : 01 Mar 2024

**Diagnosed** : 01 Mar 2024 - Wes Davis

**JRE - NEW BERN**

3816 MARTIN LUTHER KING BLVD

NEW BERN, NC

US 28562

Contact: NEW BERN SHOP

nick.etherdridge@jamesriverequipment.com;canastasio@wearcheckusa.com

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T:

F: