



WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL

Area

[05W45125]

Machine Id

JOHN DEERE 1FF300GXALF731581

Component

Pump Drive

Fluid

JOHN DEERE ENGINE OIL PLUS 50 II 15W40 (1 QTS)

RECOMMENDATION

Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		JR0208529	JR0187652	JR0166709
Sample Date		Client Info		27 Feb 2024	02 Oct 2023	04 Apr 2023
Machine Age	hrs	Client Info		3963	3458	2951
Oil Age	hrs	Client Info		1000	507	2471
Filter Age	hrs	Client Info		0	0	0
Oil Changed		Client Info		Changed	Not Chngd	Changed
Filter Changed		Client Info		N/A	N/A	N/A
Sample Status				NORMAL	NORMAL	NORMAL

WEAR

All component wear rates are normal.

PQ	UOM	Method	Limit/Abn	Current	History1	History2
PQ		ASTM D8184		21	12	18
Iron	ppm	ASTM D5185m	>151	34	30	48
Chromium	ppm	ASTM D5185m	>11	0	<1	<1
Nickel	ppm	ASTM D5185m	>10	0	<1	0
Titanium	ppm	ASTM D5185m		0	<1	0
Silver	ppm	ASTM D5185m		0	0	0
Aluminum	ppm	ASTM D5185m	>21	2	3	2
Lead	ppm	ASTM D5185m	>51	0	0	0
Copper	ppm	ASTM D5185m	>51	0	<1	<1
Tin	ppm	ASTM D5185m	>4	<1	0	0
Vanadium	ppm	ASTM D5185m		0	<1	<1
White Metal	scalar	*Visual	NONE	NONE	NONE	LIGHT
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	NONE

CONTAMINATION







There is no indication of any contamination in the oil.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Silicon	ppm	ASTM D5185m	>31	25	13	17
Potassium	ppm	ASTM D5185m	>20	<1	2	<1
Water		WC Method	>0.1	NEG	NEG	NEG
Silt	scalar	*Visual	NONE	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.1	NEG	NEG	NEG

FLUID CONDITION

The condition of the oil is acceptable for the time in service.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sodium	ppm	ASTM D5185m	>51	2	<1	2
Boron	ppm	ASTM D5185m		214	311	304
Barium	ppm	ASTM D5185m		0	0	2
Molybdenum	ppm	ASTM D5185m		198	268	258
Manganese	ppm	ASTM D5185m		<1	<1	2
Magnesium	ppm	ASTM D5185m		656	798	834
Calcium	ppm	ASTM D5185m		1245	1424	1513
Phosphorus	ppm	ASTM D5185m		869	978	976
Zinc	ppm	ASTM D5185m		862	1091	1099
Sulfur	ppm	ASTM D5185m		2738	3547	4119
Visc @ 40°C	cSt	ASTM D445	117	65.5	70.6	63.9

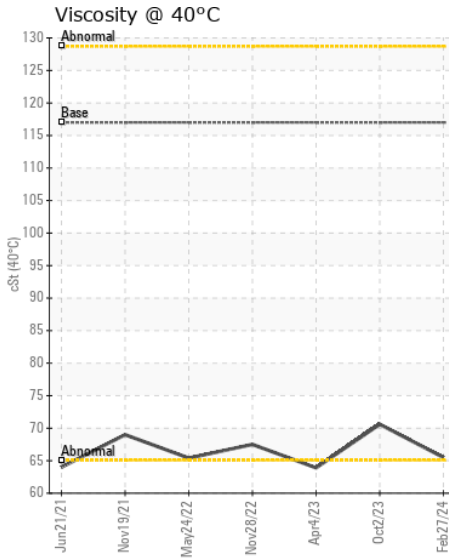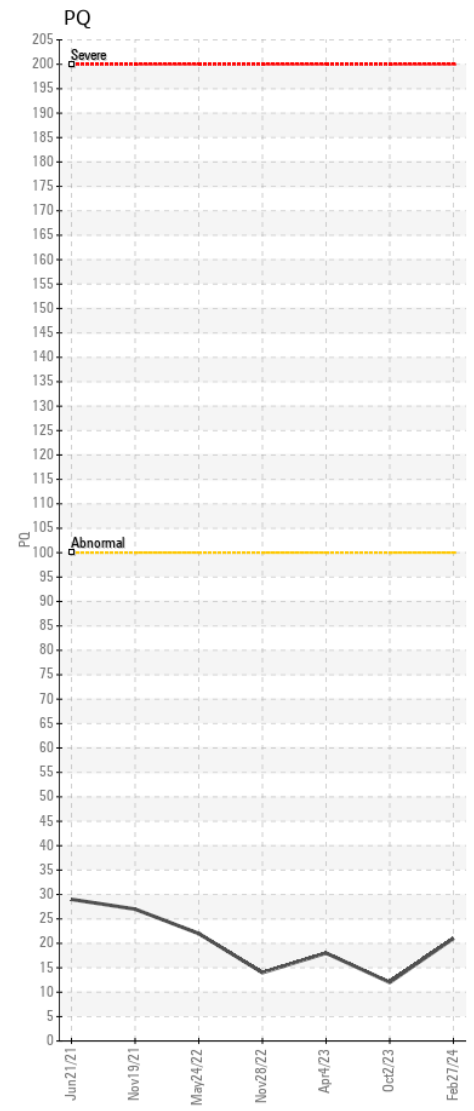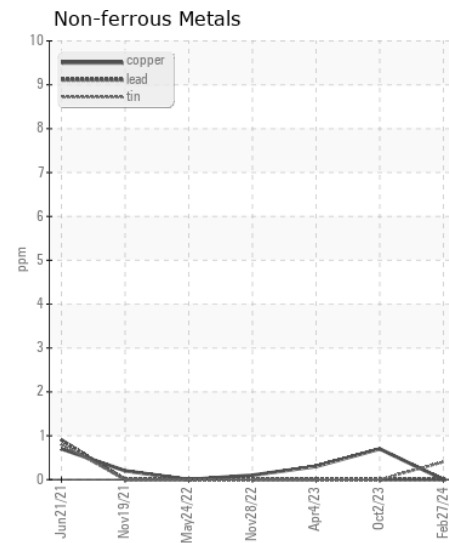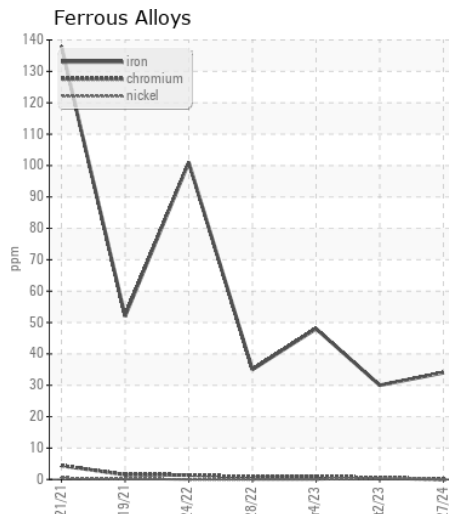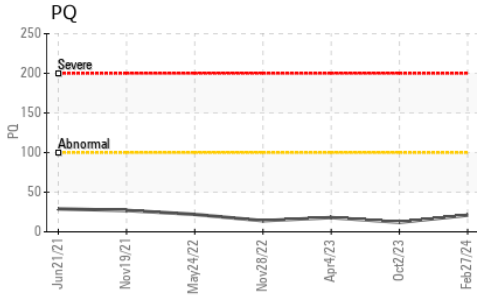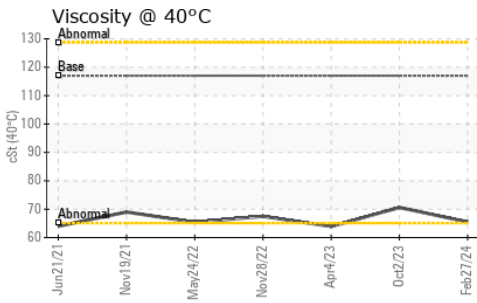

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : JR0208529 **Received** : 28 Feb 2024
Lab Number : 06103212 **Tested** : 01 Mar 2024
Unique Number : 10901442 **Diagnosed** : 01 Mar 2024 - Wes Davis
Test Package : CONST (Additional Tests: PQ)

FITZGERALD EXCAVATING
 PO BOX 2168
 WINCHESTER, VA
 US 22604
 Contact: Service Manager

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T:
F: