



WEAR	<b>NORMAL</b>
CONTAMINATION	<b>NORMAL</b>
FLUID CONDITION	<b>NORMAL</b>

Machine Id  
**JOHN DEERE 350G 1FF350GXAKF814265**  
 Component  
**Swing Drive Gear Case**  
 Fluid  
**JOHN DEERE GL-5 80W90 (3 GAL)**

### RECOMMENDATION

Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		<b>JR0201136</b>	JR0193548	JR0189509
Sample Date		Client Info		<b>26 Feb 2024</b>	30 Nov 2023	18 Oct 2023
Machine Age	hrs	Client Info		<b>6524</b>	6125	5687
Oil Age	hrs	Client Info		<b>399</b>	1000	510
Filter Age	hrs	Client Info		<b>0</b>	1000	0
Oil Changed		Client Info		<b>Not Changd</b>	Changed	Not Changd
Filter Changed		Client Info		<b>N/A</b>	N/A	N/A
Sample Status				<b>NORMAL</b>	NORMAL	NORMAL

### WEAR

All component wear rates are normal.

PQ		ASTM D8184		<b>25</b>	28	19
Iron	ppm	ASTM D5185m	>200	<b>27</b>	36	29
Chromium	ppm	ASTM D5185m	>10	<b>0</b>	0	0
Nickel	ppm	ASTM D5185m	>10	<b>0</b>	0	0
Titanium	ppm	ASTM D5185m		<b>0</b>	0	0
Silver	ppm	ASTM D5185m		<b>0</b>	0	0
Aluminum	ppm	ASTM D5185m		<b>0</b>	<1	<1
Lead	ppm	ASTM D5185m		<b>0</b>	0	0
Copper	ppm	ASTM D5185m		<b>0</b>	0	<1
Tin	ppm	ASTM D5185m		<b>&lt;1</b>	<1	0
Vanadium	ppm	ASTM D5185m		<b>0</b>	0	0
White Metal	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE

### CONTAMINATION







There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185m		<b>3</b>	4	5
Potassium	ppm	ASTM D5185m	>20	<b>&lt;1</b>	<1	<1
Water		WC Method	>0.2	<b>NEG</b>	NEG	NEG
Silt	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Debris	scalar	*Visual	NONE	<b>NONE</b>	LIGHT	NONE
Sand/Dirt	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Appearance	scalar	*Visual	NORML	<b>NORML</b>	NORML	NORML
Odor	scalar	*Visual	NORML	<b>NORML</b>	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	<b>NEG</b>	NEG	NEG

### FLUID CONDITION

The condition of the oil is acceptable for the time in service.

Sodium	ppm	ASTM D5185m		<b>&lt;1</b>	0	1
Boron	ppm	ASTM D5185m		<b>49</b>	88	88
Barium	ppm	ASTM D5185m		<b>2</b>	0	0
Molybdenum	ppm	ASTM D5185m		<b>0</b>	0	0
Manganese	ppm	ASTM D5185m		<b>0</b>	<1	<1
Magnesium	ppm	ASTM D5185m		<b>&lt;1</b>	2	0
Calcium	ppm	ASTM D5185m		<b>32</b>	112	101
Phosphorus	ppm	ASTM D5185m		<b>1936</b>	1772	1609
Zinc	ppm	ASTM D5185m		<b>7</b>	24	0
Sulfur	ppm	ASTM D5185m		<b>25828</b>	24843	22354
Visc @ 40°C	cSt	ASTM D445		<b>143</b>	140	141

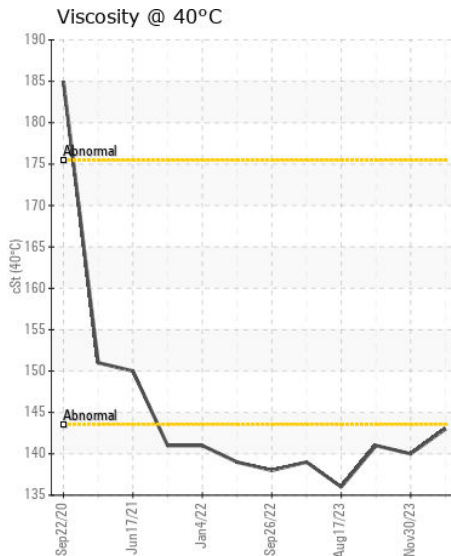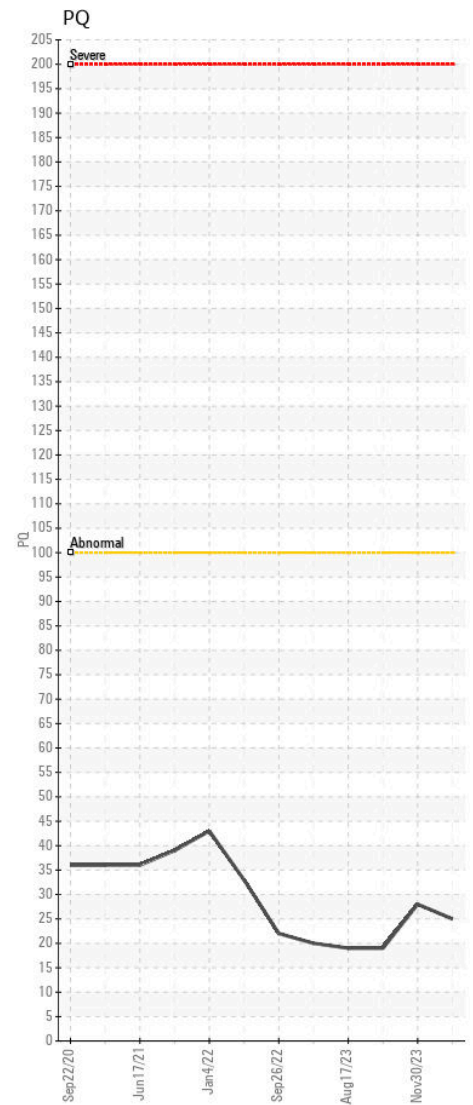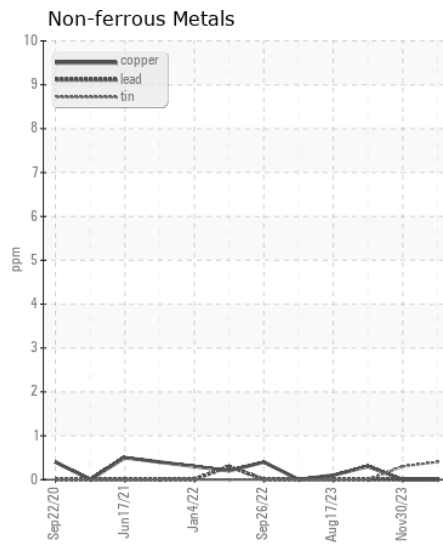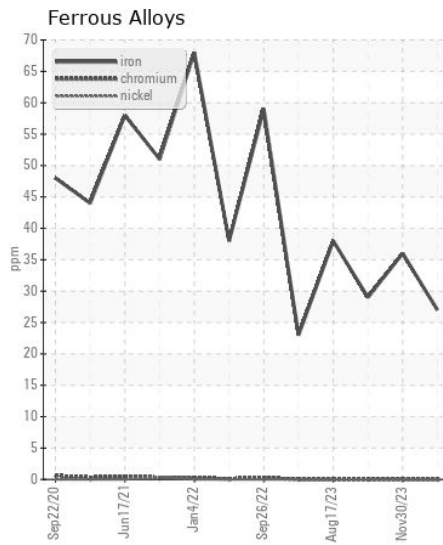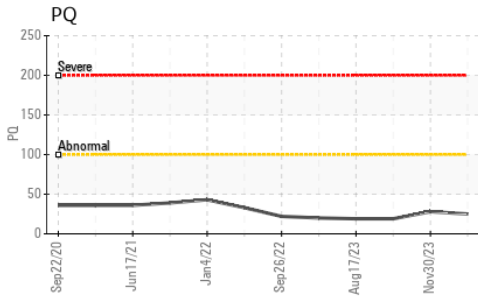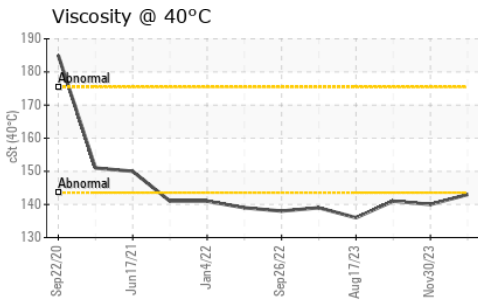

Certificate L2367

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : JR0201136 **Received** : 28 Feb 2024  
**Lab Number** : 06103243 **Tested** : 01 Mar 2024  
**Unique Number** : 10901473 **Diagnosed** : 01 Mar 2024 - Don Baldrige  
**Test Package** : CONST ( Additional Tests: PQ )

**JRE - NEW BERN**  
 3816 MARTIN LUTHER KING BLVD  
 NEW BERN, NC  
 US 28562  
 Contact: NEW BERN SHOP  
 nick.etherdridge@jamesriverequipment.com; canastasio@wearcheckusa.com

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T:  
F: