



OIL ANALYSIS REPORT

WEAR	<b>NORMAL</b>
CONTAMINATION	<b>NORMAL</b>
FLUID CONDITION	<b>NORMAL</b>

Area  
**Store 9 - Marietta [RO#147037]**  
 Machine Id  
**JOHN DEERE 950K 1T0950KPVJF335361**  
 Component  
**Left Outer Final Drive**  
 Fluid  
**JOHN DEERE HY-GARD HYD/TRANS (8 GAL)**

**RECOMMENDATION**

Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		<b>LEC0048235</b>	LEC0043597	LEC0040570
Sample Date		Client Info		<b>22 Feb 2024</b>	16 Oct 2023	09 Jun 2023
Machine Age	hrs	Client Info		<b>3900</b>	3246	2611
Oil Age	hrs	Client Info		<b>654</b>	1145	510
Filter Age	hrs	Client Info		<b>0</b>	0	0
Oil Changed		Client Info		<b>Changed</b>	Changed	Not Changd
Filter Changed		Client Info		<b>N/A</b>	N/A	N/A
Sample Status				<b>NORMAL</b>	NORMAL	NORMAL

**WEAR**

All component wear rates are normal.

PQ		ASTM D8184	>1250	<b>25</b>	21	21
Iron	ppm	ASTM D5185m	>750	<b>15</b>	27	11
Chromium	ppm	ASTM D5185m	>9	<b>&lt;1</b>	<1	0
Nickel	ppm	ASTM D5185m	>10	<b>&lt;1</b>	0	0
Titanium	ppm	ASTM D5185m		<b>&lt;1</b>	<1	0
Silver	ppm	ASTM D5185m		<b>0</b>	0	0
Aluminum	ppm	ASTM D5185m	>40	<b>1</b>	2	<1
Lead	ppm	ASTM D5185m	>15	<b>0</b>	0	<1
Copper	ppm	ASTM D5185m	>40	<b>0</b>	<1	0
Tin	ppm	ASTM D5185m	>10	<b>0</b>	0	0
Vanadium	ppm	ASTM D5185m		<b>0</b>	<1	<1
White Metal	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE

**CONTAMINATION**







There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185m	>75	<b>8</b>	8	5
Potassium	ppm	ASTM D5185m	>20	<b>1</b>	2	<1
Water		WC Method	>0.075	<b>NEG</b>	NEG	NEG
Silt	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Debris	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Appearance	scalar	*Visual	NORML	<b>NORML</b>	NORML	NORML
Odor	scalar	*Visual	NORML	<b>NORML</b>	NORML	NORML
Emulsified Water	scalar	*Visual	>0.075	<b>NEG</b>	NEG	NEG

**FLUID CONDITION**

The condition of the oil is acceptable for the time in service.

Sodium	ppm	ASTM D5185m	>51	<b>&lt;1</b>	0	<1
Boron	ppm	ASTM D5185m	6	<b>&lt;1</b>	8	4
Barium	ppm	ASTM D5185m	0	<b>0</b>	<1	0
Molybdenum	ppm	ASTM D5185m	0	<b>1</b>	<1	<1
Manganese	ppm	ASTM D5185m		<b>&lt;1</b>	0	0
Magnesium	ppm	ASTM D5185m	145	<b>98</b>	121	107
Calcium	ppm	ASTM D5185m	3570	<b>3432</b>	4110	3518
Phosphorus	ppm	ASTM D5185m	1290	<b>937</b>	1200	1043
Zinc	ppm	ASTM D5185m	1640	<b>1238</b>	1489	1276
Sulfur	ppm	ASTM D5185m		<b>3600</b>	5371	4460
Visc @ 40°C	cSt	ASTM D445	57.0	<b>54.9</b>	55.8	57.0

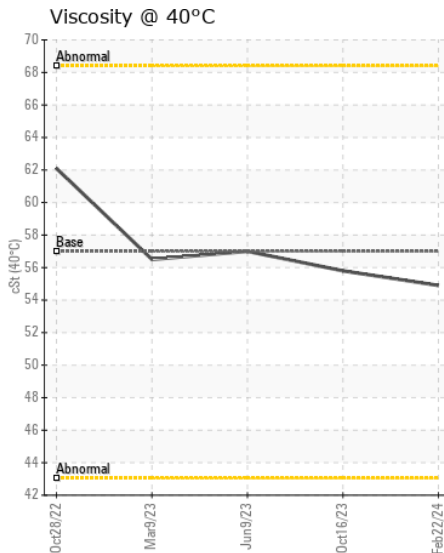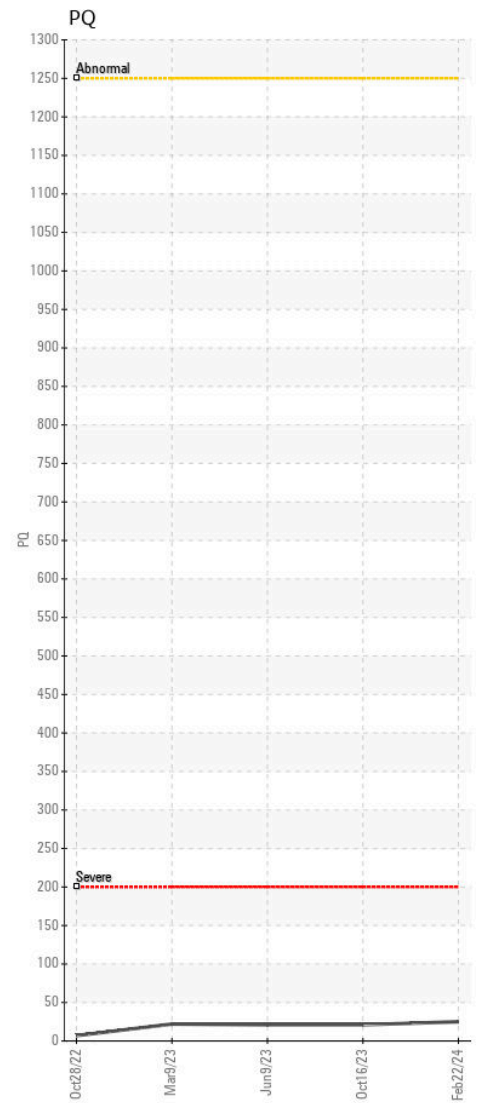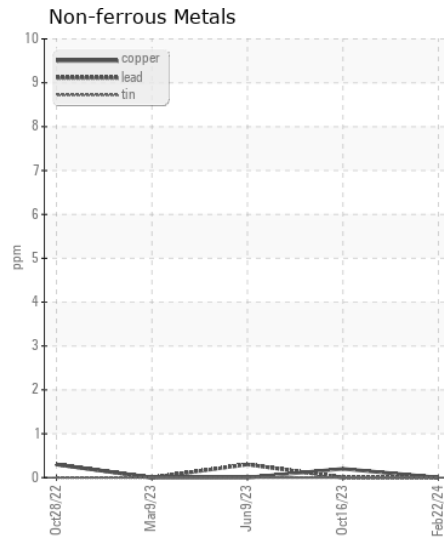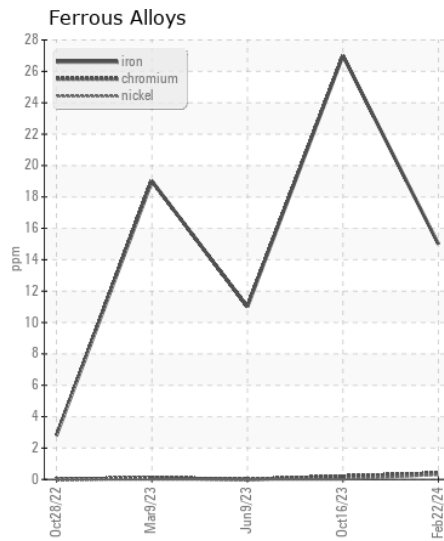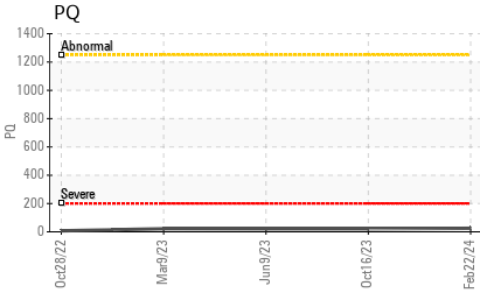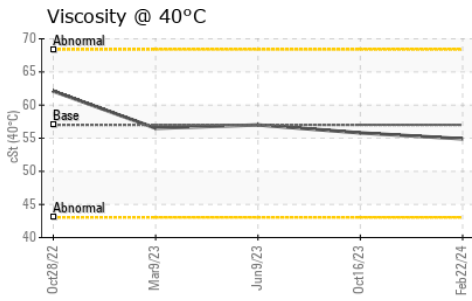

Certificate L2367

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : LEC0048235 **Received** : 28 Feb 2024  
**Lab Number** : 06103269 **Tested** : 01 Mar 2024  
**Unique Number** : 10901499 **Diagnosed** : 01 Mar 2024 - Wes Davis  
**Test Package** : CONST ( Additional Tests: PQ )

**LESLIE EQUIPMENT COMPANY**  
 105 TENNIS CENTER DR.  
 MARIETTA, OH  
 US 45750-9765  
 Contact: LEANNE KENDALL  
 KendalLeanne@lec1.com

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T:  
F: (740)373-5570