



OIL ANALYSIS REPORT

WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL

Machine Id
FREIGHTLINER 10465
Component
Diesel Engine
Fluid
SHELL ROTELLA T 15W40 (48 QTS)

RECOMMENDATION

Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		WC0904935	WC0795923	WC0722790
Sample Date		Client Info		15 Feb 2024	05 Sep 2023	12 Dec 2022
Machine Age	mls	Client Info		581873	513343	486897
Oil Age	mls	Client Info		0	0	2000
Filter Age	mls	Client Info		0	0	2000
Oil Changed		Client Info		Changed	Changed	Changed
Filter Changed		Client Info		Changed	Changed	Changed
Sample Status				NORMAL	NORMAL	NORMAL

WEAR

All component wear rates are normal.

Iron	ppm	ASTM D5185m	>80	32	27	5
Chromium	ppm	ASTM D5185m	>5	6	4	<1
Nickel	ppm	ASTM D5185m	>2	0	0	<1
Titanium	ppm	ASTM D5185m		<1	0	0
Silver	ppm	ASTM D5185m	>3	0	0	0
Aluminum	ppm	ASTM D5185m	>30	17	6	2
Lead	ppm	ASTM D5185m	>30	0	0	1
Copper	ppm	ASTM D5185m	>150	22	64	42
Tin	ppm	ASTM D5185m	>5	<1	0	<1
Vanadium	ppm	ASTM D5185m		0	0	0
White Metal	scalar	*Visual	NONE	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	NONE

CONTAMINATION







There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185m	>20	6	4	2
Potassium	ppm	ASTM D5185m	>20	3	2	2
Fuel		WC Method	>5	<1.0	<1.0	<1.0
Water		WC Method	>0.2	NEG	NEG	NEG
Glycol		WC Method		NEG	NEG	NEG
Soot %	%	*ASTM D7844	>3	0.3	0.4	0.1
Nitration	Abs/cm	*ASTM D7624	>20	8.6	9.5	5.8
Sulfation	Abs/.1mm	*ASTM D7415	>30	19.8	19.6	20.3
Silt	scalar	*Visual	NONE	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG	NEG

FLUID CONDITION

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

Sodium	ppm	ASTM D5185m		2	1	1
Boron	ppm	ASTM D5185m	316	13	2	2
Barium	ppm	ASTM D5185m	0.0	0	0	0
Molybdenum	ppm	ASTM D5185m	1.2	99	62	58
Manganese	ppm	ASTM D5185m		1	<1	<1
Magnesium	ppm	ASTM D5185m	24	952	963	969
Calcium	ppm	ASTM D5185m	2292	1250	1146	1120
Phosphorus	ppm	ASTM D5185m	1064	1115	863	1071
Zinc	ppm	ASTM D5185m	1160	1323	1215	1286
Sulfur	ppm	ASTM D5185m	4996	3348	3446	3745
Oxidation	Abs/.1mm	*ASTM D7414	>25	16.0	15.4	14.8
Base Number (BN)	mg KOH/g	ASTM D2896	10.1	8.1	7.6	11.1
Visc @ 100°C	cSt	ASTM D445	15.7	13.2	13.3	13.4

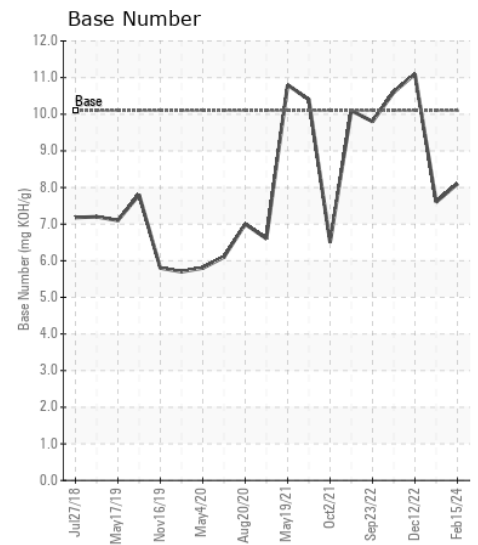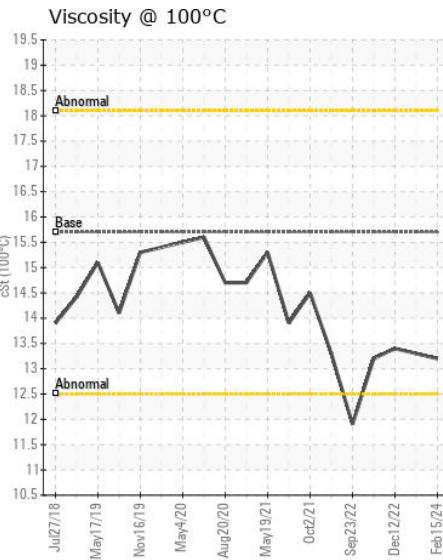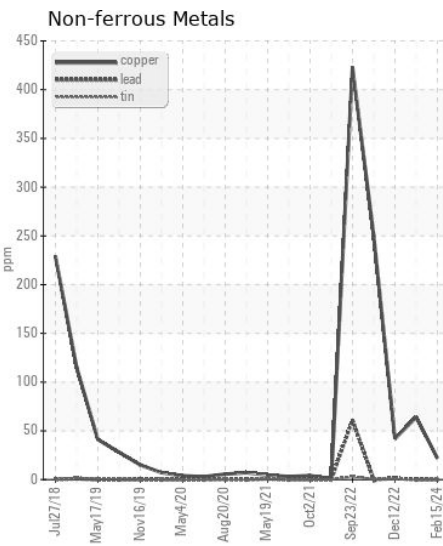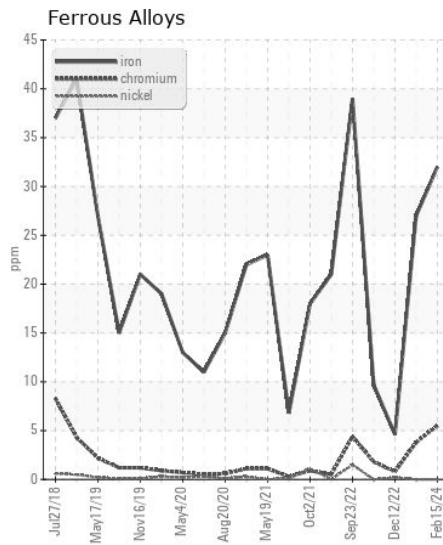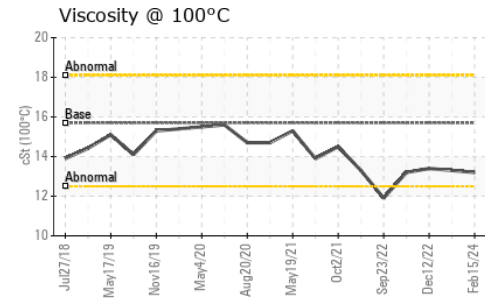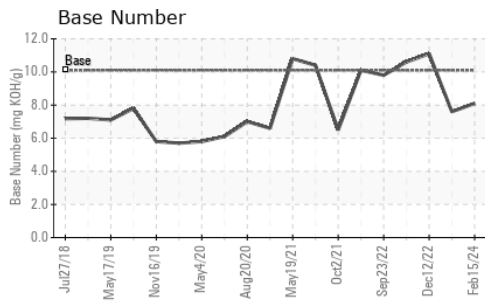

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : WC0904935
Lab Number : 06103579
Unique Number : 10901809
Test Package : FLEET

Received : 28 Feb 2024
Tested : 02 Mar 2024
Diagnosed : 02 Mar 2024 - Don Baldrige

SALEM NATIONALEASE CORPORATION
 198 PARK PLAZA DRIVE
 WINSTON SALEM, NC
 US 27105

Contact: Audrey Hopkins
 Audrey.Hopkins@salemcorp.com
 T: (336)767-9642

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

F: x: