



WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL

Area
PB SHAH
Machine Id
[PB SHAH] 010 566553-10
Component
Steering
Fluid
CHEVRON RANDO HDZ 68 (--- GAL)

RECOMMENDATION

Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		MW0060015	MW0037481	MW0022279
Sample Date		Client Info		01 Nov 2023	16 Apr 2022	14 Oct 2021
Machine Age	hrs	Client Info		0	0	0
Oil Age	hrs	Client Info		0	0	0
Filter Age	hrs	Client Info		0	0	0
Oil Changed		Client Info		N/A	N/A	N/A
Filter Changed		Client Info		N/A	N/A	N/A
Sample Status				NORMAL	NORMAL	NORMAL

WEAR

All component wear rates are normal.

Iron	ppm	ASTM D5185m	>50	0	<1	<1
Chromium	ppm	ASTM D5185m	>15	0	0	<1
Nickel	ppm	ASTM D5185m	>5	<1	0	0
Titanium	ppm	ASTM D5185m		0	0	0
Silver	ppm	ASTM D5185m		0	<1	1
Aluminum	ppm	ASTM D5185m	>5	0	0	0
Lead	ppm	ASTM D5185m	>10	3	<1	1
Copper	ppm	ASTM D5185m	>50	31	30	26
Tin	ppm	ASTM D5185m	>5	2	<1	<1
Vanadium	ppm	ASTM D5185m		<1	0	0
White Metal	scalar	*Visual	NONE	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	NONE

CONTAMINATION










The system cleanliness is acceptable for your target ISO 4406 cleanliness code. The system and fluid cleanliness is acceptable.

Silicon	ppm	ASTM D5185m	>15	<1	<1	<1
Potassium	ppm	ASTM D5185m	>20	<1	0	0
Water		WC Method	>0.2	NEG	NEG	NEG
Particles >4µm		ASTM D7647		1452	1547	358
Particles >6µm		ASTM D7647	>1300	179	115	70
Particles >14µm		ASTM D7647	>160	7	12	8
Particles >21µm		ASTM D7647	>40	0	3	2
Particles >38µm		ASTM D7647	>10	0	0	0
Particles >71µm		ASTM D7647	>3	0	0	0
Oil Cleanliness		ISO 4406 (c)	>-/17/14	18/15/10	18/14/11	16/13/10
Silt	scalar	*Visual	NONE	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG	NEG

FLUID CONDITION

The AN level is acceptable for this fluid. The condition of the fluid is suitable for further service.

Sodium	ppm	ASTM D5185m		<1	1	<1
Boron	ppm	ASTM D5185m	0	4	7	8
Barium	ppm	ASTM D5185m	0	0	0	0
Molybdenum	ppm	ASTM D5185m	0	<1	1	1
Manganese	ppm	ASTM D5185m		0	0	0
Magnesium	ppm	ASTM D5185m	0	2	2	5
Calcium	ppm	ASTM D5185m	75	73	73	81
Phosphorus	ppm	ASTM D5185m	275	403	401	366
Zinc	ppm	ASTM D5185m	350	517	434	471
Sulfur	ppm	ASTM D5185m	550	1121	927	983
Acid Number (AN)	mg KOH/g	ASTM D8045		0.49	0.28	0.290
Visc @ 40°C	cSt	ASTM D445	68.0	68.2	68.1	68.5

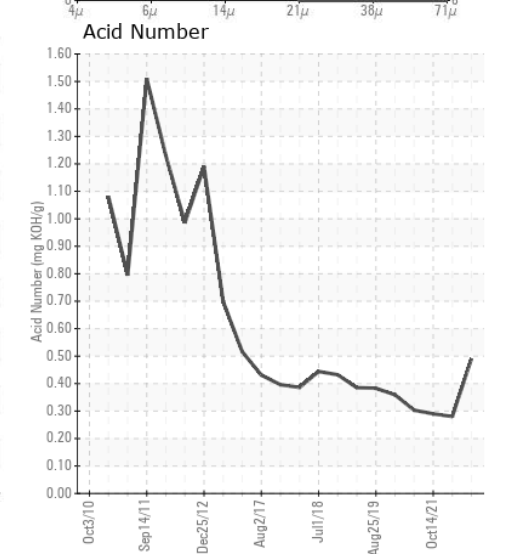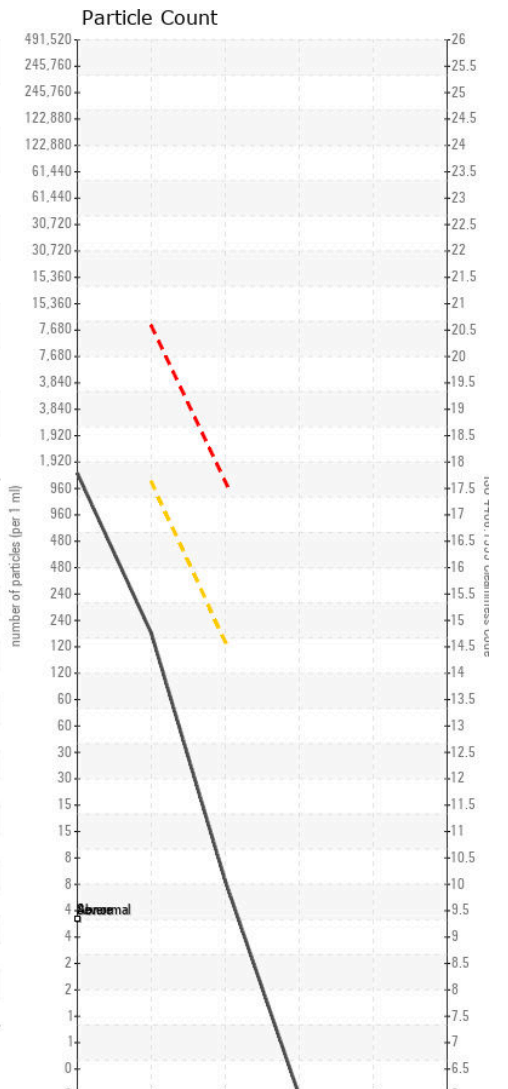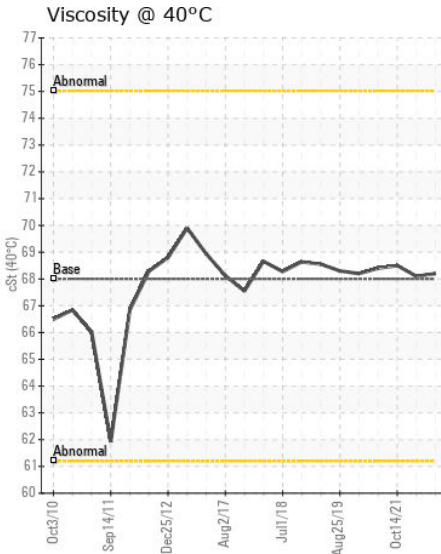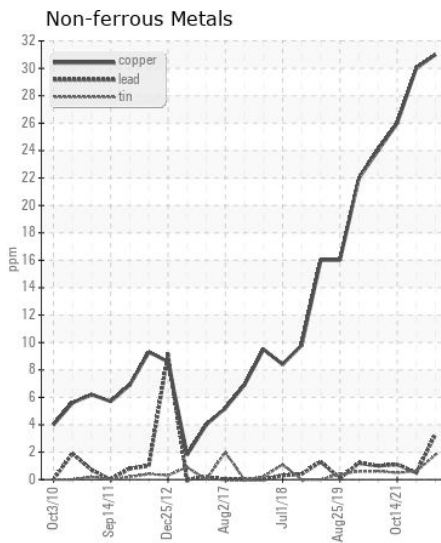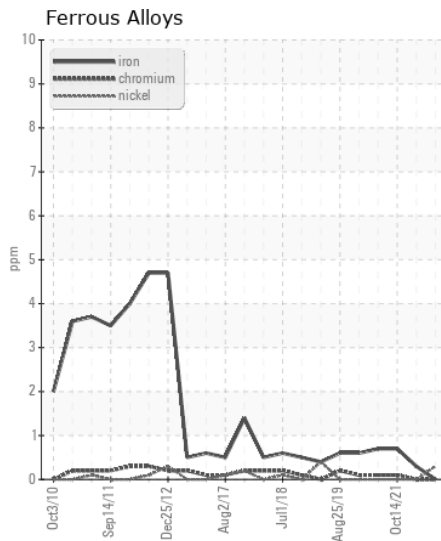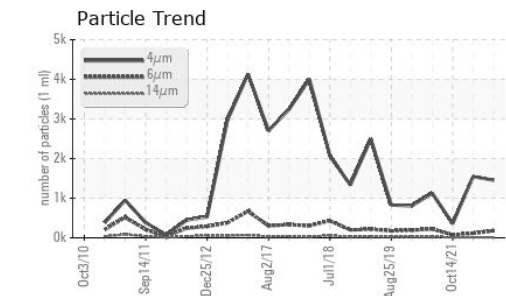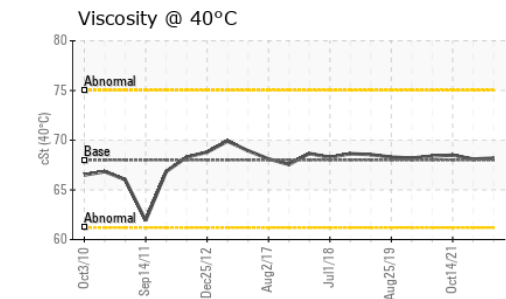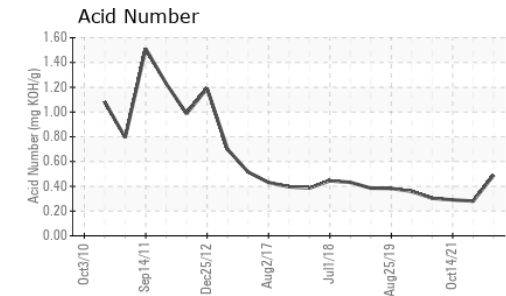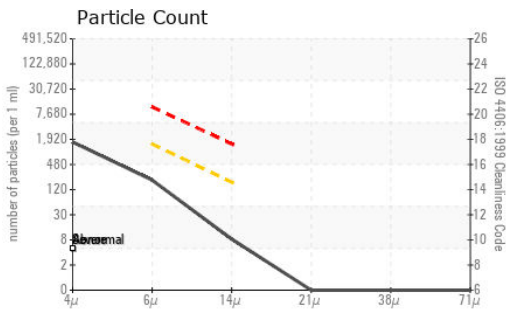

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : MW0060015 **Received** : 28 Feb 2024
Lab Number : 06103657 **Tested** : 29 Feb 2024
Unique Number : 10901887 **Diagnosed** : 01 Mar 2024 - Don Baldrige
Test Package : MAR 2 (Additional Tests: PrtCount)

INGRAM BARGE
 900 S 3RD ST
 PADUCAH, KY
 US 42003
 Contact: JUSTIN WHEELER
 justin.wheeler@ingrambargo.com
 T:
 F: (615)695-3697

Certificate L2367
 To discuss this sample report, contact Customer Service at 1-800-237-1369.
 * - Denotes test methods that are outside of the ISO 17025 scope of accreditation.
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)