



WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL

Area
OH INGRAM
Machine Id
[OH INGRAM] 003 645896-3
Component
Starboard Main Engine
Fluid
CHEVRON DELO 710 LE (200 GAL)

RECOMMENDATION

Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		MW0064750	MW0058415	MW0058407
Sample Date		Client Info		01 Jan 2024	01 Dec 2023	01 Nov 2023
Machine Age	hrs	Client Info		27956	27212	26520
Oil Age	hrs	Client Info		27956	27212	26520
Filter Age	hrs	Client Info		472	27212	491
Oil Changed		Client Info		Not Changd	Not Changd	Not Changd
Filter Changed		Client Info		Changed	None	Not Changd
Sample Status				NORMAL	NORMAL	NORMAL

WEAR

All component wear rates are normal.

Iron	ppm	ASTM D5185m	>75	9	9	8
Chromium	ppm	ASTM D5185m	>8	1	1	1
Nickel	ppm	ASTM D5185m	>2	<1	0	<1
Titanium	ppm	ASTM D5185m	>3	<1	0	0
Silver	ppm	ASTM D5185m	>2	0	0	0
Aluminum	ppm	ASTM D5185m	>15	2	2	2
Lead	ppm	ASTM D5185m	>18	6	4	5
Copper	ppm	ASTM D5185m	>80	12	13	15
Tin	ppm	ASTM D5185m	>14	5	4	4
Vanadium	ppm	ASTM D5185m		<1	0	0
White Metal	scalar	*Visual	NONE	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	NONE

CONTAMINATION







There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185m	>20	5	4	5
Potassium	ppm	ASTM D5185m	>20	2	<1	<1
Fuel		WC Method	>4.0	<1.0	<1.0	<1.0
Water		WC Method	>0.1	NEG	NEG	NEG
Glycol		WC Method		NEG	NEG	NEG
Soot %	%	*ASTM D7844	>3	0.4	0.5	0.6
Nitration	Abs/cm	*ASTM D7624	>20	9.0	8.8	9.1
Sulfation	Abs/.1mm	*ASTM D7415	>30	16.4	16.6	16.9
Silt	scalar	*Visual	NONE	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.1	NEG	NEG	NEG

FLUID CONDITION

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

Sodium	ppm	ASTM D5185m	>75	15	11	18
Boron	ppm	ASTM D5185m		38	36	38
Barium	ppm	ASTM D5185m		0	0	0
Molybdenum	ppm	ASTM D5185m		45	45	45
Manganese	ppm	ASTM D5185m		<1	<1	<1
Magnesium	ppm	ASTM D5185m		13	13	15
Calcium	ppm	ASTM D5185m		3788	3489	3476
Phosphorus	ppm	ASTM D5185m		3	3	6
Zinc	ppm	ASTM D5185m	10	8	0	0
Sulfur	ppm	ASTM D5185m		2399	2426	2452
Oxidation	Abs/.1mm	*ASTM D7414	>25	9.4	9.2	9.2
Base Number (BN)	mg KOH/g	ASTM D2896	9.2	8.96	9.51	9.12
Visc @ 100°C	cSt	ASTM D445	15.5	14.7	14.7	14.7

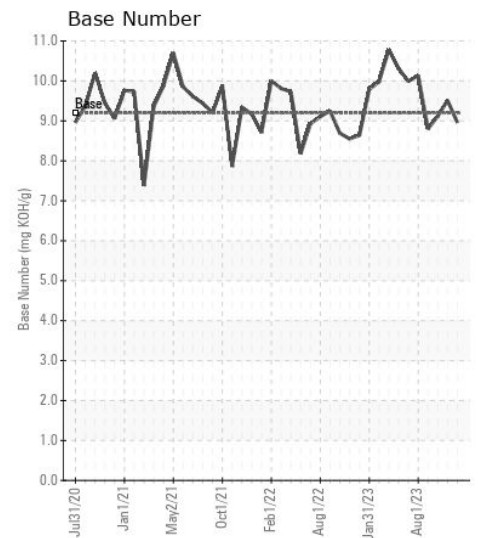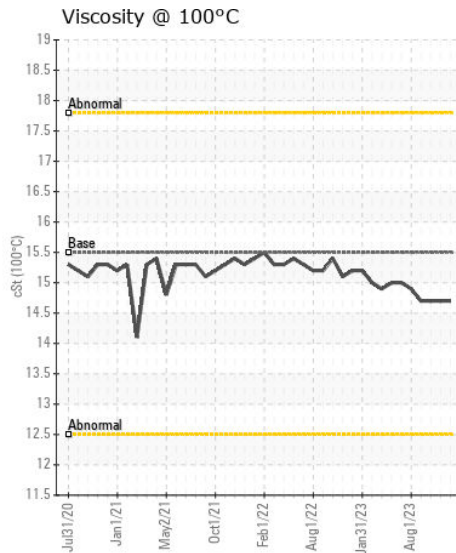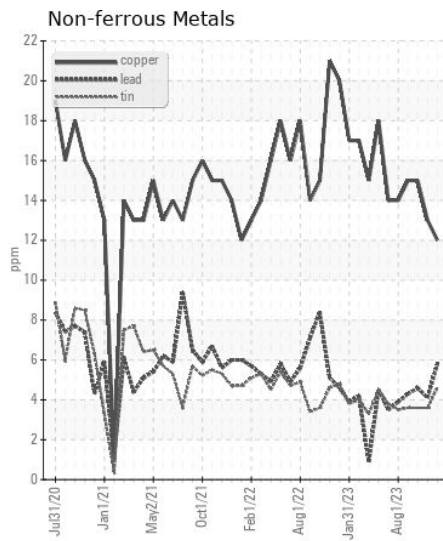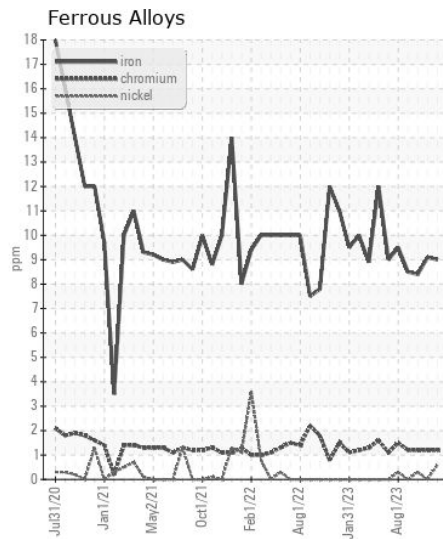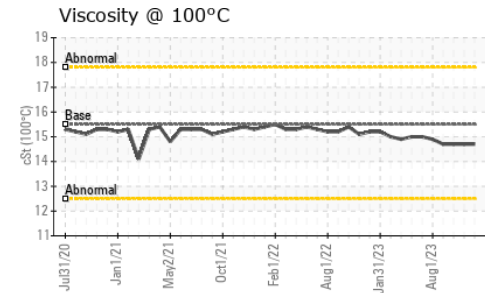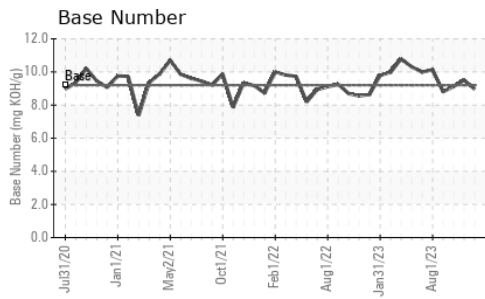

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513

Sample No. : MW0064750

Lab Number : 06103826

Unique Number : 10902056

Test Package : MAR 2

Received : 28 Feb 2024

Tested : 29 Feb 2024

Diagnosed : 29 Feb 2024 - Wes Davis

INGRAM BARGE

900 S 3RD ST

PADUCAH, KY

US 42003

Contact: ALLEN WILLHELM

allen.willhelm@ingrambarga.com

T: (270)415-4467

F: (615)695-3697

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)