



WEAR	ABNORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL

Machine Id
HAMM HI2IP H284-0286
Component
Right Vibratory Drum Gearbox
Fluid
WIRTGEN (--- QTS)

RECOMMENDATION

The oil change at the time of sampling has been noted. No corrective action is recommended at this time. Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		JR0203181	---	---
Sample Date		Client Info		28 Feb 2024	---	---
Machine Age	hrs	Client Info		1935	---	---
Oil Age	hrs	Client Info		0	---	---
Filter Age	hrs	Client Info		0	---	---
Oil Changed		Client Info		Changed	---	---
Filter Changed		Client Info		N/A	---	---
Sample Status				ABNORMAL	---	---

WEAR

Gear wear is indicated. All other component wear rates are normal.

PQ		ASTM D8184		66	---	---
Iron	ppm	ASTM D5185m	>200	▲ 314	---	---
Chromium	ppm	ASTM D5185m	>10	2	---	---
Nickel	ppm	ASTM D5185m	>10	2	---	---
Titanium	ppm	ASTM D5185m		8	---	---
Silver	ppm	ASTM D5185m		1	---	---
Aluminum	ppm	ASTM D5185m		3	---	---
Lead	ppm	ASTM D5185m		2	---	---
Copper	ppm	ASTM D5185m		82	---	---
Tin	ppm	ASTM D5185m		1	---	---
Vanadium	ppm	ASTM D5185m		<1	---	---
White Metal	scalar	*Visual	NONE	NONE	---	---
Yellow Metal	scalar	*Visual	NONE	NONE	---	---

CONTAMINATION








There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185m		21	---	---
Potassium	ppm	ASTM D5185m	>20	2	---	---
Water		WC Method	>0.2	NEG	---	---
Silt	scalar	*Visual	NONE	NONE	---	---
Debris	scalar	*Visual	NONE	NONE	---	---
Sand/Dirt	scalar	*Visual	NONE	NONE	---	---
Appearance	scalar	*Visual	NORML	NORML	---	---
Odor	scalar	*Visual	NORML	NORML	---	---
Emulsified Water	scalar	*Visual	>0.2	NEG	---	---

FLUID CONDITION

The condition of the oil is acceptable for the time in service.

Sodium	ppm	ASTM D5185m		2	---	---
Boron	ppm	ASTM D5185m		104	---	---
Barium	ppm	ASTM D5185m		8	---	---
Molybdenum	ppm	ASTM D5185m		4	---	---
Manganese	ppm	ASTM D5185m		2	---	---
Magnesium	ppm	ASTM D5185m		10	---	---
Calcium	ppm	ASTM D5185m		60	---	---
Phosphorus	ppm	ASTM D5185m		1222	---	---
Zinc	ppm	ASTM D5185m		123	---	---
Sulfur	ppm	ASTM D5185m		31467	---	---
Visc @ 40°C	cSt	ASTM D445		106	---	---

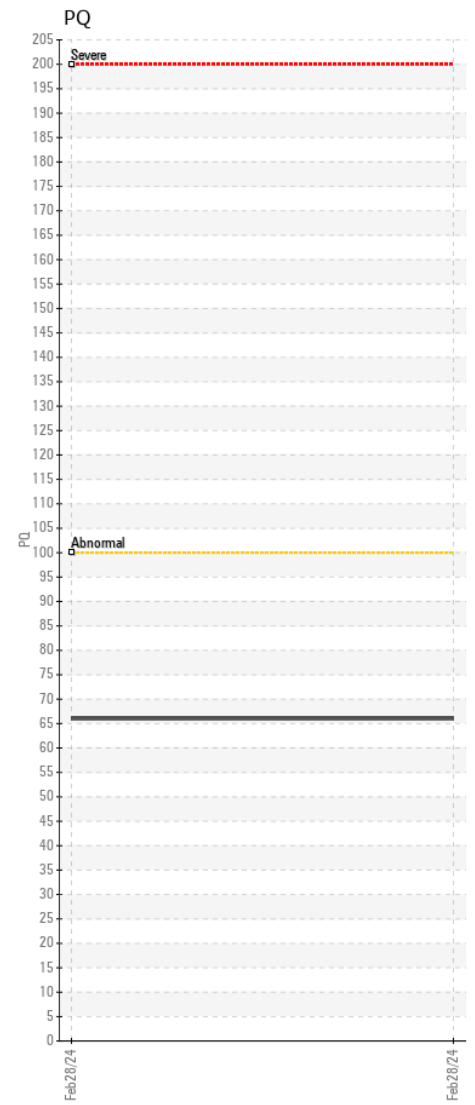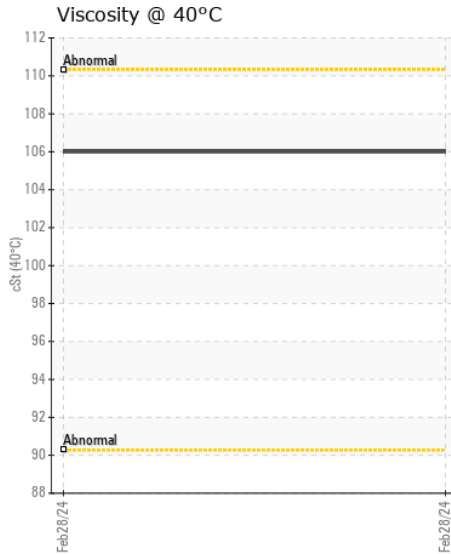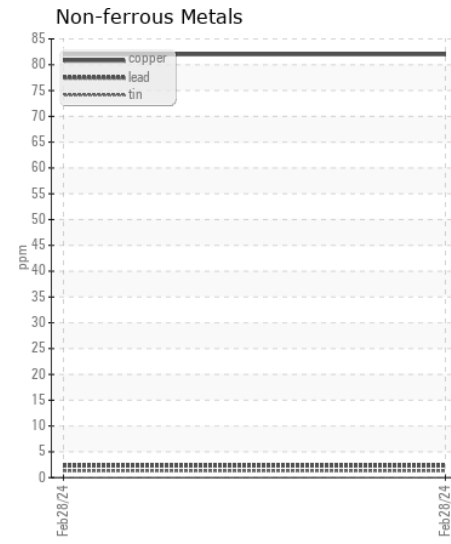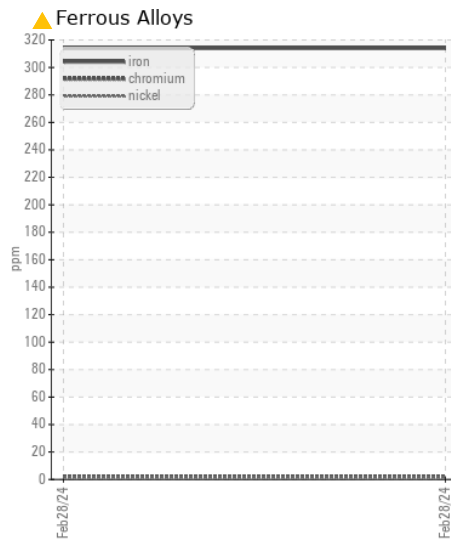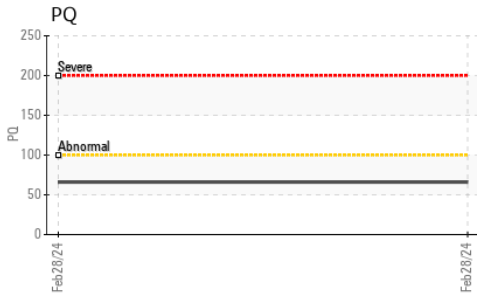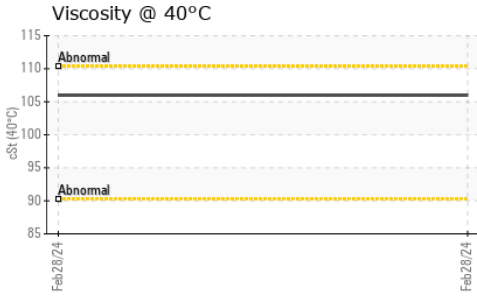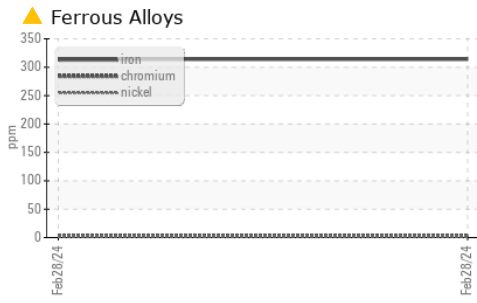

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : JR0203181 **Received** : 28 Feb 2024
Lab Number : 06103837 **Tested** : 29 Feb 2024
Unique Number : 10902067 **Diagnosed** : 01 Mar 2024 - Don Baldrige
Test Package : CONST (Additional Tests: PQ)

B & S SITE DEVELOPMENT
 7800 PINEY BRANCH LANE
 BRISTOW, VA
 US 20136
 Contact: DANNY HUFF
 dhuff@bandssite.com
 T: (540)270-3203
 F: (703)753-0605

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)