



McCLUNG-LOGAN
EQUIPMENT COMPANY, INC.

OIL ANALYSIS REPORT

WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL



Area
[W/O 10396]
Machine Id
VOLVO A30G 742580
Component
Rear Axle
Fluid
VOLVO SUPER GEAR OIL 75W-80-GO102 (8 GAL)

RECOMMENDATION

Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		ML0000059	---	---
Sample Date		Client Info		26 Feb 2024	---	---
Machine Age	hrs	Client Info		4055	---	---
Oil Age	hrs	Client Info		4055	---	---
Filter Age	hrs	Client Info		0	---	---
Oil Changed		Client Info		Changed	---	---
Filter Changed		Client Info		N/A	---	---
Sample Status				NORMAL	---	---

WEAR

All component wear rates are normal.

Iron	ppm	ASTM D5185m	>900	626	---	---
Chromium	ppm	ASTM D5185m	>20	12	---	---
Nickel	ppm	ASTM D5185m	>10	6	---	---
Titanium	ppm	ASTM D5185m		<1	---	---
Silver	ppm	ASTM D5185m		0	---	---
Aluminum	ppm	ASTM D5185m	>30	2	---	---
Lead	ppm	ASTM D5185m	>50	<1	---	---
Copper	ppm	ASTM D5185m	>150	29	---	---
Tin	ppm	ASTM D5185m	>20	1	---	---
Vanadium	ppm	ASTM D5185m		<1	---	---
White Metal	scalar	*Visual	NONE	NONE	---	---
Yellow Metal	scalar	*Visual	NONE	NONE	---	---

CONTAMINATION





There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185m	>50	17	---	---
Potassium	ppm	ASTM D5185m	>20	6	---	---
Water		WC Method	>0.2	NEG	---	---
Silt	scalar	*Visual	NONE	NONE	---	---
Debris	scalar	*Visual	NONE	NONE	---	---
Sand/Dirt	scalar	*Visual	NONE	NONE	---	---
Appearance	scalar	*Visual	NORML	NORML	---	---
Odor	scalar	*Visual	NORML	NORML	---	---
Emulsified Water	scalar	*Visual	>0.2	NEG	---	---

FLUID CONDITION

The condition of the oil is acceptable for the time in service.

Sodium	ppm	ASTM D5185m		6	---	---
Boron	ppm	ASTM D5185m		170	---	---
Barium	ppm	ASTM D5185m		2	---	---
Molybdenum	ppm	ASTM D5185m		8	---	---
Manganese	ppm	ASTM D5185m		16	---	---
Magnesium	ppm	ASTM D5185m		2	---	---
Calcium	ppm	ASTM D5185m		49	---	---
Phosphorus	ppm	ASTM D5185m		1387	---	---
Zinc	ppm	ASTM D5185m		24	---	---
Sulfur	ppm	ASTM D5185m		27823	---	---
Visc @ 40°C	cSt	ASTM D445		61.5	---	---

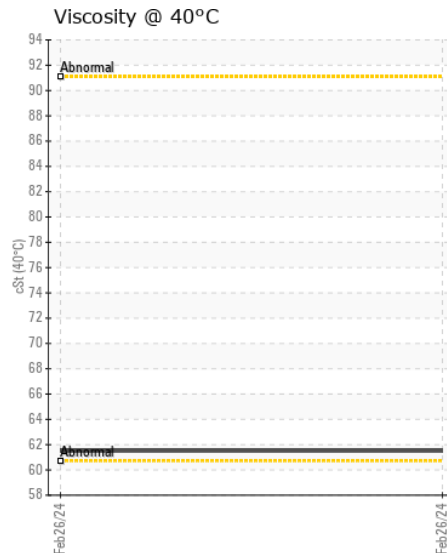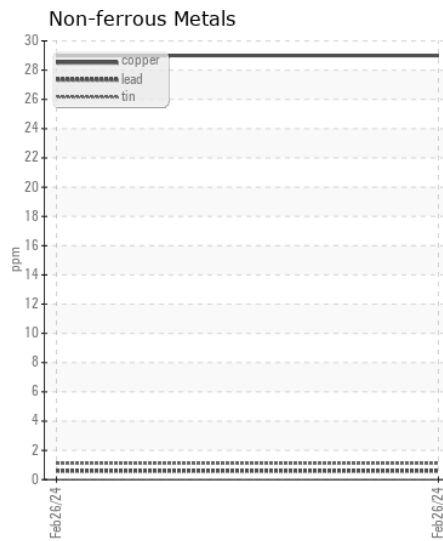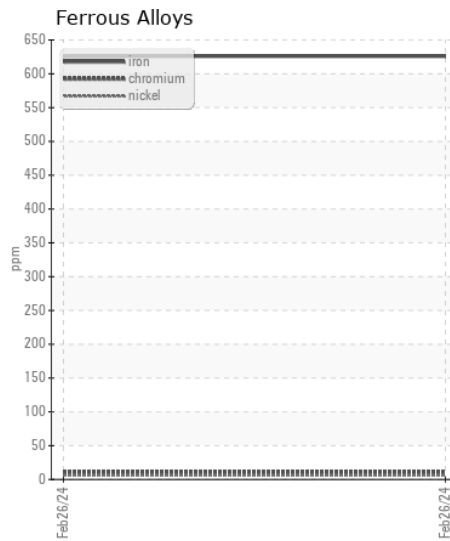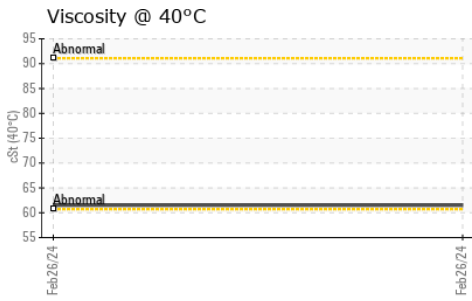

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513

Sample No. : ML0000059

Lab Number : 06103846

Unique Number : 10902076

Test Package : CONST

Received : 28 Feb 2024

Tested : 29 Feb 2024

Diagnosed : 01 Mar 2024 - Don Baldrige

RELIABLE CONTRACTING

2410 EVERGREEN RD SUITE 200

GAMBRILLS, MD

US 21054

Contact: RUSSELL HATFIELD

RHATFIELD@RELIABLECONTRACTING.COM

T: (410)987-1851

F:

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)