



OIL ANALYSIS REPORT

WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL

Machine Id
LIEBHERR LR 1600/2 CR 6606 (S/N 074 509)

Component
Rear Left Travel

Fluid
GEAR OIL ISO 220 (--- GAL)

RECOMMENDATION

Resample at the next service interval to monitor. The fluid was not specified, however, a fluid match indicates that this fluid is (GENERIC) GEAR OIL ISO 220. Please confirm.

WEAR

All component wear rates are normal.





CONTAMINATION

There is no indication of any contamination in the oil.

FLUID CONDITION

The condition of the oil is acceptable for the time in service.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		WC0873379	WCMC106188	---
Sample Date		Client Info		24 Feb 2024	22 Jan 2013	---
Machine Age	hrs	Client Info		17237	5600	---
Oil Age	hrs	Client Info		0	5600	---
Filter Age	hrs	Client Info		0	0	---
Oil Changed		Client Info		Changed	Changed	---
Filter Changed		Client Info		Not Changed	N/A	---
Sample Status				NORMAL	NORMAL	---
<hr/>						
Iron	ppm	ASTM D5185m	>500	72	31	---
Chromium	ppm	ASTM D5185m	>20	1	<1	---
Nickel	ppm	ASTM D5185m	>5	1	<1	---
Titanium	ppm	ASTM D5185m		<1	0	---
Silver	ppm	ASTM D5185m		0	<1	---
Aluminum	ppm	ASTM D5185m	>100	2	3	---
Lead	ppm	ASTM D5185m	>10	<1	<1	---
Copper	ppm	ASTM D5185m	>60	11	32	---
Tin	ppm	ASTM D5185m	>5	1	<1	---
Vanadium	ppm	ASTM D5185m		<1	0	---
White Metal	scalar	*Visual	NONE	NONE	NONE	---
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	---
<hr/>						
Silicon	ppm	ASTM D5185m	>150	11	17	---
Potassium	ppm	ASTM D5185m	>20	2	3	---
Water		WC Method	>0.2	NEG	NEG	---
Silt	scalar	*Visual	NONE	NONE	NONE	---
Debris	scalar	*Visual	NONE	NONE	NONE	---
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	---
Appearance	scalar	*Visual	NORML	NORML	NORML	---
Odor	scalar	*Visual	NORML	NORML	NORML	---
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG	---
<hr/>						
Sodium	ppm	ASTM D5185m		0	1	---
Boron	ppm	ASTM D5185m	50	30	22	---
Barium	ppm	ASTM D5185m	15	1	0	---
Molybdenum	ppm	ASTM D5185m	15	1	0	---
Manganese	ppm	ASTM D5185m		1	<1	---
Magnesium	ppm	ASTM D5185m	50	<1	<1	---
Calcium	ppm	ASTM D5185m	50	8	5	---
Phosphorus	ppm	ASTM D5185m	350	453	219	---
Zinc	ppm	ASTM D5185m	100	5	18	---
Sulfur	ppm	ASTM D5185m	12500	7679	3390	---
Visc @ 40°C	cSt	ASTM D445	220	224	229.4	---

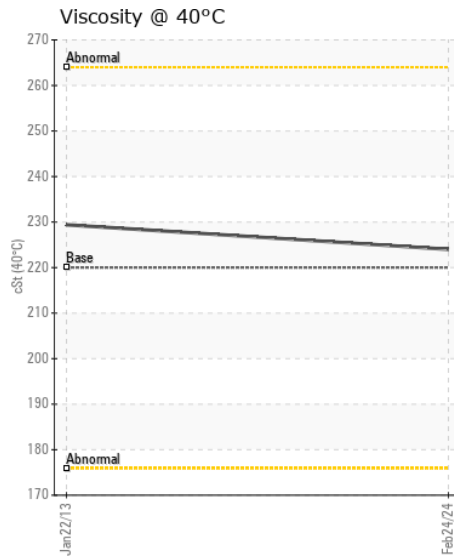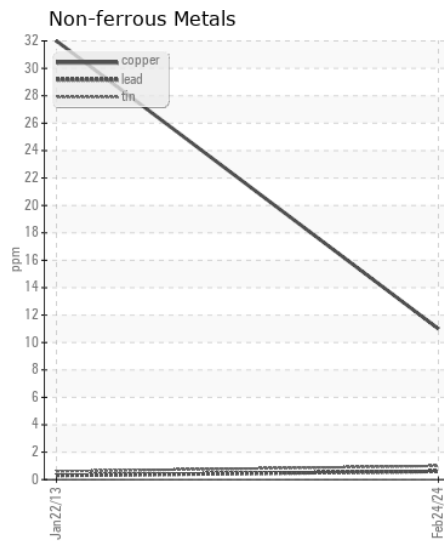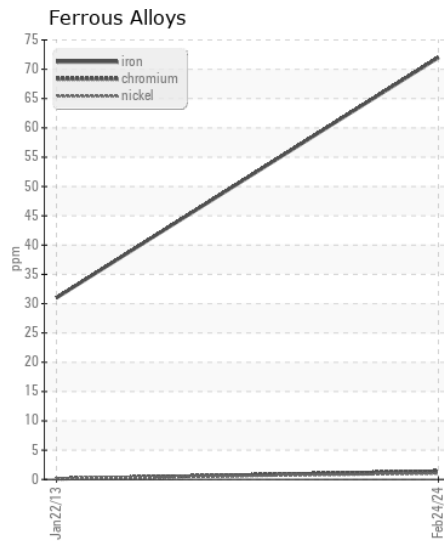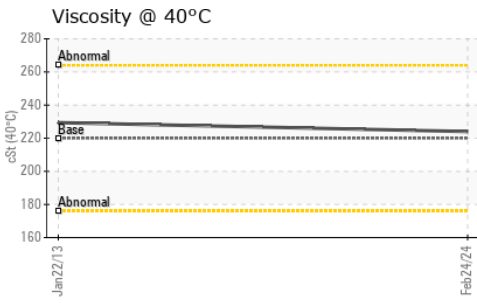

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : WC0873379
Lab Number : 06103863
Unique Number : 10902093
Test Package : CONST

Received : 28 Feb 2024
Tested : 29 Feb 2024
Diagnosed : 29 Feb 2024 - Wes Davis

BUCKNER HEAVY LIFT
 4732 NC 54 EAST
 GRAHAM, NC
 US 27253-9215

Contact: MICHAEL LAWSON
 michael@bucknercompanies.com

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T: (336)376-8888
 F: (336)376-4090