



WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL

Machine Id
JOHN DEERE TH-44

Component
Right Final Drive

Fluid
GEAR OIL SAE 80W90 (--- GAL)

RECOMMENDATION

Resample at the next service interval to monitor. Please specify the brand, type, and viscosity of the oil on your next sample.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		CL0005184	CL0003788	CL0003335
Sample Date		Client Info		26 Feb 2024	10 Dec 2022	23 Jun 2022
Machine Age	hrs	Client Info		2000	1440	985
Oil Age	hrs	Client Info		1015	0	0
Filter Age	hrs	Client Info		0	0	0
Oil Changed		Client Info		Changed	Not Changd	Changed
Filter Changed		Client Info		Changed	N/A	N/A
Sample Status				NORMAL	NORMAL	NORMAL

WEAR

All component wear rates are normal.

Iron	ppm	ASTM D5185m	>750	17	84	63
Chromium	ppm	ASTM D5185m	>9	<1	2	2
Nickel	ppm	ASTM D5185m	>10	<1	0	0
Titanium	ppm	ASTM D5185m		<1	<1	<1
Silver	ppm	ASTM D5185m		0	0	0
Aluminum	ppm	ASTM D5185m	>40	<1	1	1
Lead	ppm	ASTM D5185m	>15	<1	0	0
Copper	ppm	ASTM D5185m	>40	<1	<1	<1
Tin	ppm	ASTM D5185m	>10	<1	0	0
Vanadium	ppm	ASTM D5185m		<1	0	0
White Metal	scalar	*Visual	NONE	NONE	NONE	MODER
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	NONE

CONTAMINATION





There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185m	>75	5	17	17
Potassium	ppm	ASTM D5185m	>20	2	1	2
Water		WC Method	>0.075	NEG	NEG	NEG
Silt	scalar	*Visual	NONE	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.075	NEG	NEG	NEG

FLUID CONDITION

The condition of the oil is acceptable for the time in service.

Sodium	ppm	ASTM D5185m	>170	0	<1	<1
Boron	ppm	ASTM D5185m	400	12	62	60
Barium	ppm	ASTM D5185m	200	2	6	4
Molybdenum	ppm	ASTM D5185m	12	1	<1	<1
Manganese	ppm	ASTM D5185m		1	2	2
Magnesium	ppm	ASTM D5185m	12	<1	0	<1
Calcium	ppm	ASTM D5185m	150	25	24	20
Phosphorus	ppm	ASTM D5185m	1650	325	508	467
Zinc	ppm	ASTM D5185m	125	12	52	37
Sulfur	ppm	ASTM D5185m	22500	19132	17127	15934
Visc @ 40°C	cSt	ASTM D445	143	146	183	184

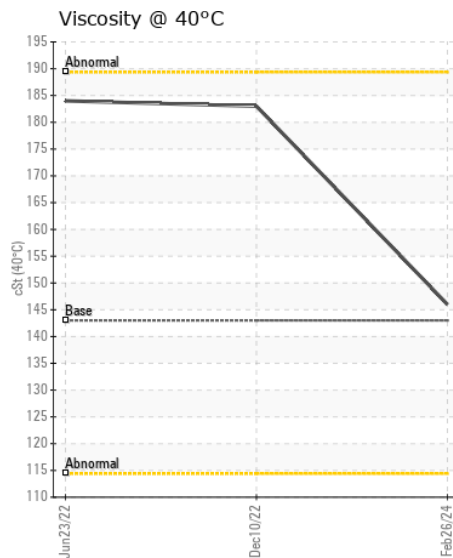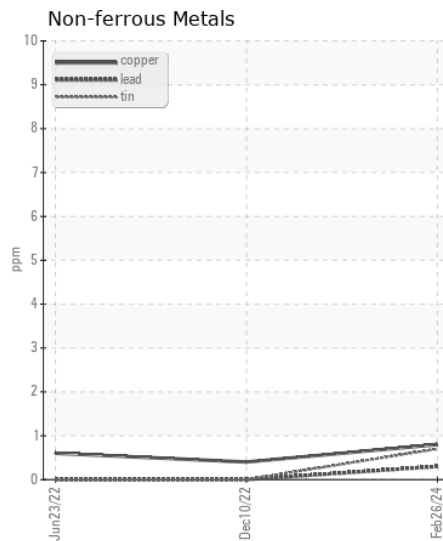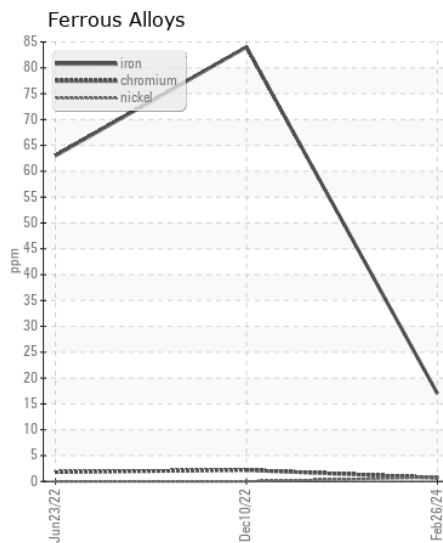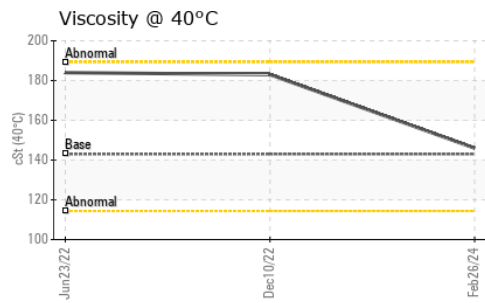

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : CL0005184
Lab Number : 06103920
Unique Number : 10902150
Test Package : CONST
Received : 28 Feb 2024
Tested : 29 Feb 2024
Diagnosed : 29 Feb 2024 - Wes Davis

PEDULLA
 146 MCLELLAND
 MOORESVILLE, NC
 US 28115
 Contact: LARRY

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T:
F: