



# OIL ANALYSIS REPORT

WEAR	<b>NORMAL</b>
CONTAMINATION	<b>NORMAL</b>
FLUID CONDITION	<b>NORMAL</b>

Machine Id  
**42471**  
Component  
**Hydrostatic**  
Fluid  
**SAE 10W (--- GAL)**

## RECOMMENDATION

Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		<b>DC0032972</b>	DC0019457	---
Sample Date		Client Info		<b>23 Feb 2024</b>	06 Apr 2022	---
Machine Age	mls	Client Info		<b>16689</b>	13339	---
Oil Age	mls	Client Info		<b>0</b>	0	---
Filter Age	mls	Client Info		<b>0</b>	0	---
Oil Changed		Client Info		<b>Changed</b>	Not Changd	---
Filter Changed		Client Info		<b>Changed</b>	Changed	---
Sample Status				<b>NORMAL</b>	NORMAL	---

## WEAR

All component wear rates are normal.

Iron	ppm	ASTM D5185m	>200	<b>6</b>	4	---
Chromium	ppm	ASTM D5185m	>10	<b>&lt;1</b>	<1	---
Nickel	ppm	ASTM D5185m		<b>&lt;1</b>	0	---
Titanium	ppm	ASTM D5185m		<b>&lt;1</b>	<1	---
Silver	ppm	ASTM D5185m		<b>0</b>	<1	---
Aluminum	ppm	ASTM D5185m	>50	<b>2</b>	2	---
Lead	ppm	ASTM D5185m	>50	<b>1</b>	1	---
Copper	ppm	ASTM D5185m	>200	<b>5</b>	4	---
Tin	ppm	ASTM D5185m	>10	<b>&lt;1</b>	<1	---
Vanadium	ppm	ASTM D5185m		<b>&lt;1</b>	0	---
White Metal	scalar	*Visual	NONE	<b>NONE</b>	NONE	---
Yellow Metal	scalar	*Visual	NONE	<b>NONE</b>	NONE	---

## CONTAMINATION










There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185m	>50	<b>9</b>	9	---
Potassium	ppm	ASTM D5185m	>20	<b>3</b>	1	---
Water		WC Method	>0.1	<b>NEG</b>	NEG	---
Silt	scalar	*Visual	NONE	<b>NONE</b>	NONE	---
Debris	scalar	*Visual	NONE	<b>NONE</b>	NONE	---
Sand/Dirt	scalar	*Visual	NONE	<b>NONE</b>	NONE	---
Appearance	scalar	*Visual	NORML	<b>NORML</b>	NORML	---
Odor	scalar	*Visual	NORML	<b>NORML</b>	NORML	---
Emulsified Water	scalar	*Visual	>0.1	<b>NEG</b>	NEG	---

## FLUID CONDITION

The condition of the oil is acceptable for the time in service.

Sodium	ppm	ASTM D5185m		<b>5</b>	7	---
Boron	ppm	ASTM D5185m		<b>86</b>	104	---
Barium	ppm	ASTM D5185m		<b>1</b>	0	---
Molybdenum	ppm	ASTM D5185m		<b>3</b>	2	---
Manganese	ppm	ASTM D5185m		<b>1</b>	<1	---
Magnesium	ppm	ASTM D5185m		<b>16</b>	20	---
Calcium	ppm	ASTM D5185m		<b>2978</b>	3810	---
Phosphorus	ppm	ASTM D5185m		<b>973</b>	1219	---
Zinc	ppm	ASTM D5185m		<b>1211</b>	1402	---
Sulfur	ppm	ASTM D5185m		<b>8836</b>	7643	---
Visc @ 40°C	cSt	ASTM D445	35.0	<b>47.6</b>	50.7	---

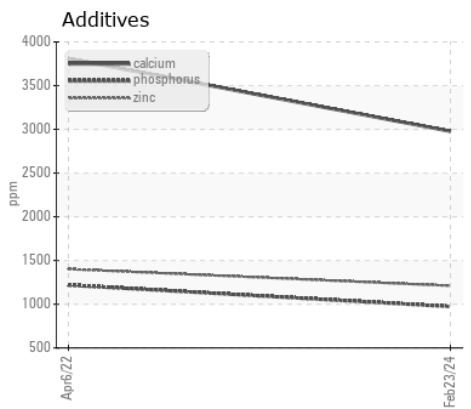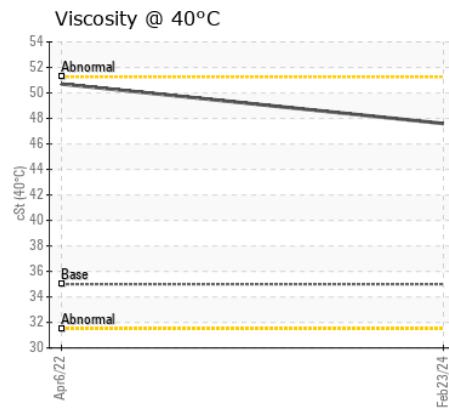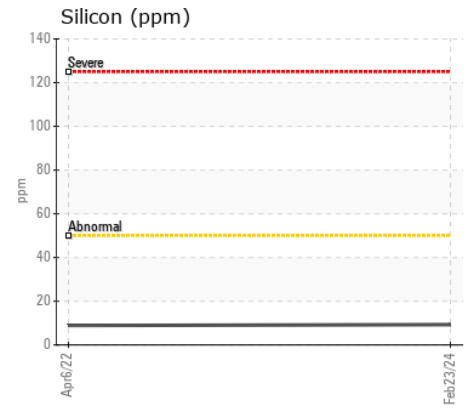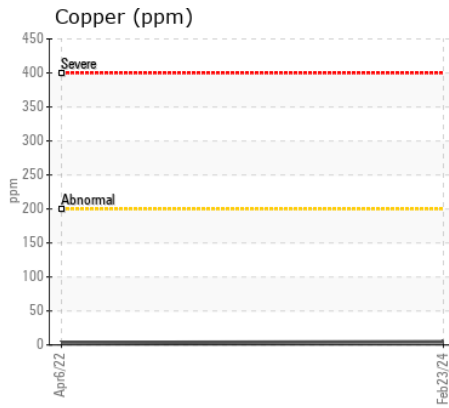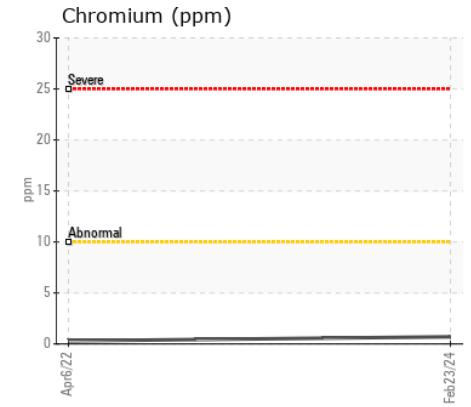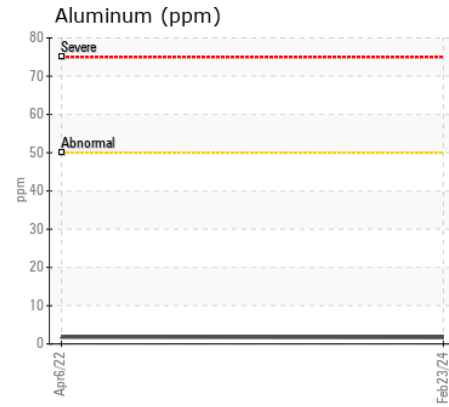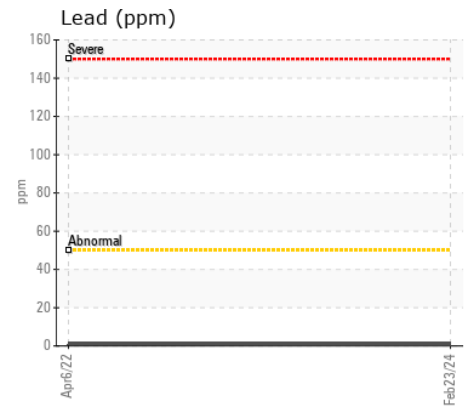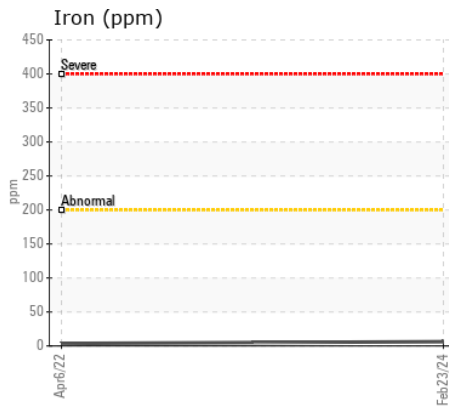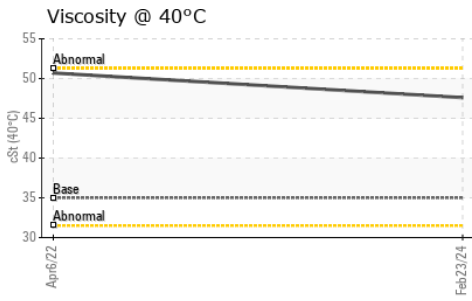

Certificate L2367

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : DC0032972  
**Lab Number** : 06103951  
**Unique Number** : 10902181  
**Test Package** : MOB 1  
**Received** : 28 Feb 2024  
**Tested** : 29 Feb 2024  
**Diagnosed** : 01 Mar 2024 - Don Baldrige

**FRANCIS O DAY**  
 14900 SOUTHLAWN LN  
 ROCKVILLE, MD  
 US 20850  
 Contact: JAMIE FORESTER

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T:  
F: