



WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL

Machine Id
120
Component
Transmission (Auto)
Fluid
DEXRON III (--- GAL)

RECOMMENDATION

Resample at the next service interval to monitor. The fluid was not specified, however, a fluid match indicates that this fluid is (GENERIC) DEXRON III. Please confirm.

WEAR

All component wear rates are normal.





CONTAMINATION

There is no indication of any contamination in the fluid.

FLUID CONDITION

The condition of the fluid is acceptable for the time in service.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		CL0005205	CL0004455	---
Sample Date		Client Info		25 Feb 2024	04 Jul 2023	---
Machine Age	hrs	Client Info		86320	55580	---
Oil Age	hrs	Client Info		86320	0	---
Filter Age	hrs	Client Info		0	0	---
Oil Changed		Client Info		Not Changed	Not Changed	---
Filter Changed		Client Info		Changed	Changed	---
Sample Status				NORMAL	NORMAL	---
Iron	ppm	ASTM D5185m	>160	94	64	---
Chromium	ppm	ASTM D5185m	>5	<1	<1	---
Nickel	ppm	ASTM D5185m	>5	<1	0	---
Titanium	ppm	ASTM D5185m		<1	<1	---
Silver	ppm	ASTM D5185m	>5	0	0	---
Aluminum	ppm	ASTM D5185m	>50	10	6	---
Lead	ppm	ASTM D5185m	>50	7	<1	---
Copper	ppm	ASTM D5185m	>225	36	20	---
Tin	ppm	ASTM D5185m	>10	1	<1	---
Vanadium	ppm	ASTM D5185m		<1	0	---
White Metal	scalar	*Visual	NONE	NONE	NONE	---
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	---
Silicon	ppm	ASTM D5185m	>20	7	4	---
Potassium	ppm	ASTM D5185m	>20	4	<1	---
Water		WC Method	>0.1	NEG	NEG	---
Silt	scalar	*Visual	NONE	NONE	NONE	---
Debris	scalar	*Visual	NONE	NONE	NONE	---
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	---
Appearance	scalar	*Visual	NORML	NORML	NORML	---
Odor	scalar	*Visual	NORML	NORML	NORML	---
Emulsified Water	scalar	*Visual	>0.1	NEG	NEG	---
Sodium	ppm	ASTM D5185m		8	6	---
Boron	ppm	ASTM D5185m		92	92	---
Barium	ppm	ASTM D5185m		2	0	---
Molybdenum	ppm	ASTM D5185m		1	0	---
Manganese	ppm	ASTM D5185m		7	4	---
Magnesium	ppm	ASTM D5185m		2	4	---
Calcium	ppm	ASTM D5185m		103	79	---
Phosphorus	ppm	ASTM D5185m		270	214	---
Zinc	ppm	ASTM D5185m		10	12	---
Sulfur	ppm	ASTM D5185m		1749	1386	---
Visc @ 40°C	cSt	ASTM D445	35.0	32.9	33.3	---

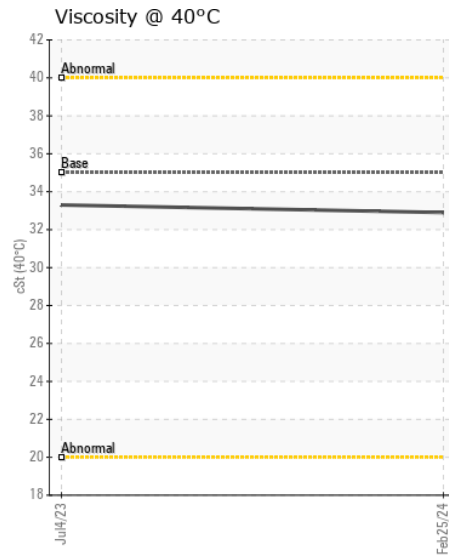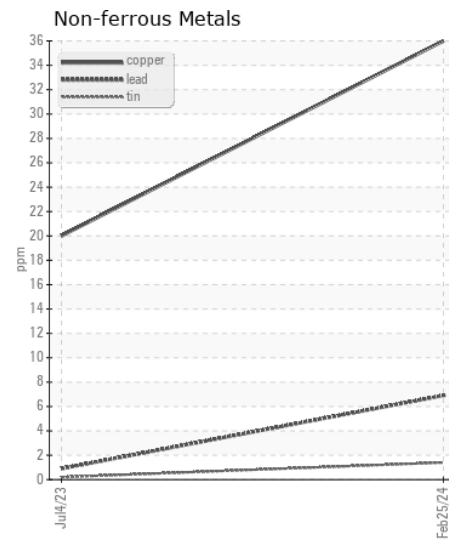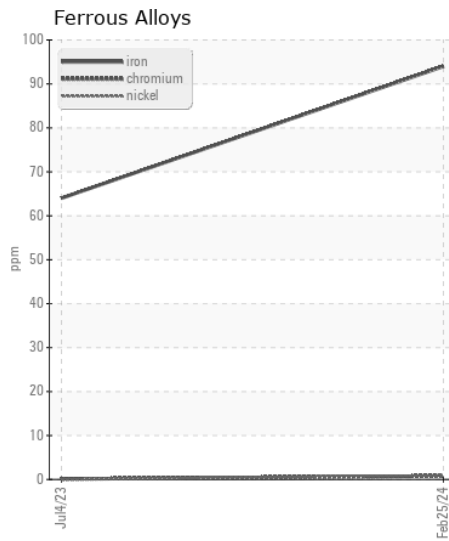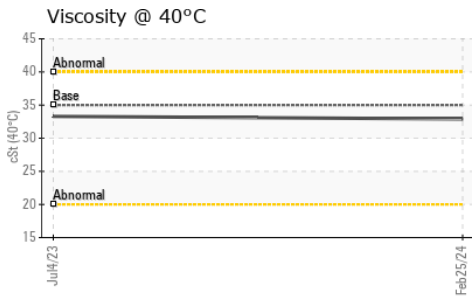

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : CL0005205
Lab Number : 06103956
Unique Number : 10902186
Test Package : CONST
Received : 28 Feb 2024
Tested : 29 Feb 2024
Diagnosed : 29 Feb 2024 - Wes Davis

RACE CITY STEEL
 4052 N HWY 16
 DENVER, NC
 US 28037
 Contact: SERVICE MANAGER

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T:
F: